
FED SUP CLASS
5340

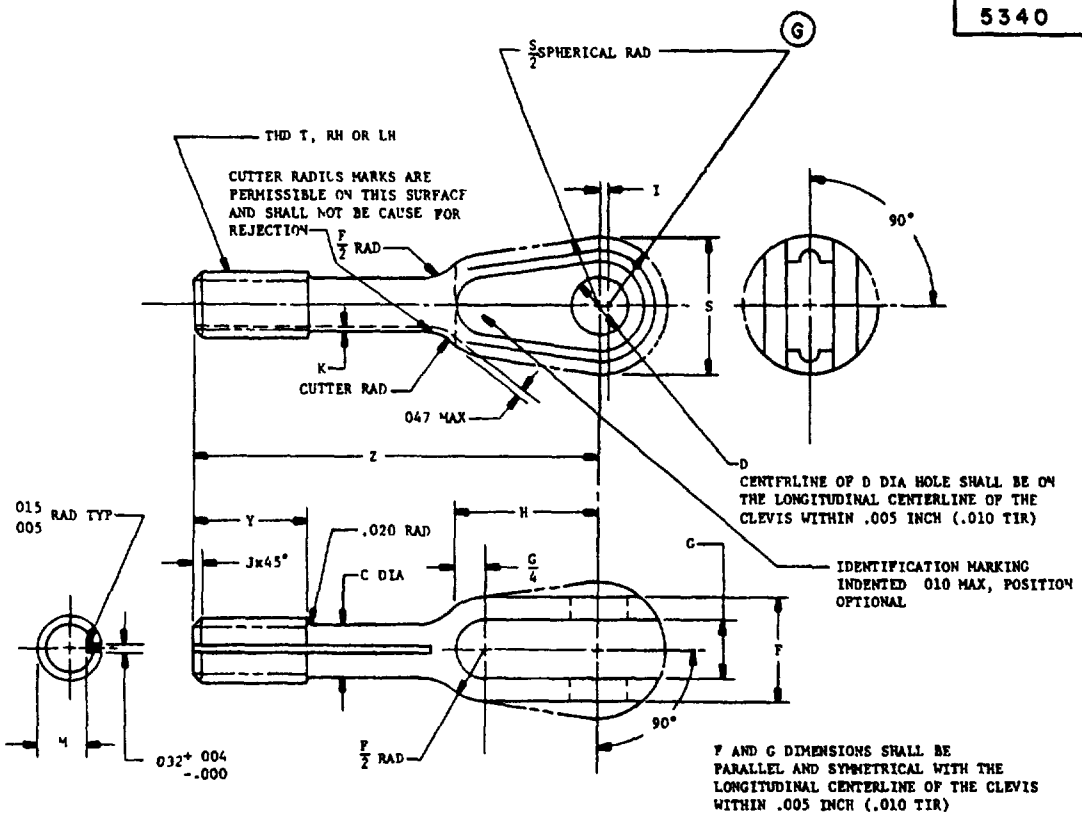

MATERIAL: STEEL, CARBON OR ALLOY IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
PROTECTIVE TREATMENT CADMIUM PLATE, QQ-P-416, TYPE 2, CLASS 2
REMOVE ALL BURRS AND SHARP EDGES
DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±.1/2°.

FIRST LETTER FOLLOWING DASH NUMBER INDICATES DIRECTION OF THREAD (LEFT OR RIGHT HAND) ; SECOND LETTER FOLLOWING DASH NUMBER INDICATES LENGTH (SHORT OR LONG).
EXAMPLE OF PART NUMBER MS21252-2LS= CLEVIS END, NO 6-40 LEFT HAND THREAD, SHORT

FOR CLIP LOCKING OF THE TURNBUCKLES SEE MS33736

MS21252 ITEMS CAN REPLACE AN161 ITEMS OF LIKE THREAD SIZE AND MATERIAL.
MS21252 ITEMS ARE UNIVERSALLY INTERCHANGEABLE WITH THE NAS645 ITEMS OF LIKE THREAD SIZE AND MATERIAL.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCURMENT DOCUMENTS REFERENCED HEREIN

APPROVED 1 NOV 61 REVISED (F) 9 MAR 76 (G) 11 AUG 78

User activities
NAVY — MC

Review activities
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design application and for repetitive use shall be made from this document

(G)

P.A. AIR FORCE - 99 Other Cust NAVY - AS ARMY - ME	TITLE CLEVIS, ROD END, TURNBUCKLE, CLIP LOCKING	MILITARY STANDARD MS21252
PROCUREMENT SPECIFICATION MIL-T-8878	SUPERSEDES AN161, NAS645	SHEET 1 OF 2

DD FORM (SEP 87) 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:29Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design application and for repetitive use shall be made from this document.

Review activities: DLA - IS

User activities: NAVY - MC

P.A. AIR FORCE - 99 (G)

Other Coord NAVY - AS ARMY - ME

PROCUREMENT SPECIFICATION MIL-T-8878

SUPERSEDES AN161, NA3645

TITLE CLEVIS END, TURNBUCKLE, CLIP LOCKING

MILITARY STANDARD

MS 21252

SHEET 2 OF 2

DD, FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(a) DASH NO DIRECTION OF THREAD		WIRE ROPE DIA REF	MIN BREAKING STRENGTH LB	THREAD T UNF-3A	C +.006 -.000 DIA	D +.002 -.000 DIA	F +.010 -.005	G +.010 -.000	H	I +.010 -.000	J +.000 -.015	K MAX	M		S SPHER DIA	Y ±.047	Z ±.047
RH THD	LH THD												MAX	MIN			
-2RS	-2LS	1/16	800	NO.6-40	.094	.190	.250	.109	.375	.031	.031	.0096	1139	1094	.375	.375	1.500
-3RS	-3LS	3/32	1600	NO.10-32	.133	.190	.319	.156				.0077	1638	1568	.500	.500	1.625
-3RL	-3LL																2.500
-4RS	-4LS	1/8	2200	1/4-28	.189	.190	.383	.195	.531			.0103	2224	2152	.547	.563	1.844
-4RL	-4LL	1/8	2200	1/4-28	.189	.190	.383	.195	.531			.0103	.2224	.2152	.547	.563	2.734
-5RS	-5LS	5/32	3200	1/4-28	.189	.250	.452	.218	.531	.047		.0103	2224	.2152	.641	.625	1.844
-5RL	-5LL																2.734
-6RS	-6LS	3/16	4600	5/16-24	.243	.313	.547	.250	.656		.047	.0064	2830	2754	.734	.750	2.031
-6RL	-6LL																2.906
-8RL	-8LL	1/4	8000	3/8-24	.306	.375	.687	.312	.875	.063		.0057	3454	3378	.922	.875	3.188
-9RL	-9LL	9/32	12500	7/16-20	.362	.438	.750	.375	1.000	.078		.0056	4052	3972	1.094	1.000	3.438
-10RL	-10LL	5/16	17500	1/2-20	.425	.500	.844	.437	1.188		.063	.0058	.4678	4597	1.219		3.688

(a) THREADS IN ACCORDANCE WITH MIL-S-7742

INTERCHANGEABILITY TABLE

THE PARTS COVERED BY DASH NUMBERS SHOWN ON AN161 ARE INACTIVATED AND CANCELLED AFTER 10 DECEMBER 1971. USE THE DASH NUMBERS GIVEN IN THE PRECEDING TABLE. THE CANCELLED PARTS SHOULD BE USED UNTIL STOCK IS DEPLETED. USE ONLY THE MS21252 PARTS FOR DESIGN AND SUBSTITUTION. SUBSTITUTION SHALL BE IN ACCORDANCE WITH THIS TABLE

PART NUMBERS	
CANCELLED PART	SUBSTITUTIVE PART
AN161	MS21252
DASH NUMBERS	DASH NUMBERS
5	NONE
8	2
16	3
22	4
32	5
46	6
61	8
80	8
125	9
175	10

FED. SUP CLASS 5340

APPROVED 1 NOV 61 REVISED (G) FOR CHANGES SEE SHEET 1

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:29Z
Check the source to verify that this is the current version before use.