
FED. SUP CLASS 6115

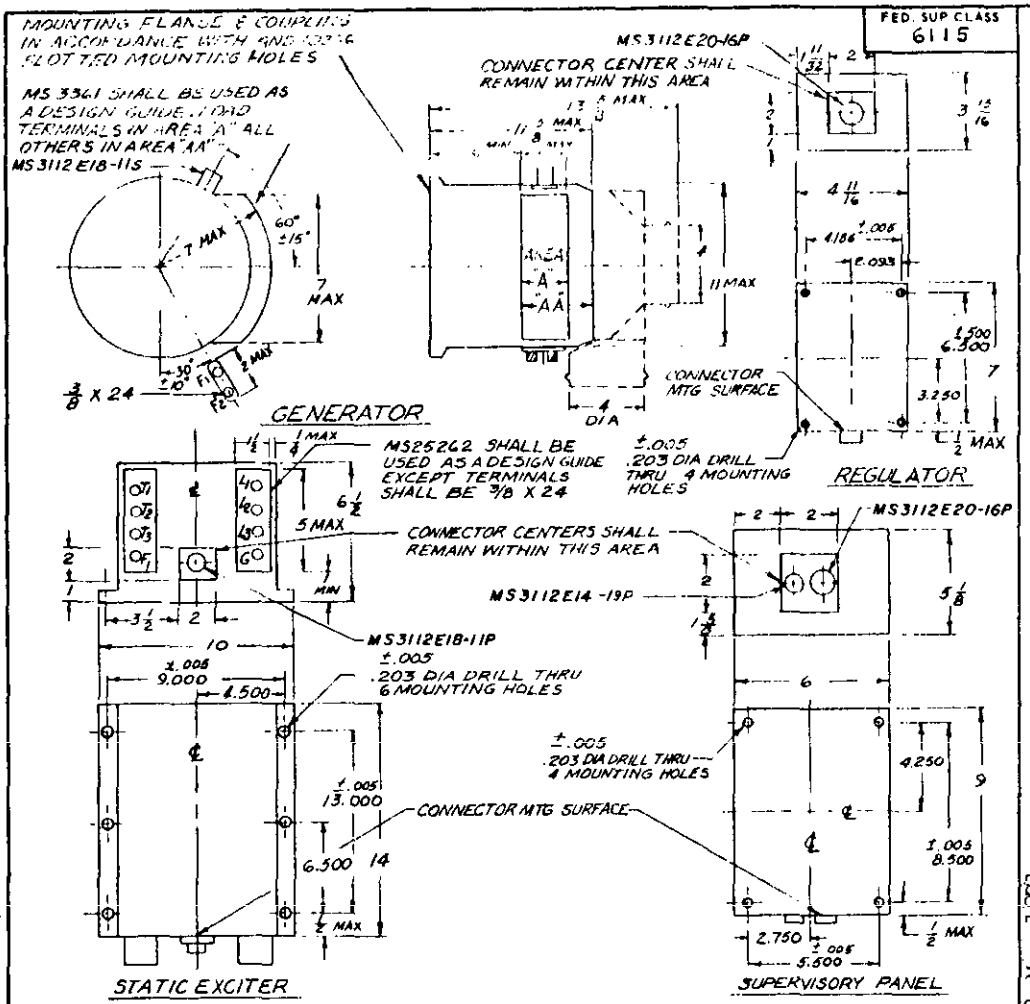

Ⓐ **CANCELED** AFTER 12 May 1971 NO SUPERSEDING STANDARD

GENERATOR DATA	
RATED VOLTAGE	120/208
RATED OUTPUT	60 KVA
PHASE	3
SPEED RANGE	5700-6300 RPM
MAX SPEED FOR REGULATION	6600 RPM
OVERSPEED	7900 RPM
RATED POWER FACTOR	0.75 LAGGING TO 1.0
EFFICIENCY-MIN AT RATED LOAD	82%
MAX WEIGHT	92 LB
OVERHUNG MOMENT--MAX	460 IN-LB
FREQUENCY	380/420 CPS
CLASS	C
SHEAR	6300 IN-LB ±10%
FLEXIBLE DRIVE	NOT REQUIRED

REGULATOR DATA	
REGULATOR WEIGHT-MAXIMUM	6 LB
SUPERVISORY PANEL DATA	
SUPERVISORY PANEL WEIGHT-MAXIMUM	6 LB
STATIC EXCITER DATA	
STATIC EXCITER WEIGHT-MAXIMUM	24 LB

SYSTEMS DATA

TYPE	GENERATOR ROTATION	REGULATOR AND SUPERVISORY PANEL
MS25369-1 MS25369-2	CLOCKWISE COUNTER-CLOCKWISE	AS REQUIRED

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 23 August 1955 REVISED Ⓐ 12 May 1971

P.A. BUREAU OF AERONAUTICS
Other Cust

TITLE
GENERATOR SYSTEM, ALTERNATING CURRENT STATICALLY EXCITED, 60 KVA

MILITARY STANDARD
MS25369(AER)

PROCUREMENT SPECIFICATION
MIL-G-21480 (AER)

SUPERSEDES:

SHEET 1 OF 2


DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the NAVY and is mandatory for use by the activity. All other military activities are required to apply this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.

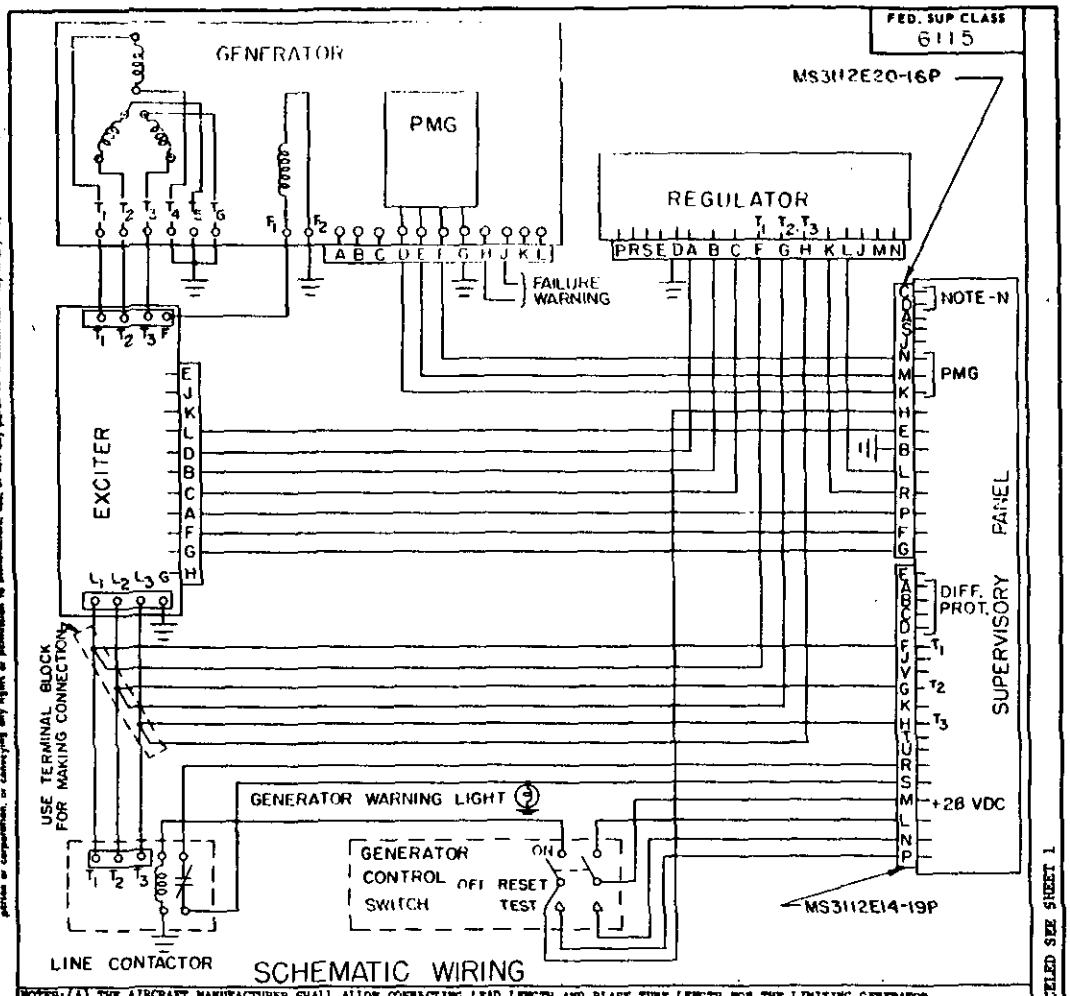

SCHEMATIC WIRING

NOTES: (A) THE AIRCRAFT MANUFACTURER SHALL ALLOW CONNECTING LEAD LENGTH AND BLAST TUBE LENGTH FOR THE LIMITING GENERATOR DIMENSIONS SHOWN ON THIS DRAWING.
(B) THE AIRCRAFT MANUFACTURER SHALL PROVIDE CONNECTING LEADS SHOWN.
(C) THE AIRCRAFT MANUFACTURER SHALL FURNISH MAXIMUM CONTINUOUS CURRENT AND LIMITING RESISTANCE VALUE FOR EACH INTERCONNECTING WIRE.
(D) THE AIRCRAFT MANUFACTURER SHALL ALLOW ADEQUATE CLEARANCE FOR INSTALLING AND REMOVING THE ITEMS SHOWN ON THIS STANDARD FROM THE AIRCRAFT.
(E) WHERE A PERMANENT MAGNET GENERATOR IS USED FOR INTEGRAL CONTROL POWER, IT SHALL RECOVER TO NORMAL VOLTAGE AFTER A SHORT CIRCUIT UNLESS IT CAN BE REMAGNETIZED WITHOUT DISASSEMBLY OF THE GENERATOR.
(F) THE GENERATOR SYSTEM SHALL BE SO DESIGNED THAT UPON REMOVAL OF ANY CONNECTOR PLUG THE GENERATOR AND REGULATOR SHALL BE DEENERGIZED.
(G) DIMENSIONS IN INCHES. TOLERANCE: ±1/64 INCH UNLESS OTHERWISE SPECIFIED.
(H) ALL OUTLINE DIMENSIONS ARE LIMITING DIMENSIONS ONLY.
(I) THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
(J) REFERENCED DOCUMENTS ARE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
(K) ENVELOPE DIMENSIONS SHOWN INCLUDE SHOCK MOUNT EXCURSIONS, IF USED.
(L) GENERATOR GROUND WIRES TO BE AT LEAST AS LARGE AS FEEDER LINE WIRES.
(M) SELF COOLING REQUIRED. REFERENCE PARAGRAPH 6.3(S).
(N) PINS C&D FOR CONSTANT SPEED DRIVE INTERLOCK WHERE USED.
(O) EXCITER GROUND LEAD CAPABLE OF CARRYING MAXIMUM GENERATOR FAULT CURRENT.
(P) GENERATOR CONTROL SWITCH AND LINE CONTACTOR SHOWN FOR INTERCONNECTIONS ONLY.
(Q) EQUIPMENT MANUFACTURER SHALL USE ONLY THOSE TERMINALS AND INTERCONNECTING WIRES SHOWN, FOR SYSTEM DESIGN.
(R) COMPONENTS SHOWN ENCLOSED IN DOTTED LINES NOT FURNISHED UNDER THIS DRAWING.
(S) THE CIRCUIT RESISTANCE FROM THE GENERATOR FIELD TO THE STATIC EXCITER SHALL NOT EXCEED 0.04 OHMS. THIS CIRCUIT SHALL BE A MINIMUM OF 0.04 OHMS DURING PREPRODUCTION TESTS.
(T) USE OF ADDITIONAL CONNECTIONS SHALL BE APPROVED BY BUAER.

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.

APPROVED 12 August 1958 REVISED (A) CANCELED SIZE SHEET 1

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Department of the NAVY and its use by that activity. All other military activities are required to employ this standard where suitable.

P.A BUREAU OF AERONAUTICS Other Cust	TITLE GENERATOR SYSTEM, ALTERNATING CURRENT, STATICALLY EXCITED, 60 KVA	MILITARY STANDARD MS 25369 (AER)
PROCUREMENT SPECIFICATION MIL-G 21480 (AER)	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-156/653

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:09Z
Check the source to verify that this is the current version before use.