
FED. SUP CLASS
4730

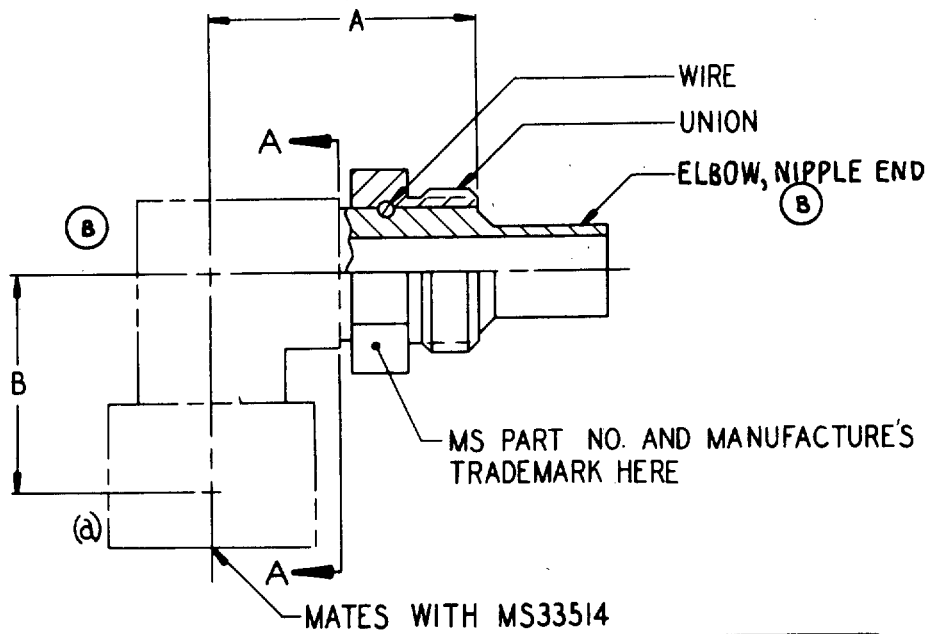

MS PART NO.	WIRE	(B) UNION NIPPLE	(B) ELBOW, NIPPLE END	A ±.035	B ±.035
MS27388-10C	MS27072-10C	MS27071-10C	MS27394-10C	1.315	1.392
MS27388-10		MS27071-10D	MS27394-10D		
MS27388-12C	MS27072-12C	MS27071-12C	MS27394-12C	1.808	1.626
MS27388-12		MS27071-12D	MS27394-12D		
MS27388-16C	MS27072-16C	MS27071-16C	MS27394-16C	1.901	1.776
MS27388-16		MS27071-16D	MS27394-16D		
MS27388-20C	MS27072-20C	MS27071-20C	MS27394-20C	2.180	2.056
MS27388-20		MS27071-20D	MS27394-20D		
MS27388-24C	MS27072-24C	MS27071-24C	MS27394-24C	2.500	2.438
MS27388-24		MS27071-24D	MS27394-24D		

(B) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE THREADED SECTION OF THE UNION AND THE CENTERLINE OF THE INSERT.

(B) "B" IN THE DIMENSION BETWEEN THE CENTERLINE OF THE NIPPLE AND THE END OF THE INSERT.

(B) FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 2 May 66 REVISED (A) 6 Mar 69 (B) 30 Jun 72

P.A. Air Force-11 (B) Other Cust Army-AC Navy-AS	TITLE ELBOW SUB ASSEMBLY, FLARELESS, 90°, SWIVEL NUT	MILITARY STANDARD MS27388
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

User: Activities: Army-WC, ME, MI

Review Activities: Army-AV Navy-AS Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL : SUFFIX "C" : CORROSION RESISTING STEEL, SUFFIX "D" : ALUMINUM ALLOY, NO SUFFIX : COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL, SEE MS STANDARDS LISTED ON SHEET 1 FOR MATERIAL SPECIFICATIONS.
CORROSION RESISTING STEEL : DO NOT PASSIVATE. ALUMINUM ALLOY : ANODIZE SPECIFICATION MIL-A-8625, TYPE II, DYE YELLOW.

THESE PARTS FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

ANY BENT TUBE DESIGN OF ADAPTER COMPONENTS TO THE LEFT OF PLANE A-A IS ACCEPTABLE PROVIDED : DIM'S "A" AND "B", THE MATERIALS SPECIFIED, THE FABRICATION NOTES OF THIS STANDARD AND REQUIREMENTS OF THE PROCUREMENT SPECIFICATION ARE MET.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER, EXAMPLE : MS27388-10CL.

NEXT ASSEMBLY MS27383

(B) THE INSIDE DIAMETER ID OF THE ELBOW SHALL NOT BE LESS THAN THE ID OF THE NIPPLE. OVALITY SHALL NOT EXCEED 7.5 PERCENT OF THE NOMINAL TUBING OUTSIDE DIAMETER. THE MINIMUN WALL THICKNESS AT THE ELBOW BEND SHALL NOT BE LESS THAN .034 INCH FOR THE -10 THRU -20 SIZES, AND .044 INCH FOR THE -24 SIZE.

APPROVED 2 May 66 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2.

User Activities: Army-WC, ME, MI

Review Activities: Army-AV, Navy-AS, Air Force-82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

P.A. Air Force - 11 (B) Other Cust Army - AV Navy - AS	TITLE ELBOW SUB ASSEMBLY, FLARELESS, 90°, SWIVEL NUT	MILITARY STANDARD MS27388
Procurement Specification MIL-F-27272	SUPERSEDES: -	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.