INCH-POUND

MS3443B
1 March 2007
SUPERSEDING
MS3443A
05 September 1975


DETAIL SPECIFICATION SHEET

# CONNECTORS, RECEPTACLE, ELECTRICAL, SOLDER OR WELDED FLANGE MOUNT, BAYONET COUPLING, SOLDER PIN CONTACT, CLASS H, SERIES 2

Inactive for new design after 15 December 1998.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

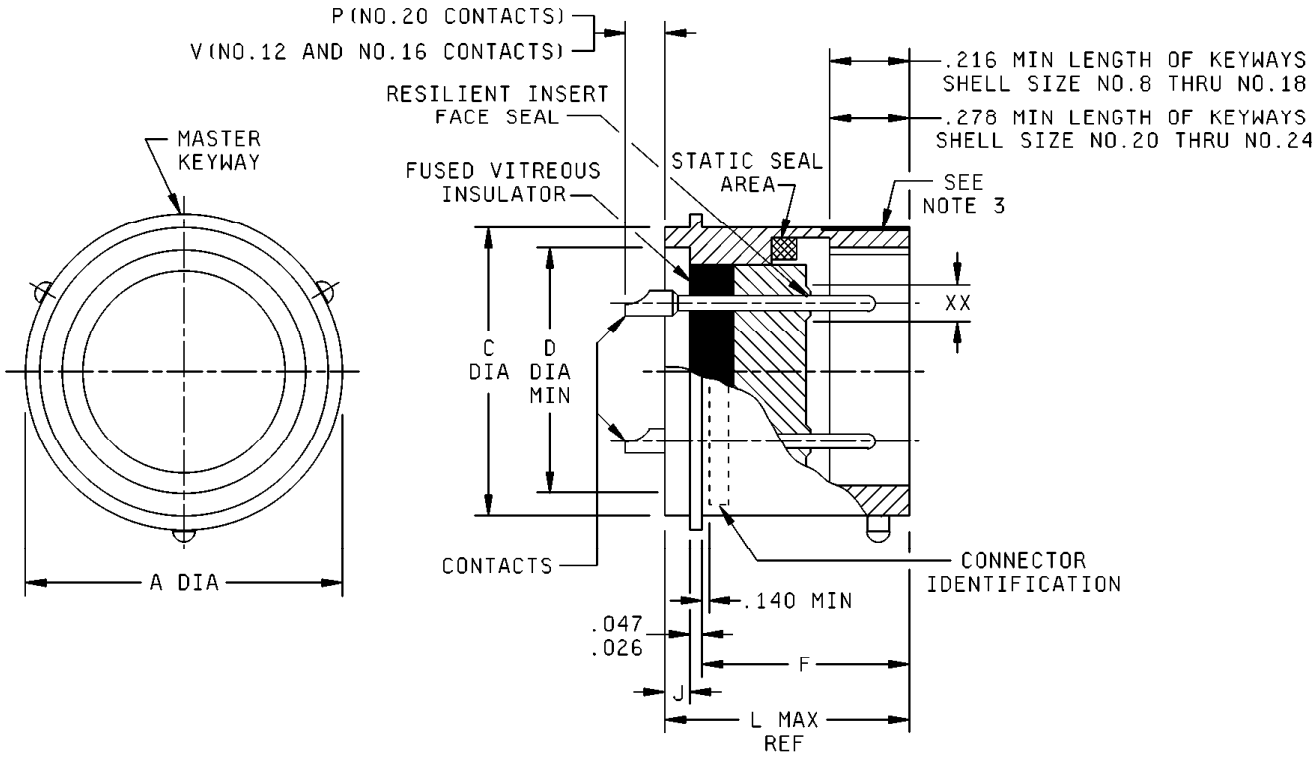


NOTE: For “XX”, see note 4 and table I for contact cavities requiring reduced dimensions.

FIGURE 1. Receptacle, class H, dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.


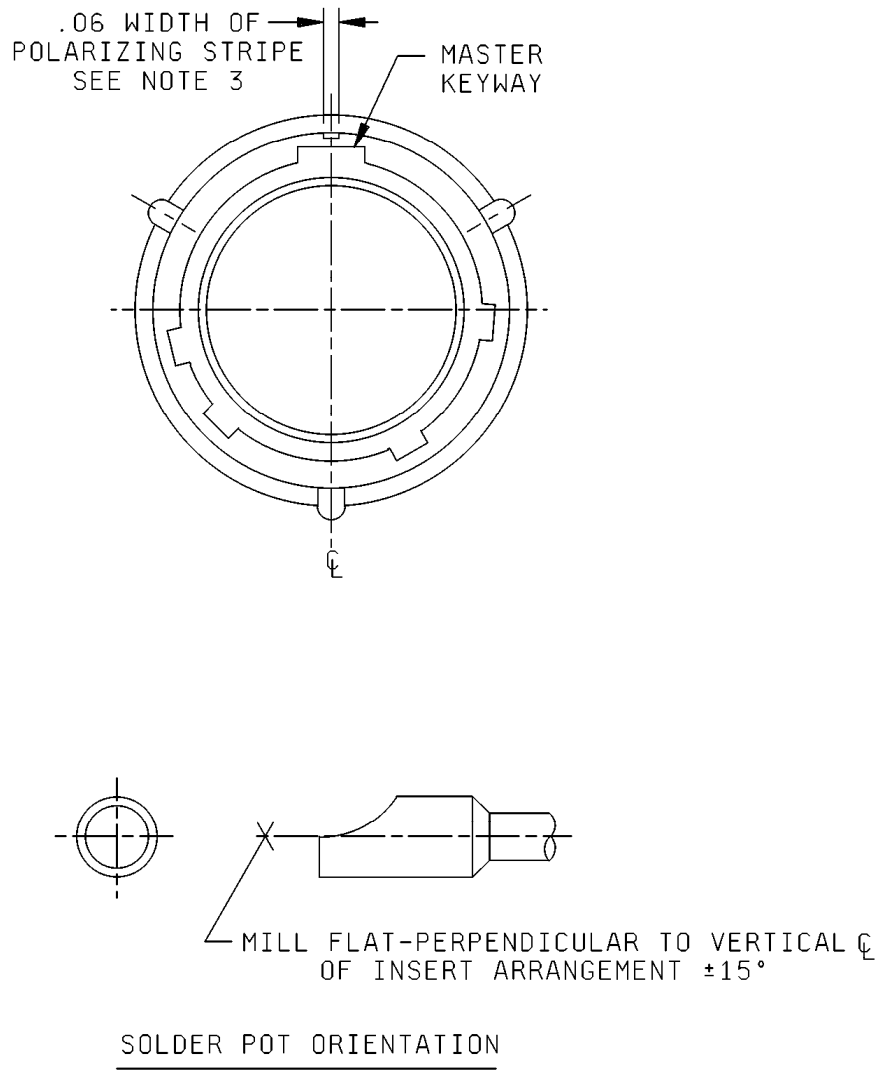



FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

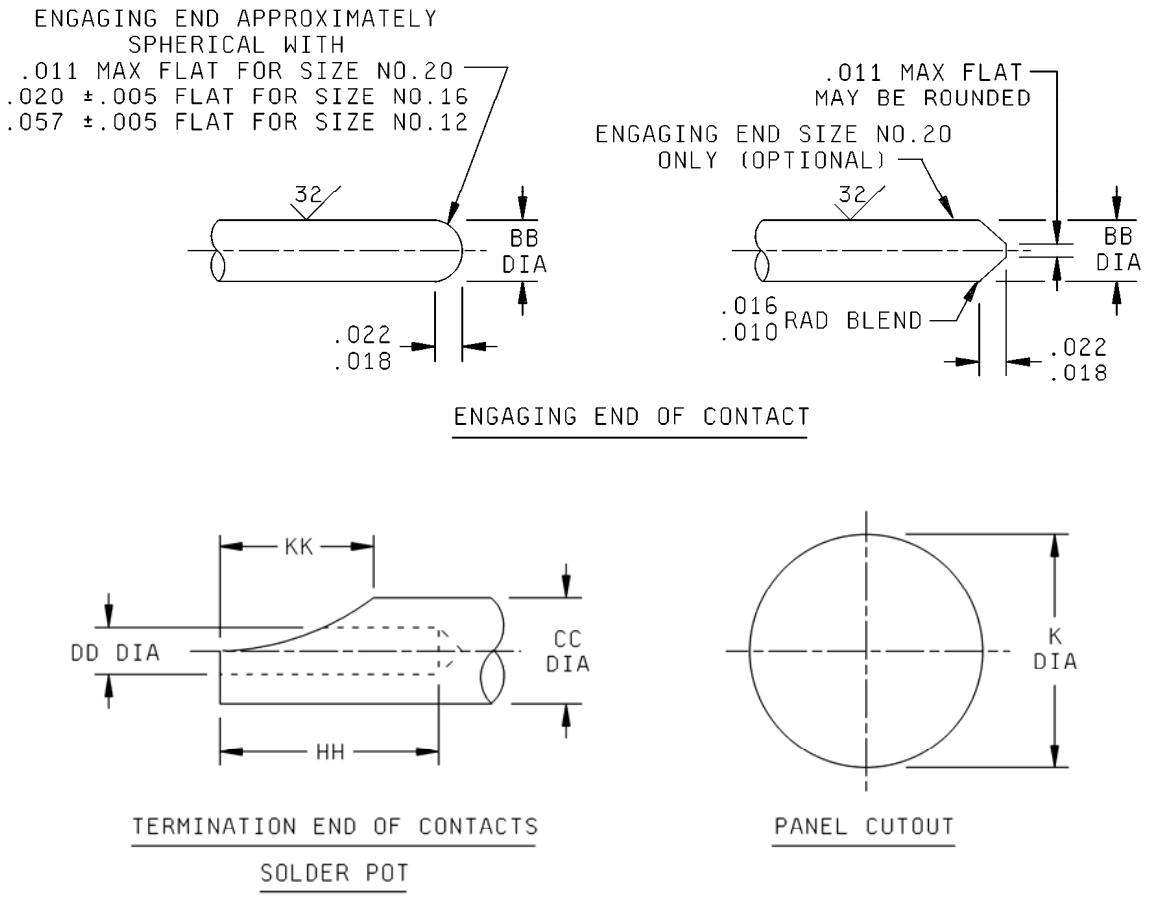


| Contact size | BB | CC | DD | HH | KK |
|---|---|---|---|---|---|
| 20 | .041 (1.04)<br>.039 (0.99) | .088 (2.24)<br>.061 (1.55) | .048 (1.22)<br>.042 (1.07) | .188 (4.78)<br>.109 (2.77) | .110 (2.79)<br>.068 (1.73) |
| 16 | .0635 (1.61)<br>.0615 (1.56) | .116 (2.95)<br>.096 (2.44) | .075 (1.91)<br>.069 (1.75) | .251 (6.38)<br>.172 (4.37) | .141 (3.58)<br>.109 (2.77) |
| 12 | .095 (2.41)<br>.093 (2.36) | .150 (3.81)<br>.130 (3.30) | .122 (3.10)<br>.112 (2.84) | .251 (6.38)<br>.172 (4.37) | .141 (3.58)<br>.109 (2.77) |

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

| Shell size | A | C | D | F |
|---|---|---|---|---|
| 8 | .635 (16.13)<br>.615 (15.62) | .563 (14.30)<br>.557 (14.15) | .403 (10.24) | .598 (15.19) |
| 10 | .760 (19.30)<br>.740 (18.80) | .673 (17.09)<br>.667 (16.94) | .515 (13.08) | |
| 12 | .854 (21.69)<br>.834 (21.18) | .782 (19.86)<br>.776 (19.71) | .630 (16.00) | |
| 14 | .979 (24.87)<br>.959 (24.36) | .907 (23.04)<br>.901 (22.89) | .755 (19.18) | |
| 16 | 1.104 (28.04)<br>1.084 (27.53) | 1.032 (26.21)<br>1.026 (26.06) | .880 (22.35) | |
| 18 | 1.228 (31.19)<br>1.208 (30.68) | 1.157 (29.39)<br>1.151 (29.24) | .980 (24.89) | |
| 20 | 1.322 (33.58)<br>1.302 (33.07) | 1.251 (31.78)<br>1.245 (31.62) | 1.105 (28.07) | .660 (16.76) |
| 22 | 1.448 (36.78)<br>1.428 (36.27) | 1.376 (34.95)<br>1.370 (34.80) | 1.230 (31.24) | |
| 24 | 1.574 (39.98)<br>1.554 (39.47) | 1.501 (38.13)<br>1.495 (37.97) | 1.385 (35.18) | |

| Shell size | J | K | L | P | V | Max weight lbs (grams) |
|---|---|---|---|---|---|---|
| 8 | .156 (3.96)<br>.116 (2.95) | .570 (14.48) | .801 (20.35) | .178 (4.52)<br>.118 (3.00) | .248 (6.30)<br>.188 (4.78) | .0310 (14.07) |
| 10 | | .680 (17.27) | | | | .0340 (15.43) |
| 12 | | .789 (20.04) | | | | .0400 (18.16) |
| 14 | | .914 (23.22) | | | | .0510 (23.15) |
| 16 | | 1.039 (26.39) | | | | .0620 (28.15) |
| 18 | | 1.164 (29.57) | | | | .0820 (37.23) |
| 20 | | 1.258 (31.95) | .863 (21.92) | | | .1000 (45.40) |
| 22 | .188 (4.78)<br>.148 (3.76) | 1.383 (35.13) | .895 (22.73) | .146 (3.71)<br>.086 (2.18) | .216 (5.49)<br>.156 (3.96) | .1150 (52.21) |
| 24 | | 1.508 (38.30) | | | | .2680 (121.67) |

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

| Inches | mm |
|---|---|
| .005 | 0.13 |
| .010 | 0.25 |
| .011 | 0.28 |
| .016 | 0.41 |
| .020 | 0.51 |
| .022 | 0.56 |
| .026 | 0.66 |
| .047 | 1.19 |
| .057 | 1.45 |
| .06 | 1.5 |
| .088 | 2.23 |
| .140 | 3.56 |
| .216 | 5.49 |
| .278 | 7.06 |

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Dimensional tolerances are .XX ± .01, .XXX ± .005. Angular dimensions are Xº ± 1°.
3. Polarizing stripes, color optional.
4. Insert arrangements requiring reduced diameters for raised seal barrier on outer row of contact cavities as indicated.
5. True position (TP) tolerances specified are in accordance with ASME Y14.5M.

FIGURE 1. Receptacle, class H, dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

TABLE I. Contact cavities requiring reduced diameters (XX) for pins and sockets in outer row of contact cavities. 1/

| Shell size | Insert arrangement | Contact cavities |
|---|---|---|
| 8 | -33 & -98 | A, B, C. |
| 12 | -10 | C, G. |
| 14 | -12 | A, B, C, D, E, F, G, H. |
| 14 | -18 | A, C, E, G, J, L. |
| 14 | -19 | B, D, F, H, K, M. |
| 16 | -26 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R. |
| 18 | -32 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T. |
| 22 | -41 | A, B, C, D, E, F, G, H, J, K, L, M, N, P, R, S, T, U, V, W, X, Y. |

1/ The reduced diameter “XX” refers to the diameters of the raised seal barriers (pin barrier rings) or lead-in chamfers (socket entry holes) to ensure proper sealing of pin and socket after mating. See MIL-DTL-26482, connector intermateability control dimensions (series 1 and series 2) figure for reduced diameter “XX” for contact size 20 only.

REQUIREMENTS:


Dimensions and configuration: See figure 1 and table I.
Connector mating: This connector mates with MS3475 and MS3476.
For insert arrangement: See MIL-STD-1669.
Intermateability dimensions are in accordance with MIL-DTL-26482.

Material:
Shell types A and B, 300 series stainless steel in accordance with ASTM A582/A582M and ASTM A276 (weld only, not intended for solder applications).
Shell type C, cold rolled steel in accordance with ASTM A108 (intended for solder applications only).

Finish:
Shell types A and B, passivated in accordance with ASTM A967.
Shell type C, .0001 inch (2.54 µm) tin minimum in accordance with ASTM B545 or ASTM B339 over nickel in accordance with SAE AMS-QQ-N-290.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.

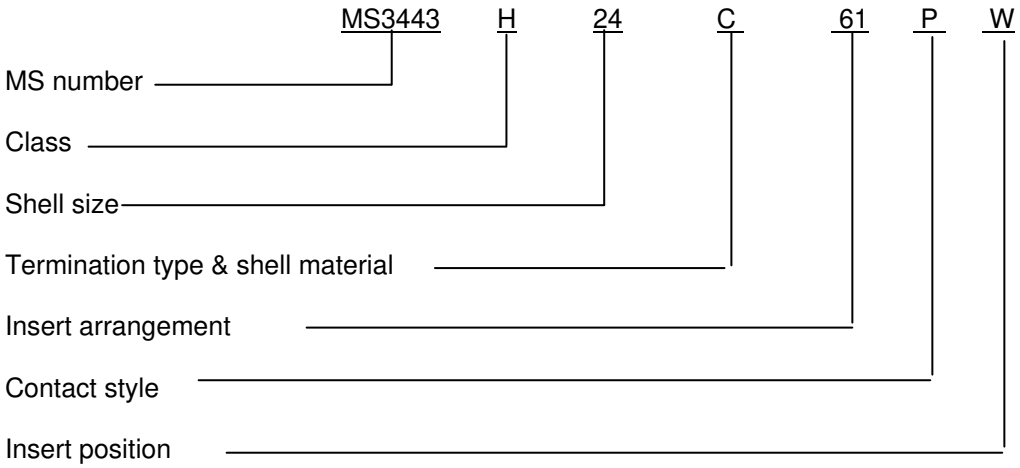


Supersession data: PIN MS3443H*C*** supersedes PINs MS3443H*A*** and MS3443H*B***.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3475
MS3476
MIL-STD-1669
ASME Y14.5M
ASTM A108
ASTM A276
ASTM A967
ASTM A582/A582M
ASTM B339
ASTM B545
SAE AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4656-010)

Review activities:
Army - AV
Navy - EC, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:05Z
Check the source to verify that this is the current version before use.