INCH-POUND

MS3481A
w/AMENDMENT 1
24 May 2018
SUPERSEDING
MS3481A
1 March 2007

DETAIL SPECIFICATION SHEET

TOOL, CONNECTOR ASSEMBLY, FOR MIL-DTL-26482 CONNECTORS

Reactivated after 1 March 2007 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26482.

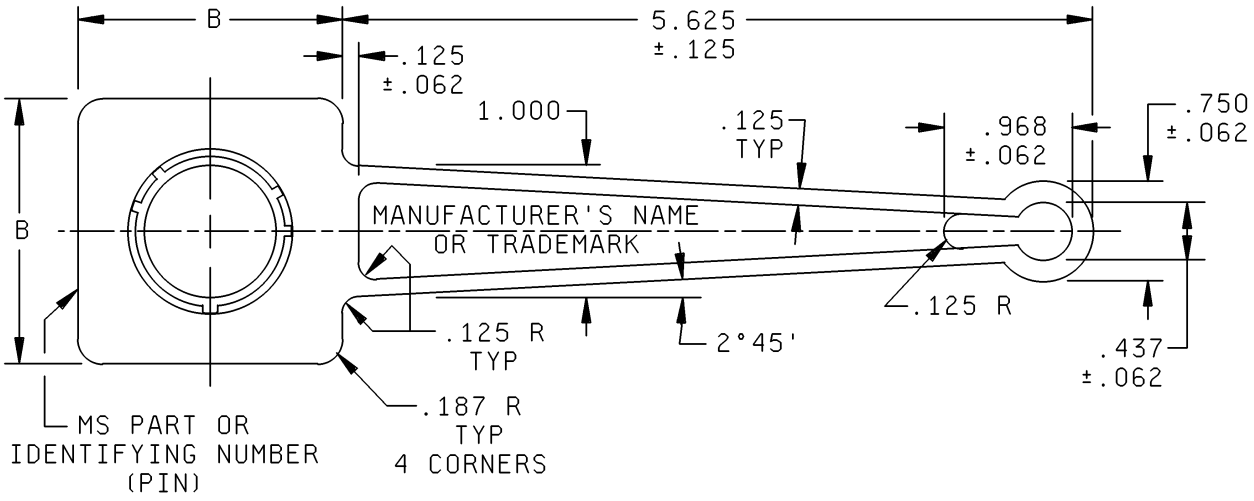


FIGURE 1. Tool, dimensions and configurations.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

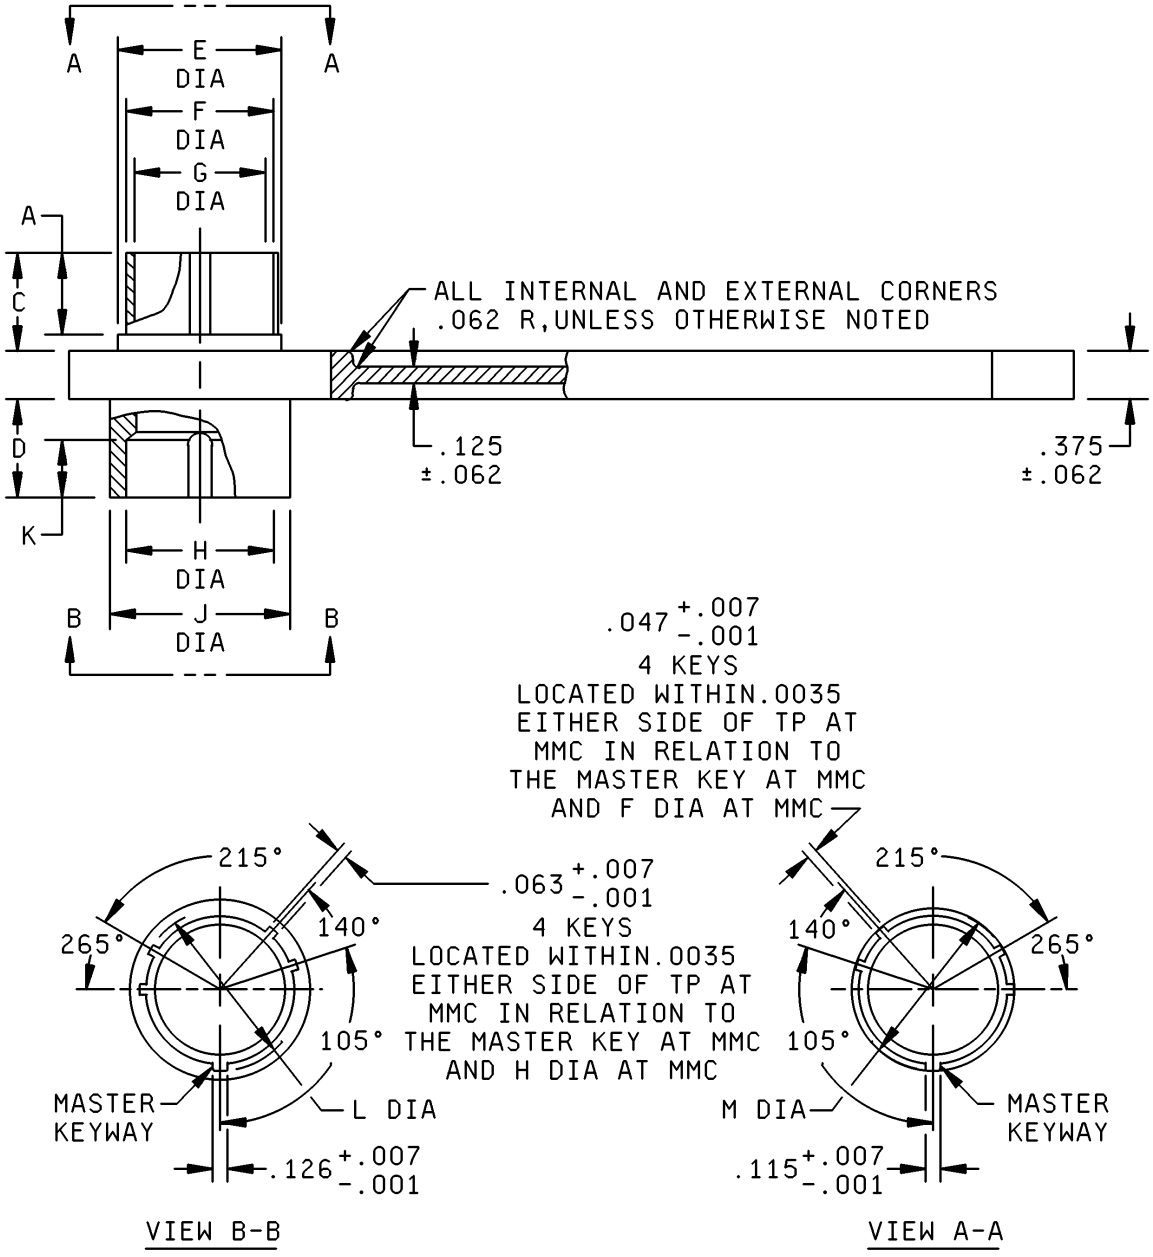


FIGURE 1. Tool, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

Dash number	Shell size	A ± .030	B ± .060	C approx	D approx	E dia approx	F dia + .001 - .005
-08	8	.380 (.015)	1.250 (.049)	.410 (.016)	.455 (.018)	.473 (.019)	.357 (.014)
-10	10					.590 (.023)	.485 (.019)
-12	12					.750 (.030)	.597 (.024)
-14	14					.875 (.034)	.722 (.028)
-16	16		2.000 (.079)			1.000 (.039)	.847 (.033)
-18	18					1.125 (.044)	.947 (.037)
-20	20	.425 (.017)		.495 (.019)	.540 (.021)	1.250 (.049)	1.072 (.042)
-22	22					1.375 (.054)	1.197 (.047)
-24	24					1.500 (.059)	1.322 (.052)

Shell size	G dia min	H dia + .005 - .001	J dia + .001 - .005	K min	L dia + .005 - .006	M dia + .001 - .010
8	.292 (.011)	.362 (.014)	.473 (.019)	.281 (.011)	.412 (.016)	.402 (.016)
10	.409 (.016)	.490 (.019)	.590 (.023)		.540 (.021)	.530 (.021)
12	.523 (.021)	.607 (.024)	.750 (.030)		.689 (.027)	.679 (.027)
14	.648 (.026)	.732 (.029)	.875 (.034)		.814 (.032)	.804 (.032)
16	.772 (.030)	.857 (.034)	1.000 (.039)		.939 (.037)	.929 (.037)
18	.862 (.034)	.962 (.038)	1.125 (.044)		1.039 (.041)	1.029 (.041)
20	.987 (.039)	1.087 (.043)	1.250 (.049)	.343 (.014)	1.164 (.046)	1.154 (.045)
22	1.111 (.044)	1.212 (.048)	1.375 (.054)		1.289 (.051)	1.279 (.050)
24	1.237 (.049)	1.337 (.053)	1.500 (.059)		1.414 (.056)	1.404 (.055)

NOTES:

1. Dimensions are in inches. Metric equivalents are given in parentheses for information only.
2. Unless otherwise specified, tolerances shall be ± .016 for decimals. Angular tolerances are TP.


FIGURE 1. Tool, dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
These tools are for use with connectors in accordance with MIL-DTL-26482.
Shell material: High grade aluminum alloy.
Handle material: Die cast aluminum alloy in accordance with ASTM-B85/B85M.
Finish: Nickel plate in accordance with SAE-AMS-QQ-N-290.
All burrs and sharp edges shall be removed.

PIN example:

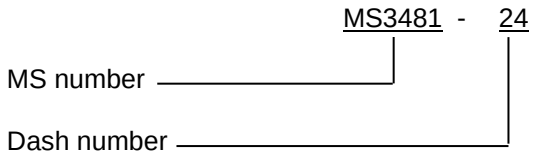

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

ASTM-B85/B85M
SAE-AMS-QQ-N-290

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2018-087)

Review activities:
Army - GL
Navy - EC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:07Z
Check the source to verify that this is the current version before use.