
FED. SUP CLASS
6640

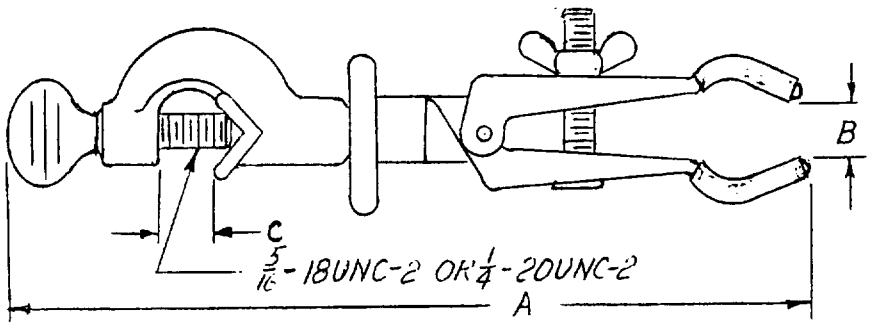

PART NUMBER	DIMENSIONAL DATA (INCH) A O/A LENGTH FULLY CLOSED	B MAX DIA JAW OPENING	C MAX DIA ROD ACCOMMODATED	JAW SLEEVE
MS36013-1	7.0 ± 0.25	1.50	0.687	Vinyl
MS36013-2	7.0 ± 0.25	1.50	0.687	Fiberglass
MS36013-3	7.5 ± 0.25	2.25	0.687	Vinyl
MS36013-4	7.5 ± 0.25	2.25	0.687	Fiberglass

MATERIAL: Clamps shall be aluminum alloy in accordance with Federal Specification QQ-A-591, No. 380 or zinc-base alloy in accordance with Federal Specification QQ-Z-363, Composition A or corrosion-resistant steel in accordance with Federal Specification QQ-S-763, Class 202 or 302.

Spring shall be of phosphor bronze in accordance with Federal Specification QQ-B-750, Composition A or corrosion-resistant steel in accordance with Federal Specification QQ-S-763, Class 202 or 302.

Fittings shall be forged aluminum in accordance with Federal Specification QQ-A-367, Composition 2017, or chemical resistant zinc alloy or corrosion-resistant steel in accordance with QQ-S-763, Class 202 or 302. Zinc-base alloy clamps and clamp holders may have copper alloy fittings in accordance with Federal Specification QQ-C-523 or QQ-C-525.

Plastic sleeves shall be formed by hot dipping the clamp jaw in vinyl plastisol in accordance with Military Specification MIL-P-20689, Type II.

Fiberglass sleeves shall be woven non-raveling slip on type.

DESIGN: Threads shall be in accordance with Federal Handbook H28, Unified National Coarse Thread Series. Screws shall have one and one-half inches of thread.

Clamp shall be capable of being extended approximately one inch and shall attach directly to rods up to one half inch in diameter without passing over the rod ends or shall be capable of attachment to rods up to 11/16 inch in diameter by passing over the rod ends.

Clamp shall consist of a V-grooved holder fitted with thumbscrew for attachment to support rods and a spring type clamp.

Clamp jaws shall be curved and adjustable up to an angle of 360 degrees and positioned fixed by means of a locknut on the extension shaft.

Holder jaws shall be V-shape.

Ⓒ ENTIRE STANDARD REVISED

APPROVED 23 Dec 1959 REVISED Ⓐ 15 Dec 1967 Ⓑ 9 Oct 1975 Ⓒ 4 Dec 1985

USER ACTIVITIES: ARMY - ME, NAVY - MS, AIR FORCE - 03

REVIEWER ACTIVITIES: ARMY - MD, NAVY - AS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		CLAMP, UTILITY, LABORATORY SWIVEL JAW	MS36013
Procurement Specifications MIL-C-440	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PROJECT NUMBER 6640-1312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

2. For design feature purposes, this standard takes precedence over procurement document referenced herein.

3. Referenced documents shall be of the issue in effect on date of invitations for bid.

4. FSCM: 22527, 87664.

USER ACTIVITIES:

REVIEWER ACTIVITIES:

APPROVED

REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. / Other Cust	INTERNATIONAL INTEREST	TITLE: CLAMP, UTILITY, LABORATORY SWIVEL JAW	MILITARY STANDARD MS 36013
Procurement Specifications	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.