
FED. SUP CLASS
5305

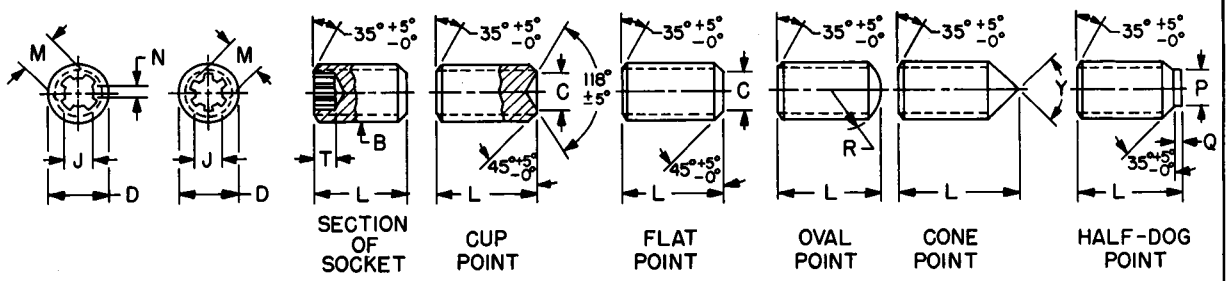

D	NOMINAL DIAMETER	#2 (.086)	#4 (.112)	#6 (.138)
B	THREADS PER INCH	56NC-3A	40NC-3A	32NC-3A
C	CUP AND FLAT POINT DIAMETER MAX	.047	.061	.074
	MIN	.039	.051	.064
R	OVAL POINT RADIUS	.0625	.084	.1094
Y	CONE POINT ANGLE: 118° ± 2° FOR THESE LENGTHS AND UNDER	3/32	1/8	1/8
	CONE POINT ANGLE: 90° ± 2° FOR THESE LENGTHS AND OVER	7/64	5/32	3/16
P	HALF DOG DIAMETER MAX	.057	.075	.092
	MIN	.053	.070	.087
Q	POINT LENGTH	.022	.028	.035
J	SOCKET DIAMETER MINOR MAX	.038	.051	.056
	MIN	.0375	.050	.055
M	SOCKET DIAMETER MAJOR MAX	.050	.062	.079
	MIN	.049	.061	.078
N	SOCKET LAND AND WIDTH MAX	.017	.014	.023
	MIN	.016	.013	.022
	NUMBER OF FLUTES	4	6	4
T	KEY ENGAGEMENT MIN	.028	.040	.050

KEY ENGAGEMENT: These dimensions apply to screws one diameter in length or longer. For screws shorter than one diameter in length, socket to be as deep as practicable.
MATERIAL: Steel, high-grade alloy, in accordance with procurement specification.
HARDNESS: Setscrews shall be hardened by heat treatment to a hardness of Rockwell C45 to 53.
PROTECTIVE COATING: Cadmium plated, in accordance with Specification QQ-P-416, Type II, Class 3.
THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.
DIMENSIONS: All dimensions are in inches unless otherwise specified.
PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51053-101.
NOTES: (1) Referenced documents shall be of the issue in effect on date of invitation for bid.
(2) This standard takes precedence over documents referenced herein.

Ⓐ CANCELLED/INACTIVE AS OF 10 SEP 1969
SUPERSEDED IN PART BY MS51963, MS51965, MS51973, MS51977 AND MS51981 – SEE SHEET 2.

Ⓐ FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 7 MAY 1958 REVISED Ⓐ 10 SEP 1969

REVIEWER:
USER:

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust SH 82	TITLE SETSCREW, FLUTED SOCKET, ALLOY STEEL, CADMIUM PLATED, NC-3A	MILITARY STANDARD MS51053
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Continued) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-23T17:56Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

		CUP POINT			FLAT POINT			CONE POINT		
		#2 56NC	#4 40NC	#6 32NC	#2 56NC	#4 40NC	#6 32NC	#2 56NC	#4 40NC	#6 32NC
LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/16		101	111		201	211		301	311	
1/8		102	112*	126	202	212	226	302	312	326
3/16		103	113	127	203	213	227	303	313	327
1/4		104	114	128	204	214	228	304	314	328
5/16	± 1-1/2%	105	115	129	205	215	229	305	315	329
3/8	of length		116	130		216	230		316	330
7/16	with a		117	131		217	231		317	331
1/2	minimum of ± .010 in.		118	132		218	232		318	332
9/16			119	133		219	233		319	333
5/8			120	134		220	234		320	334
3/4				135			235			335
7/8				136			236			336

		OVAL POINT			HALF-DOG POINT		
		#2 56NC	#4 40NC	#6 32NC	#2 56NC	#4 40NC	#6 32NC
LENGTH	TOLERANCE	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.	DASH NO.
1/16		401	411		501	511	
1/8		402	412	426	502	512	526
3/16		403	413	427	503	513	527
1/4		404	414	428	504	514	528
5/16	± 1-1/2%	405	415	429	505	515	529
3/8	of length		416	430		516	530
7/16	with a		417	431		517	531
1/2	minimum of ± .010 in.		418	432		518	532
9/16			419	433		519	533
5/8			420	434		520	534
3/4				435			535
7/8				436			536

NOTE: For material, protective coating and other pertinent data, see sheet 1.

(A) Cancelled Dash Numbers 101 thru 111 and 113 thru 136 are superseded in part by MS51963.

Cancelled Dash Numbers 201 thru 236 are superseded in part by MS51965.

Cancelled Dash Numbers 301 thru 336 are superseded in part by MS51973.

Cancelled Dash Numbers 401 thru 436 are superseded in part by MS51981.

Cancelled Dash Numbers 501 thru 536 are superseded in part by MS51977.

* Dash Number 112 is inactive and not to be used for new design.

REVIEWER:
USER:

APPROVED 7 MAY 1958 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. WC Other Cust SH 82	TITLE SETSCREW, FLUTED SOCKET, ALLOY STEEL, CADMIUM PLATED, NC-3A	MILITARY STANDARD MS51053
PROCUREMENT SPECIFICATION FF-S-200	SUPERSEDES:	SHEET 2 OF

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2024-10-25T17:56Z
Check the source to verify that this is the current version before use.