
FED. SUP CLASS
2320

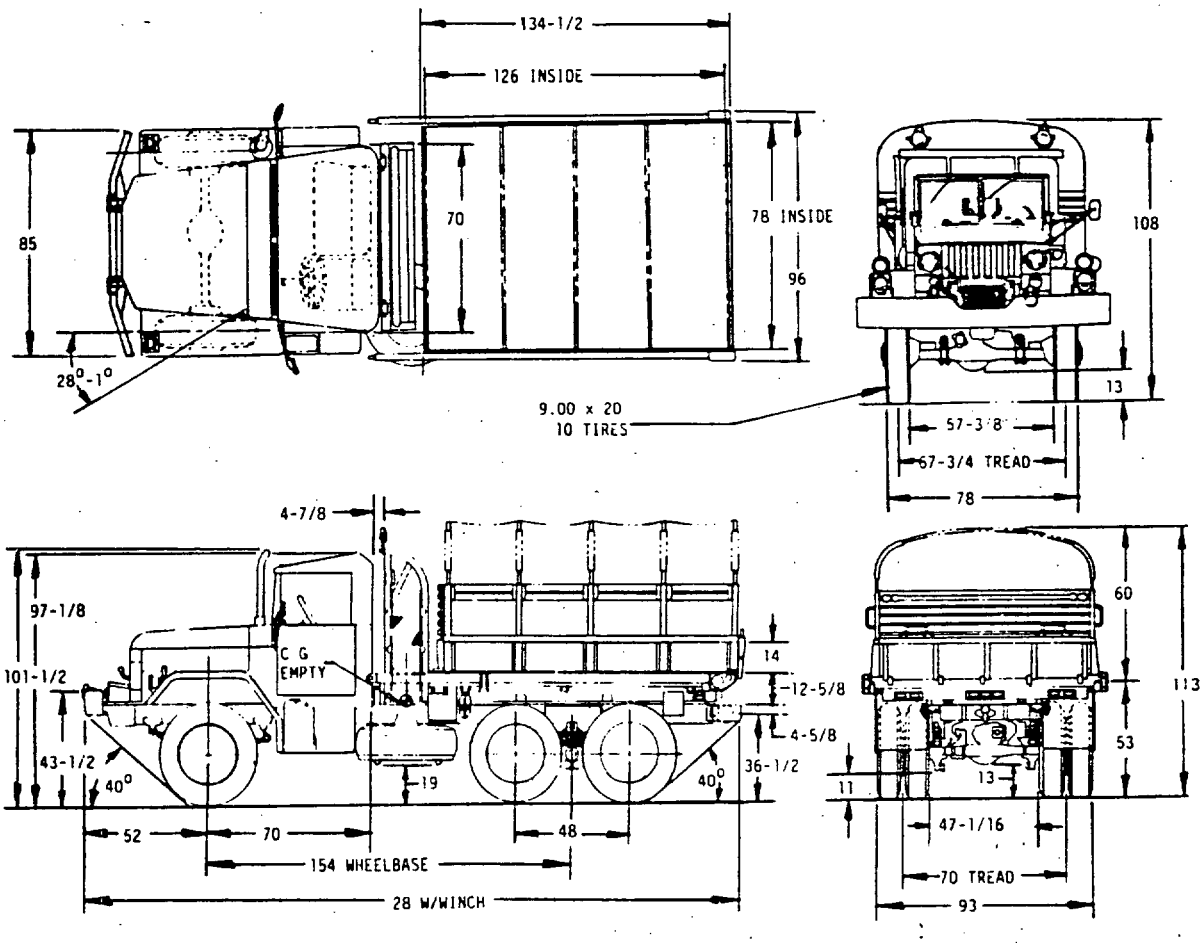

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52153-1	8736769	WITH WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY -AT Other Cust	TITLE TRUCK MAINTENANCE PIPELINE CONSTRUCTION 2-1/2 TON 6x6 M756A2	MILITARY STANDARD MS52153(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

CURB WEIGHT; FULLY EQUIPPED	
LESS PAYLOAD AND CREW	W/W
FRONT AXLE	6,680 LBS
REAR AXLES	10,280 LBS
TOTAL	16,960 LBS
PAYLOAD:	
LOADED	2,000 LBS
GROSS WEIGHT, FULLY EQUIPPED:	
**PLUS PAYLOAD, LESS CREW	
FRONT AXLE	5,284 LBS
REAR BOGIE	18,736 LBS
TOTAL	24,020 LBS
TOWED LOAD ALLOWANCE:	
LOADED	6,000 LBS
SHIPPING DIMENSIONS:	
CU. FT.	1,795
SQ. FT.	193
LENGTH	285 IN
WIDTH	96 IN
HEIGHT	
OVERALL HEIGHT	113 IN
LOWEST OPERABLE	108 IN

CENTER OF GRAVITY: (AT CURB WEIGHT)	
ABOVE GROUND	40.5 IN
REAR OF CENTER LINE OF FRONT AXLE	97.5 IN
CENTER OF GRAVITY LOCATION:	
(W/HIGHWAY PAYLOAD)	
ABOVE GROUND***	50 IN
REAR OF CENTERLINE OF FRONT AXLE***	105 IN
PERFORMANCE:	
AT GROSS WEIGHT W/O TOWED LOAD:	
MAXIMUM SPEED	56 MPH
MAXIMUM GRADE	60 %
CRUISING RANGE (W/DIESEL FUEL)	300 MILES
AT GROSS WEIGHT W/TOWED LOAD:	
MAXIMUM SPEED	45 MPH
MAXIMUM GRADE	45 %
CRUISING RANGE (W/DIESEL FUEL)	275 MILES
PIPE LINE CONSTRUCTION BODY: D8154-2	
EQUIPPED WITH REAR WINCH	7954486
TRANSFER PTO	11609228
AND REAR OR SIDE MOUNTED "A" FRAMES REMOVABLE	
CARGO RACK AND SIDES	

KIT PROVISIONS:

PERSONNEL HEATER (HOT WATER) (ABOVE-25°)	10937799
WINTERIZATION (ARCTIC - 65°)	10896388
HARDTOP CLOSURE	7095350
POWER PLANT HEATER (COOLANT)	10896394
PERSONNEL HEATER (FUEL BURNING)	10896381
ALCOHOL EVAPORATOR	10937856
SLAVE CABLE	10896518
THERMAL BARRIER	10896619
FORDING	13937874-1
"A" FRAME FRONT	8390117
ELECTRICAL BRAKE	10937002
AIR BRAKE	10937003

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52153-1	8736769	WITH WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY-AT Other Cust	TITLE TRUCK MAINTENANCE PIPELINE CONSTRUCTION 2-1/2 TON 6x6 M756A2	MILITARY STANDARD MS52153(AT)
PROCUREMENT SPECIFICATION MIL-T-46780	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.