DOD-P-63477/6
29 May 1981


METRIC

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, COILED, STANDARD DUTY, CRES 302, METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63477.

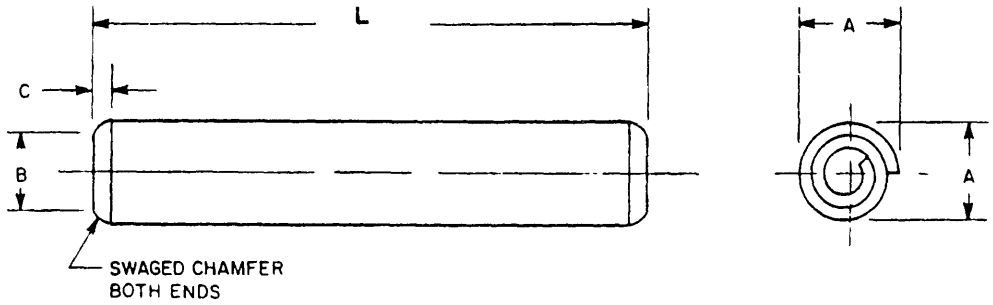

NOTE:

Unless otherwise specified, dimensions are in millimeters.

FIGURE 1. Pin, spring, tubular, coiled, standard duty.

REQUIREMENTS

1. Material: CRES 302.
2. Protective finish: Passivate.
3. Part number: Consists of the letter "D" the basic number of this specification sheet, and a dash number taken from table I.

Example: D63477/6-330

- dash number
- specification sheet number

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Nominal size		0.8	1	1.2	1.5	2	2.5	3	4	5	6	8	10	12	14	16	20
A Diameter	max	0.91	1.15	1.35	1.73	2.25	2.78	3.30	4.40	5.45	6.50	8.63	10.75	12.85	14.95	17.00	21.10
	min	0.85	1.05	1.25	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30	10.35	12.40	14.45	16.45	20.45
B Chamfer diameter	max	0.75	0.95	1.15	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70	13.60	15.60	19.60
C Chamfer length	ref	0.3	0.3	0.4	0.5	0.7	0.7	0.9	1.1	1.3	1.5	2.0	2.5	3.0	3.5	4.0	4.5
Recommended hole size	max	0.84	1.04	1.24	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18	14.18	16.18	20.21
	min	0.80	1.00	1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00
Min double shear force (kN)		0.26	0.44	0.62	1.00	1.80	2.50	4.00	7.10	11.40	16.00	28.00	46.40	59.10	87.20	111.00	182.00
L - Length	Tol	Dash numbers															
4	+0.5 0	3	43	83	123	163											
6	+0.5 0	4	44	84	124	164	204	244									
8	+0.5 0	5	45	85	125	165	205	245	285								
10	+0.5 0	6	46	86	126	166	206	246	286	326							
12	+1.0 0	7	47	87	127	167	207	247	287	327	367						
14	+1.0 0	8	48	88	128	168	208	248	288	328	368						
16	+1.0 0	9	49	89	129	169	209	249	289	329	369	409					
18	+1.0 0				130	170	210	250	290	330	370	410					
20	+1.0 0				131	171	211	251	291	331	371	411	451				
22	+1.0 0				132	172	212	252	292	332	372	412	452				
24	+1.0 0				133	173	213	253	293	333	373	413	453				
26	+1.0 0				134	174	214	254	294	334	374	414	454	494			
28	+1.0 0					175	215	255	295	335	375	415	455	495			
30	+1.0 0					176	216	256	296	336	376	416	456	496	536		
32	+1.0 0					177	217	257	297	337	377	417	457	497	537		
36	+1.0 0					178	218	258	298	338	378	418	458	498	538		
40	+1.0 0					179	219	259	299	339	379	419	459	499	539	579	
45	+1.0 0						220	260	300	340	380	420	460	500	540	580	620
50	+1.0 0							261	301	341	381	421	461	501	541	581	621
55	+1.0 0								302	342	382	422	462	502	542	582	622
60	+1.0 0								303	343	383	423	463	503	543	583	623
65	+1.0 0										384	424	464	504	544	584	624

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers. - Continued

Nominal size		0.8	1	1.2	1.5	2	2.5	3	4	5	6	8	10	12	14	16	20
A Diameter	max	0.91	1.15	1.35	1.73	2.25	2.78	3.30	4.40	5.45	6.50	8.63	10.75	12.85	14.95	17.00	21.10
	min	0.85	1.05	1.25	1.62	2.13	2.65	3.15	4.20	5.20	6.25	8.30	10.35	12.40	14.45	16.45	20.45
B Chamfer diameter	max	0.75	0.95	1.15	1.40	1.90	2.40	2.90	3.90	4.85	5.85	7.80	9.75	11.70	13.60	15.60	19.60
C Chamfer length	ref	0.3	0.4	0.4	0.5	0.7	0.9	0.9	1.1	1.3	1.5	2.0	2.5	3.0	3.5	4.0	4.5
Recommended hole size	max	0.84	1.04	1.24	1.60	2.10	2.60	3.10	4.12	5.12	6.12	8.15	10.15	12.18	14.18	16.18	20.21
	min	0.80	1.00	1.20	1.50	2.00	2.50	3.00	4.00	5.00	6.00	8.00	10.00	12.00	14.00	16.00	20.00
Min double shear force (kN)		0.26	0.44	0.62	1.00	1.80	2.50	4.00	7.10	11.40	16.00	28.00	46.40	59.10	87.20	111.00	182.00

L - Length	Tol	Dash numbers															
70	+1.0 0										385	425	465	505	545	585	625
75	+1.5 0										386	426	466	506	546	586	626
80	+1.5 0											427	467	507	547	587	627
85	+1.5 0											428	468	508	548	588	628
90	+1.5 0											429	469	509	549	589	629
95	+1.5 0											430	470	510	550	590	630
100	+1.5 0											431	471	511	551	591	631
110	+1.5 0												472	512	552	592	632
120	+1.5 0												473	513	553	593	633
130	+1.5 0															594	634
140	+1.5 0															595	635
150	+1.5 0															596	636
160	+1.5 0															597	637

Custodians
Army - AR
Navy - OS
Air Force - 99

Review activities
Army - ER, MI
DLA-IS
NSA-NS

User activities
Army - AV, CE, ME
Navy - MC, YD

Preparing activity
Army - AR

Agent
DLA-IS

(Project 5315-0342)

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
DOD-P-63477/6 Pin, Spring, Tubular, Coiled, Standard Duty, CRES 302, Metric.

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?
[ ] YES [ ] NO *(If "Yes", in what way?)*

4 REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202610-23T02:58Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Armament Research and
Development Command
ATTN: DRDAR-TST-S
Dover, NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

METRIC
DOD-P-63477/6
NOTICE 1
14 April 1987

MILITARY SPECIFICATION SHEET

PIN, SPRING, TUBULAR, COILED, STANDARD DUTY, CRES 302, METRIC

DOD-P-63477/6, dated 29 May 1981, has been reviewed and determined to be valid for use in acquisition.

Custodians:
Army - AR
Navy - OS
Air Force - 99

Review activities:
Army - ER, MI
DLA-IS
NSA-NS

User activities:
Army - AV, CE, ME
Navy - MC, YD

Preparing activity:
Army - AR

AMSC N/A FSC 5315

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.