
MILITARY SPECIFICATION SHEET

Ⓕ CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES, PLUG, PIN CONTACTS, DECADE INCREMENTS 10 THRU 70 CONTACT POSITIONS AND INTERMEDIATE POSITIONS OF 14, 24, 44, 54 AND 26, 36, 56, 66 FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-55302.

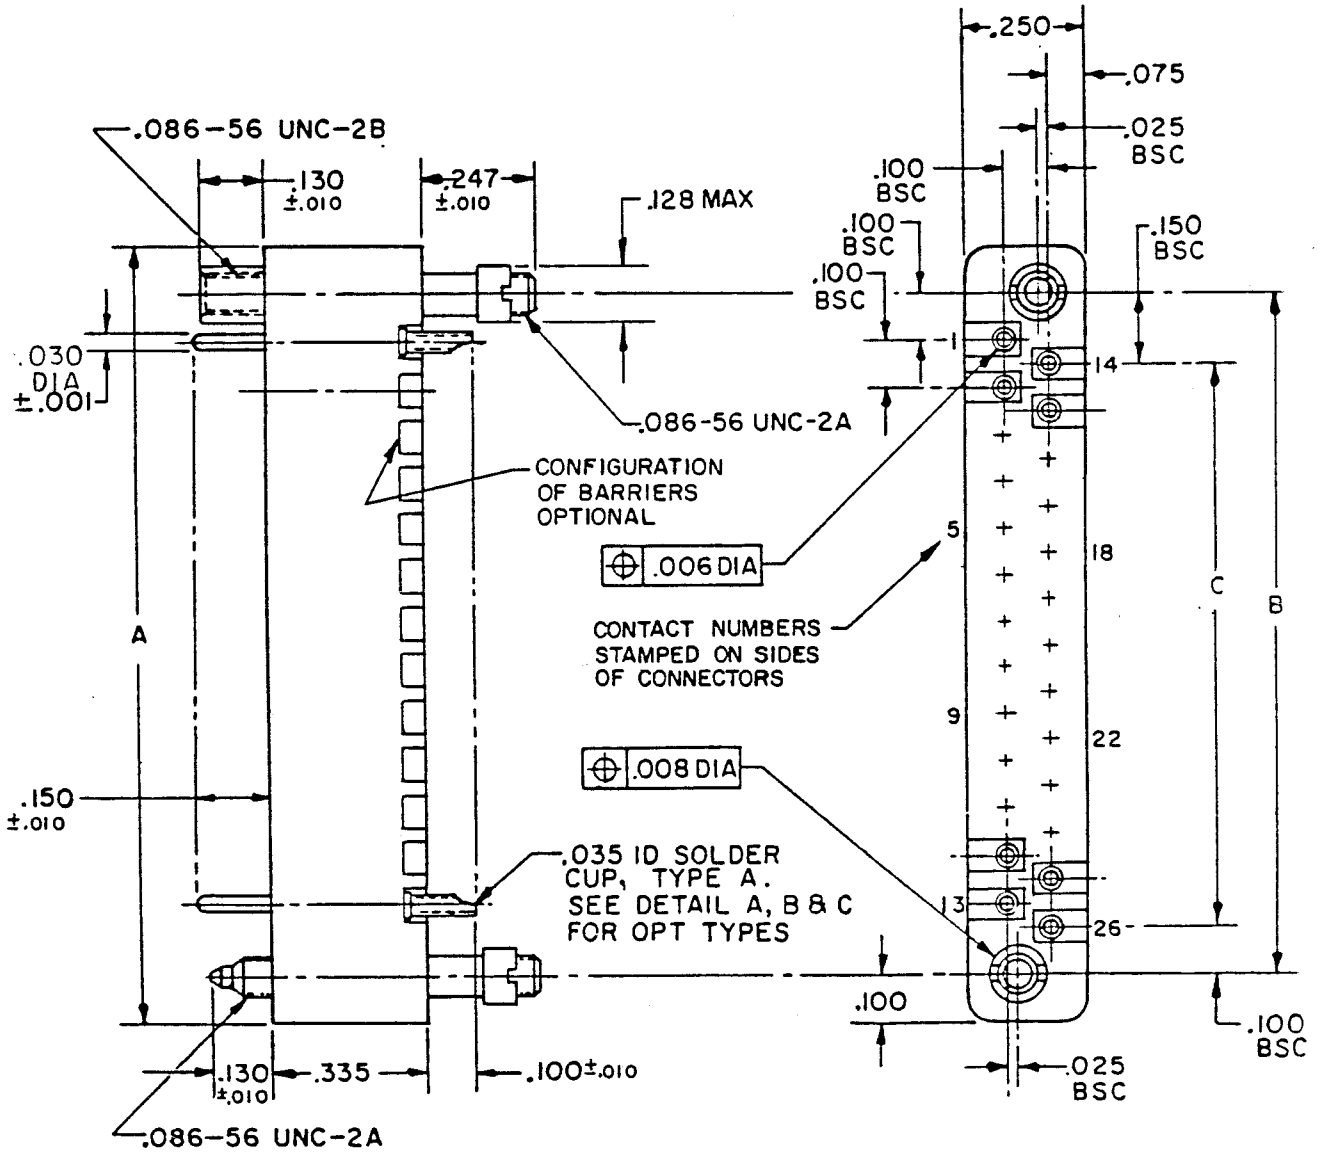


Ⓕ FIGURE 1. Connector, plug .100 (2.54 mm) spacing.


Ⓕ Denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.


Source: https://assist.dla.mil -- Downloaded: 202610-22T22:46Z
Check the source to verify that this is the current version before use.

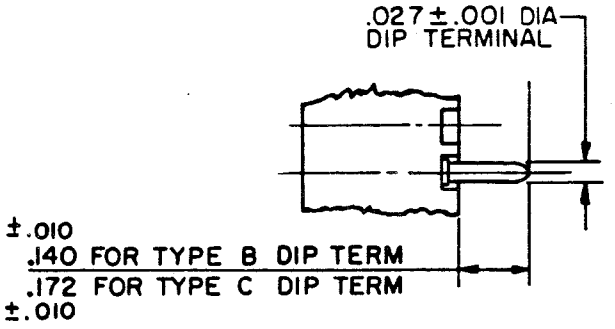

DETAIL A

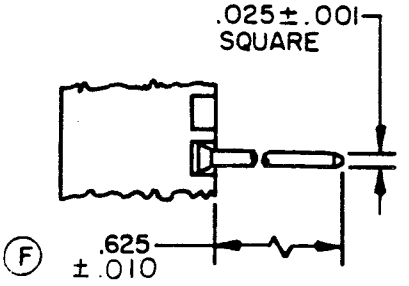

WIRE WRAP TERM (TYPE D)
DETAIL B

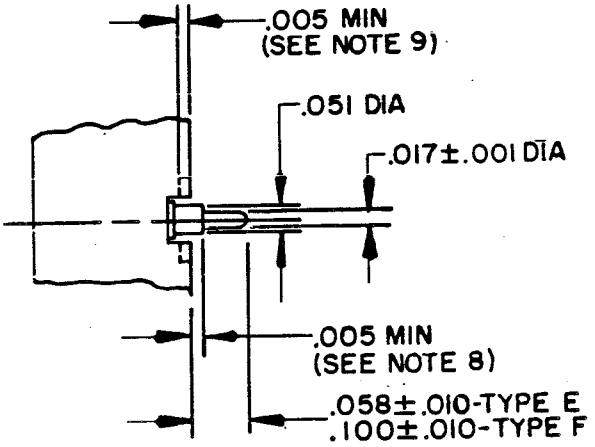

FLEXIBLE CIRCUIT TERMINAL

DETAIL C

Number of contacts	Dimensions		
	A ±.010	BSC B	REF C
10	.850 (21.59)	.650 (16.51)	.400 (10.16)
14	1.050 (26.67)	.850 (21.59)	.600 (15.24)
20	1.350 (34.29)	1.150 (29.21)	.900 (22.86)
24	1.550 (39.37)	1.350 (34.29)	1.100 (27.94)
26	1.650 (41.91)	1.450 (36.83)	1.200 (30.48)
30	1.850 (46.99)	1.650 (41.91)	1.400 (35.56)
36	2.150 (54.61)	1.950 (49.53)	1.700 (43.18)
40	2.350 (59.69)	2.150 (54.61)	1.900 (48.26)
44	2.550 (64.77)	2.350 (59.69)	2.100 (53.34)
50	2.850 (72.39)	2.650 (67.31)	2.400 (60.96)
54	3.050 (77.47)	2.850 (72.39)	2.600 (66.04)
56	3.150 (80.01)	2.950 (74.93)	2.700 (68.58)
60	3.350 (85.09)	3.150 (80.01)	2.900 (73.66)
66	3.650 (92.71)	3.450 (87.63)	3.200 (81.28)
70	3.850 (97.79)	3.650 (92.71)	3.400 (86.36)

(F) FIGURE 1. Connector, plug .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.001	0.03	.075	1.91
.005	0.13	.086	2.18
.006	0.15	.100	2.54
.008	0.20	.128	3.25
.010	0.25	.130	3.30
.017	0.48	.140	3 56
.025	0.64	.150	3.81
.027	0.69	.172	4.37
.030	0.76	.247	6.27
.035	0.89	.250	6.35
.051	1.30	.325	8.51
.058	1.47	.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.005 (0.13 mm).
4. These connectors mate with connectors specified in MIL-C-55302/55.
(F) 5. Numbers indicating the first and last position in each row and every fourth contact position in between shall be marked on the sides of the connector. As an option to the above, numbers indicating every fourth cavity may be stamped on the side of the connector, with the exception that the number 1 contact shall be marked.
6. Termination layout on .025 (0.64 mm) modular grid.
7. Metric equivalents are in parentheses.
8. Conformal coating clearances shall be .005 (0.13 mm) minimum (not required for optional design).
9. Optional design conformal coating clearance.

(F) FIGURE 1. Connector, plug .100 (2.54 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:46Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Ⓕ Material: Jackscrews and jacksockets shall be of corrosion resisting stainless steel in accordance with ASTM-A581 or ASTM-A582, passivated in accordance with QQ-P-35 or shall be corrosion resistant copper nickel alloy (61 ±2% copper, 25 ±2% nickel, 2.5% maximum other, and the balance zinc) and shall have a brinell hardness of 145 to 175.

Ⓕ Plating: The contact plating shall be in accordance with MIL-C-55302 or gold in accordance with MIL-G-45204, type II, grade C, class 1, over nickel plating in accordance with QQ-N-290, class 2, 50 to 150 microinches in the engaging area and gold in accordance with MIL-G-45204, type II, grade C, class 00, or type III, grade A, class 00, over nickel plating in accordance with QQ-N-290, class 02, 50 to 150 microinches in the termination area.

Contact identification: See figure 1.

Contact resistance: The average contact resistance of all contacts measured shall not exceed 0.010 ohm, and no individual contact pair shall have a resistance exceeding 0.020 ohm.

Dielectric withstanding voltage:

Sea level: 1,000 volts rms.
High altitude: 300 volts rms.

Current rating: 5.0 amperes maximum per contact.

Example of part number:

Ⓕ

M55302/56	A	10
Basic number of specification sheet	Type of terminal (see figure 1)	Number of contacts (see figure 1)

A = solder cup
B = dip terminal .140 long
C = dip terminal .172 long
D = wire wrap
E = flexible circuit terminal .058
F = flexible circuit terminal .100

Custodians:
Army - CR
Navy - EC
Air Force - 17

Ⓕ Review activities:
Army - AR, MI
Navy - AS, TD
Air Force - 85, 99
DLA - ES

Ⓕ User activities:
Army - AT, AV, ME
Navy - MC, OS
Air Force - 11, 19, 80

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3592-2)

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:46Z
Check the source to verify that this is the current version before use.