NOTICE OF REINSTATEMENT

INCH-POUND

MIL-F-82240D
NOTICE 2
11 September 1997
SUPERSEDING
NOTICE 1
21 March 1996

MILITARY SPECIFICATION

FOOTWEAR COVER, RADIOACTIVE CONTAMINANTS PROTECTIVE

MIL-F-82240D, dated January 21, 1985, is hereby reinstated. Users are cautioned to evaluate the Military specification for their particular application before citing it as a replacement document.

(Copies of referenced federal and military documents are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5099.)

Custodians:
Navy - NU
Air Force - 99

Preparing Activity:
DLA - CT

Reviewer Activity:
Navy - SH, MS
Air Force - 82

Project No.: 8430-0447

AMSC N/A **FSC 8430**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

INCH-POUND
MIL-F-82240D
21 January 1985
SUPERSEDING
MIL-F-82240C

MILITARY SPECIFICATION

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS PROTECTIVE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. Scope. This specification covers the requirements for one type and size of protective footwear cover fabricated from flexible vinyl chloride plastic film (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-375	- Plastic Film, Flexible, Vinyl Chloride
PPP-B-636	- Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions, clarifications) and any pertinent data which may be of use in improving this document should be addressed to: Defense Personnel Support Center, Clothing and Textiles Directorate, Attn: DPSC-FNS, 2800 South 20th Street, Philadelphia, PA 19145-5099 by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter..

AMSC N/A **FSC 8430**

DISTRIBUTION STATEMENT A. ***Approved for public release; distribution is unlimited.***

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-595 - Color

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for shipment and storage
MIL-STD-147 - Palletized Unit Loads

(Copies of specifications, standards, drawings and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer).

* 2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

US POSTAL SERVICE MANUAL

(Copies of the manual may be obtained from the Superintendent of Documents, US Government Printing Office, Washington, DC 20402).

2.2 Other publications. The followings documents(s) form a part of this specification to the extent herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and supplement thereto, if applicable.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Applications for copies should be addressed to the American Trucking Association, ATTN: Traffic Department, 1616 P Street, N.W., Washington, DC 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

* 2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variations from this specification may appear in the sample in which case this specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Material.

3.3.1 Basic material. The basic material shall be plastic film, flexible, vinyl chloride and shall conform to type I, class 2 of L-P-375, 0.004 (± 0.001,-0.004) inch thick, except that the requirements for extraction in soapy water, volatility, resistance to weathering, cold crack, lacquer lifting, crocking and dimensional stability shall not apply. The color of the film shall approximate Color No. 13655 (Yellow) of FED-STD-595.

3.4 Description. The covers shall consist of two profile sections of vinyl plastic electronically heat sealed together at the sides and bottom (see fig. 1).

3.4.1 Figure. The figure is furnished for information purposes only. To the extent of any inconsistencies between the specification and the figure, the specification shall govern.

3.5 Pattern. A standard profile pattern will be furnished by the government to the Contractor for use in making heat sealing dies. The working pattern shall be identical to the Government pattern. Neither the Government pattern nor the working pattern shall be altered in any way.

3.5.1 Heat sealing dies. The contractor shall furnish all electric heat sealed dies required to manufacture the covers. The dies shall heat-seal and heat-cut the covers to size and shape required by the standard patterns.

3.6 Construction. The covers shall be manufactured by heat sealing two profile sections and die cutting to the proper size and shape. The heat seal shall be continuous along its entire length. The width of the fused zone shall be 5/64 to 7/64 inches along the sides and bottom except at the top opening of the cover where the width of reinforcing fuse zone shall be 1/8 to 1/4 inch for a distance 3/4 to 1 inch.

* 3.7 Finished dimensions. The finished dimensions of the covers shall be as listed below for A, B, C, and D which refer to Figure 1. Measurements are expressed in inches and shall be taken with the cover laid flat.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

		Inches
A	Length of foot	15-3/8 to 15-5/8
B	Width of top opening	10-3/8 to 10-5/8
C	Center height	17-7/8 to 18-1/8
D	Choke width 1/	10-3/8 to 10-5/8

1/ Taken 10 inches from the bottom edge.

3.8 Workmanship. The finished covers shall conform to the quality of product established by the specification. The occurrence of defects shall be not exceed the acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use their own or any other facilities unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required, the first article submitted in accordance with 3.2 and 6.2 shall be visually inspected as specified in 4.4.2 for compliance with design, construction, workmanship, and dimensional requirements.

4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and material shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

4.4.2. Examination of the end item. Examination of the end item shall be in accordance with 4.4.2.1 through 4.4.2.4. The applicable inspection levels and acceptable quality levels (AQL's)shall be as indicated in 4.4.2.3. The sample unit shall be one completely fabricated cover. The lot size shall be expressed in units of covers.

* 4.4.2.1 Visual examination. The covers shall be examined for defects classified in accordance with the list below.

Examine	Defect
Material Defects and Workmanship	Not material specified. Not color specified. Not uniform in color. Not smooth finish i.e., any cover having surface finish defect of the following: crazing, cracking, blistering, pitting, bubbling and permanent wrinkling. Any hole, cut, tear, rupture, burn, or thin spots. Any repair patches or mend. Excess material adjacent to fuse zone not trimmed. Any imbedded foreign matter. Any open seam. Any inadequate heat seal, i.e., seam can be easily pulled apart with moderate hand pressure. Seam excessively puckered. Any unspecified seam (fused zones). Width of fused zone (side and bottom seam) less than 5/64 inch or more than 7/64 inch. Omitted reinforcing fused zone. Width of reinforcing fused zone (top openings) less than 1/8 inch or more than 1/4 inch. Length of reinforcing fused zone (top openings) less than 3/4 inch or more than 1 inch. Height, at top opening, uneven (feathered) by more than 1/4 inch.
Cleanness	Any permanent spot or stain.
Cutting	Any part not cut in accordance with pattern or specification requirements.

4.4.2.2 Dimensional examination. The covers shall be examined for dimensional defects. Any measurement deviating from the dimensions and tolerances specified in 3.7 shall be scored as a defect.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed as defects per 100 units, for visual and dimensional examinations shall be as follows:

	Inspection levels	AQL
For defects applicable to 4.4.2.1	II	4.0
For defects applicable to 4.4.2.2	S-3	4.0

4.4.3 Examination of packaging requirements. An examination shall made to determine that packaging, packing and marking comply with Section 5 requirements of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure list below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per one hundred units.

Examine	Defect
Marking (exterior) and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Workmanship	Inadequate application stapling, incorrect application of tape.
Content	Number of bundles per container more or less than specified. Number of covers per bundle more or less than specified. 1/

1/ For this defect only two bundles per container shall be examined.

* 4.4.4 Palletization examination. An examination shall be made to determine that the palletization complies with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one palletized unit load fully packaged. The lot size shall be the number of palletized unit loads in the end item inspection lot. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defects
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Loads not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted, incorrect, illegible, of improper size location, sequence, or method of application.

5. PACKAGING

5.1 Preservation-packaging. Packaging shall be level A or C as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

5.1.1 Level A. Twenty-four covers with the toes facing the same direction shall be laid out flat and neatly stacked one on top of another. The toe portion of the covers shall be folded together toward the heel to form a stack whose dimensions approximate 17 inches in length by 10 inches in width. Two hundred-forty covers (240 covers) (10 stacks) with each stack alternately reversed, shall be placed flat in a fiberboard box conforming to style RSC, type CF, variety SW, class domestic, grade 125 of PPP-B-636 and shall be closed in accordance with the box specification. As a guide, the inside dimensions of each box shall approximate 18 inches in length, 10-1/2 inches in width and 3 inches in depth.

5.1.2 Level C. Covers shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The package and the quantity per package shall be the same as that normally used by the contractor for retail distribution.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A. Seven hundred twenty (720) covers (3 boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class weather resistant, variety DW, style RSC, grade V15C of PPP-B-636. Level A packages shall be packed flat, three in depth within the container. As a guide, the inside dimension of each box shall approximate 18-1/2 inches in length, 11 inches in width, and 10 inches in depth. Each container shall be closed, waterproofed, and reinforced in accordance with the appendix of PPP-B-636.

5.2.2 Level B. Seven hundred twenty (720) covers (3 boxes), packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, style RSC, grade 200 of PPP-B-636. Level A packages shall be packed flat, three in depth within the container. As a guide, the inside dimension of each box shall approximate 18-1/2 inches in length, 11 inches in width and 10 inches in depth. Each container shall be closed in accordance with the appendix of the box specification.

5.2.3 Level C. Covers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules as applicable.

5.3 Palletization. When specified (see 6.2), covers, packed as specified in 5.2, shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with the bonding means K and L or bonding means 0. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, The pallet pattern used shall first be approved by the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

5.4 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Footwear covers covered by this specification are intended for the protection of military personnel working in the presence of low level radioactive material.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. When first article inspection is required, the item will be tested and should include specific instructions in acquisition documents regarding arrangement for examinations, quantity, and testing and approval.
c. Level of packaging and packing required (see 5.1 and 5.2).
d. When palletization is required (see 5.3).

6.3 Samples and pattern. For access to samples and patterns, address the procuring activity issuing the invitation for bids.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU
Air Force - 99

Preparing Activity:
Navy - NU

Review Activity:
Navy - MS, SH,
DLA - CT
Air Force - 82

Project No. 8430-0342

User Activities:
Navy - AS, CG, OS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

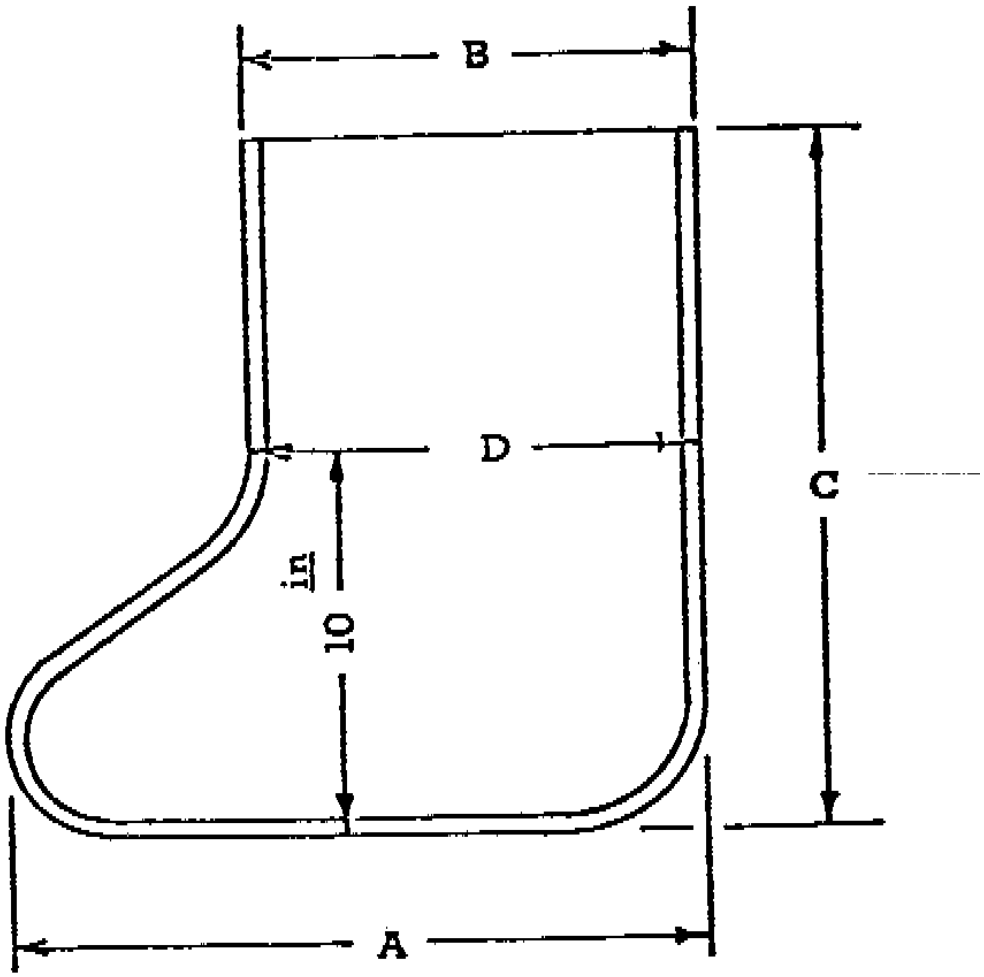

FIGURE 1

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS, PROTECTIVE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE *(YYMMDD)*
	MIL-F-82240D	85-01-21

3. DOCUMENT TITLE

FOOTWEAR, COVER, RADIOACTIVE CONTAMINANTS PROTECTIVE

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME *(Last, First, Middle Initial)*	b. ORGANIZATION	
c. ADDRESS *(Include Zip Code)*	d. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON *(If applicable)*	7. DATE SUBMITTED *(YYMMDD)*

8. PREPARING ACTIVITY

a. NAME DEFENSE PERSONNEL SUPPORT CENTER DPSC-FNS	b. TELEPHONE *(Include Area Code)* (1) Commercial (2) AUTOVON (215) 737-8079 444-8079
c. ADDRESS *(Include Zip Code)* 2800 South 20th STREET PHILADELPHIA, PA 19145-5099	**IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT:** Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:55Z
Check the source to verify that this is the current version before use.