MIL-G-82248D
Amendment-1
6 February 1986

MILITARY SPECIFICATION

GLOVES, HEAT PROTECTIVE (TERRY KNIT)

This amendment forms a part of Military Specification MIL-G-82248D, dated 4 September 1985, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 1

1.1 line 2, following "gloves" delete "." Add "made from FRT Cotton or PFR Rayon.".

1.2 line 1, following "size", add "." and delete remainder of the paragraph.

Page 2

2.1.1 CCC-C-443, line 1 following "Duck" delete "Cloth" and substitute "Cotton".

Page 3

3.3.1 line 2, delete "natural" and substitute "PFR"

line 3, Add the following sentence after "yarn":

The flame resistant rayon is manufactured by metering water-insoluble (poly n-propoxyphosphazene) into viscose solution from which rayon fibers are spun. The fibers contain the flame retardant highly dispersed in a matrix of cellulose.

line 3, delete "Both materials" and substitute "The cotton material".

line 8, delete "(see 6.2)" and substitute "(6.5 and 6.6)".

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

Delete Table I in its entirety and substitute the following:

Table I - Physical properties of treated terry

Characteristics	Requirements
Weight, oz per sq yd	27 to 30
Wales per inch	8 (Min)
Courses per inch	13 (Min)
Thickness, inch	
- 0.1 lbs per sq inch pressure	0.120 (Min)
- 1.1 lbs per sq inch pressure	0.110 (Min)
Bursting strength, lbs	60.0 (Min)
Flame resistance, flame time, seconds	
Wale direction	
- Initial	2.0 (Max)
- After three launderings	2.0 (Max)
Course direction	
- Initial	2.0 (Max)
- After three launderings	2.0 (Max)
After Glow, seconds	
Wale direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Course direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Char length, inch	
Wale direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Course direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)

3.3.2 line 7, delete "(6.2)" and substitute "(6.5 and 6.6)"

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

Delete Table II in its entirety and substitute the following:

Table II - Physical properties of treated cotton duck

Characteristics	Requirements
Flame resistance, flame time, seconds	
Warp direction	
- Initial	2.0 (Max)
- After three launderings	2.0 (Max)
Filling direction	
- Initial	2.0 (Max)
- After three launderings	2.0 (Max)
After glow, seconds	
Warp direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Filling	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Char length, inches	
Warp direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)
Filling direction	
- Initial	5.0 (Max)
- After three launderings	5.0 (Max)

Page 12

Table V - Under component column add "FR" before "terry".

Under Characteristics, Requirement Paragraph and Test Method add the following:

After glow		
Wale direction:		
- Initial	Table I	5903
- After three launderings	Table I	5556 4/ 5903
Filling direction:		
- Initial	Table I	5903
- After three launderings	Table I	5556 4/ 5903

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

Page 13

Table V - Under component column add "FRT" before cotton.

Under Characteristics, Requirement paragraph and Test Method add the following:

After glow		
Warp direction:		
- Initial	Table II	5903
- After three launderings	Table II	5556 4/ 5903
Filling direction:		
- Initial	Table II	5903
- After three launderings	Table II	5556 4/ 5903

Page 19

6.2 Delete "c". in its entirety

Add the following:

6.5 Only those treatments listed in the invitation for bids or request for proposal shall be considered acceptable for related procurement. Information on currently approved material may be obtained from Defense Personnel Support Center, Philadelphia, PA 19101 (see 3.3.1 and 3.3.2).

6.6 A cotton fire retardant treatment (FRT) with a precondensate of a tetrakishydroxymethyl phosphonium salt cured in a gaseous ammonia atmosphere (precondensate/ammonia cure) has been found to meet the specification requirements (see 3.3.1 and 3.3.2).

Page 20

Add the following page:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

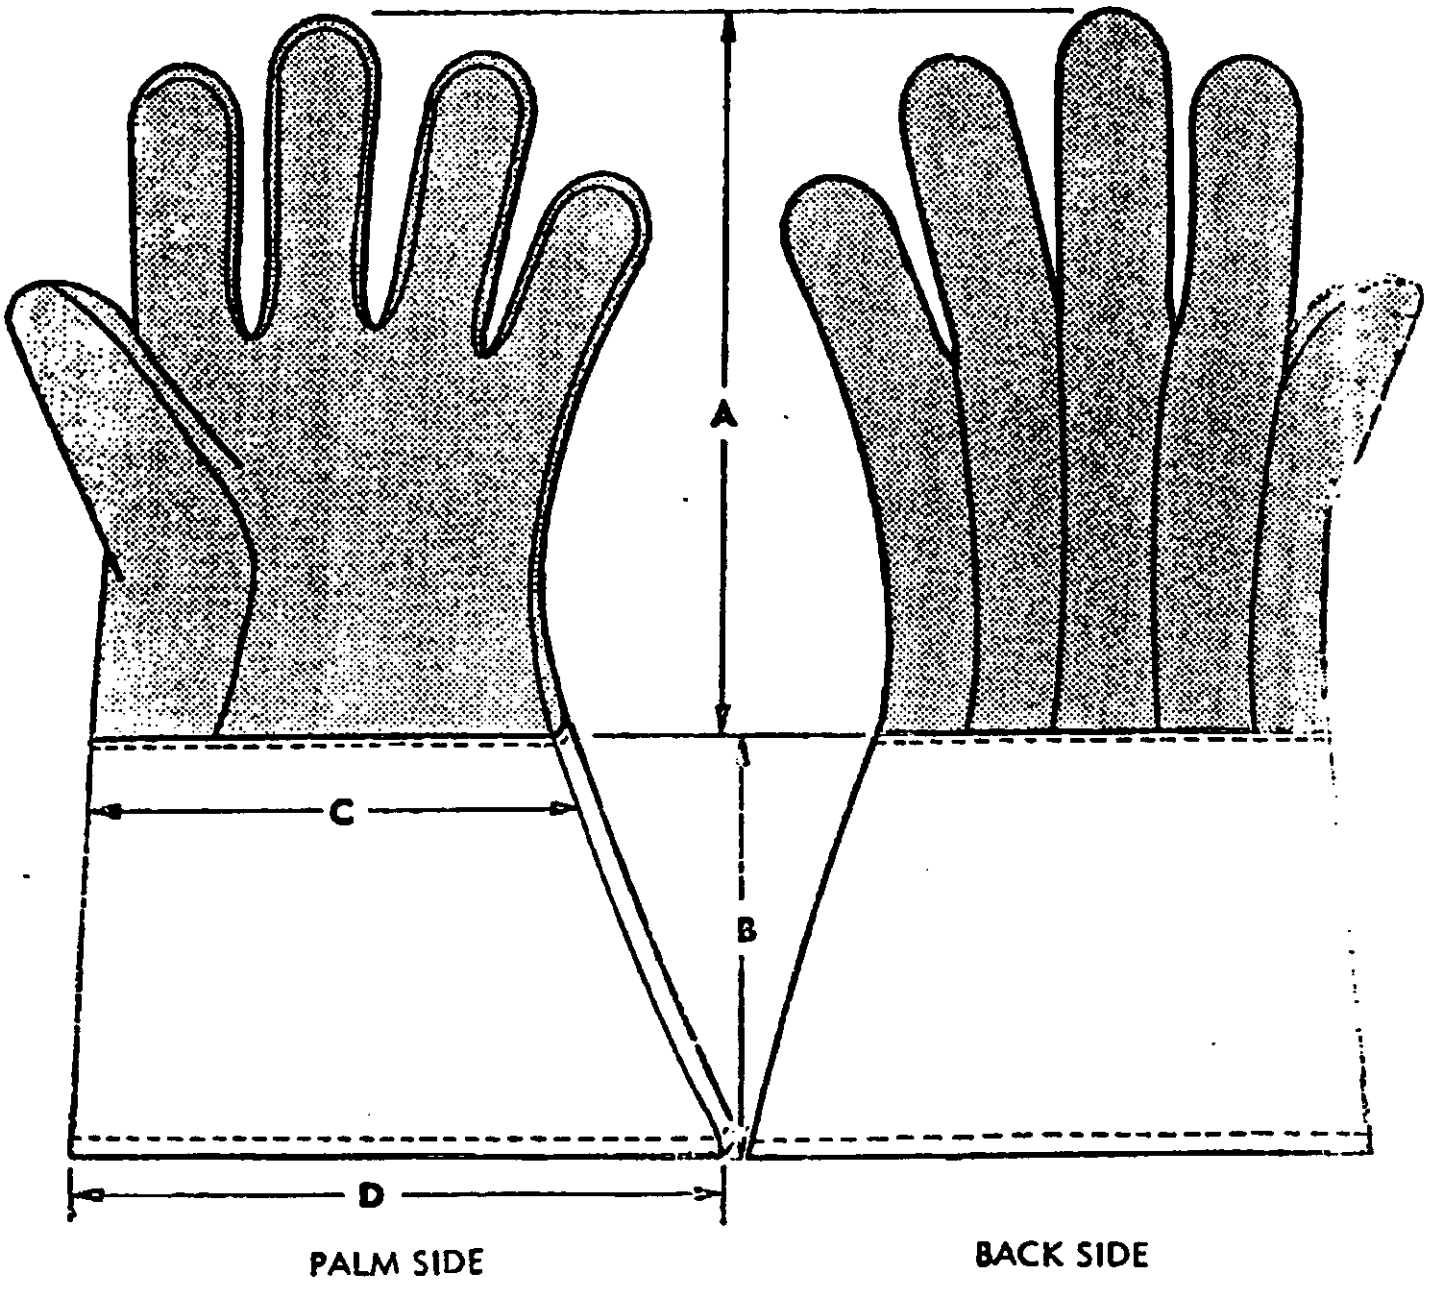


FIGURE 1 - GLOVES, HEAT PROTECTIVE (TERRY KNIT)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.

Custodian:
Navy - NU

Review Activity:
DLA-CT

User Activity:
Navy - OS

Preparing activity:
Navy - NU

Project No: 8415-N503

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:57Z
Check the source to verify that this is the current version before use.