

MILITARY SPECIFICATION SHEET

Capacitors, Ceramic, Multilayer, High Voltage, 1000 V DC, Established Reliability, Style HVR01

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-C-49467.

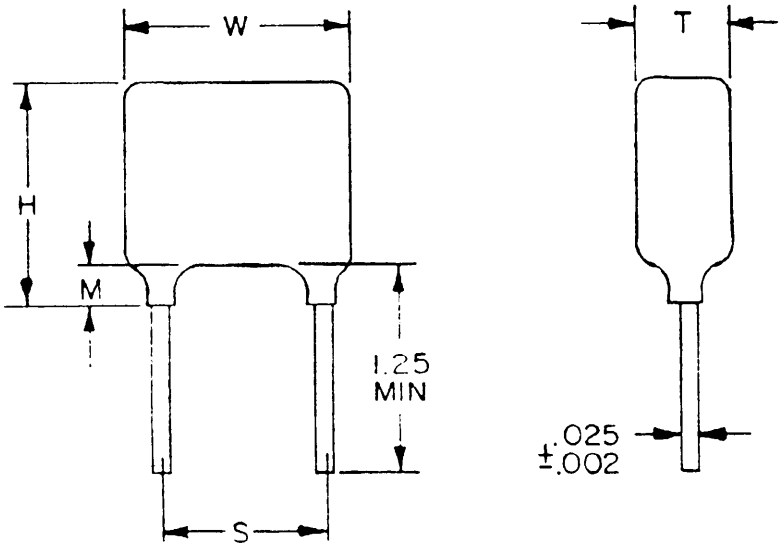



Case code	Dimensions				
	W max	H max	T max	M max	S ±.030
A	.250	.220	.200	.045	.170
B	.320	.280	.250	.045	.220
C	.370	.300	.250	.045	.275
D	.470	.400	.270	.060	.375
E	.570	.500	.270	.060	.475
F	.670	.600	.270	.060	.575
G	.770	.720	.270	.060	.675

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.

Inches	mm	Inches	mm
.002	.05	.370	9.40
.025	.64	.375	9.52
.030	.76	.400	10.16
.045	1.14	.470	11.94
.060	1.52	.475	12.06
.170	4.32	.500	12.70
.200	5.08	.570	14.48
.220	5.59	.575	14.60
.250	6.35	.600	15.24
.270	6.86	.670	17.02
.275	6.98	.675	17.14
.280	7.11	.720	18.29
.300	7.62	.770	19.56
.320	8.13	1.250	31.75

FIGURE 1. Capacitor style HVR01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case type: Conformally coated, molded, or encapsulated.

Lead material: In accordance with MIL-STD-1276.

Capacitance value: See table I.

Capacitance tolerance: J = ±5%, K = ±10%, M = ±20%. See table I.

Operating temperature range: -55°C to +125°C.

Voltage rating: 1000 V dc.

Failure rate level: M (1.0%), P (0.1%), R (.01%), or S (.001%).

Dielectric types: BP, BR, and BZ in accordance with MIL-C-49467.

Temperature coefficient: 0 ±30 ppm/°C (BP), ±15% (BR, BZ).

Voltage-temperature limits: In accordance with MIL-C-49467.

Symbol	Capacitance change with reference to +25°C	
	Steps A through D of voltage-temperature limit cycle table of MIL-C-49467. Bias = 0 volt.	Steps E through G of voltage-temperature limit cycle table of MIL-C-49467.
BP	0 ±30 ppm/°C	100% rated voltage: 0 ±30 ppm/°C
BR	±15%	100% rated voltage: +15, -40% 40% rated voltage: +15, -25% 60% rated voltage: +15, -40%
BZ	±15%	

Dissipation factor (25°C): 2.5% maximum (BR and BZ characteristics) or 0.1% maximum (BP characteristic), measured under the same conditions as capacitance.

Resistance to soldering heat: ΔC: -1% to +2% for BP characteristic.
-1% to +6% for BR and BZ characteristics.

Marking: In accordance with MIL-C-49467.

APPLICATION NOTES:

Additional encapsulation is necessary in applications where the possibility of a voltage breakdown between the leads of the capacitor, or the capacitor to another potential, could occur.

Heat sinks on each lead or adequate preheating is required when these capacitors are installed in or removed from circuits by soldering iron.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

TABLE 1. Capacitor characteristics.

PIN 1/	Capacitance	Capacitance tolerance	Characteristic	Case code
M49467P01100__	10 pF	J, K	BP	A
M49467P01120__	12	J, K	BP	A
M49467P01150__	15	J, K	BP	A
M49467P01180__	18	J, K	BP	A
M49467P01220__	22	J, K	BP	A
M49467P01270__	27	J, K	BP	A
M49467P01330__	33	J, K	BP	A
M49467P01390__	39	J, K	BP	A
M49467P01470__	47	J, K	BP	A
M49467P01560__	56	J, K	BP	A
M49467P01680__	68	J, K	BP	A
M49467P01820__	82	J, K	BP	A
M49467P01101__	100	J, K	BP	A
M49467_01101__	100	K, M	BR, BZ	A
M49467P01121__	120	J, K	BP	A
M49467_01121__	120	K, M	BR, BZ	A
M49467P01151__	150	J, K	BP	A
M49467_01151__	150	K, M	BR, BZ	A
M49467P01181__	180	J, K	BP	A
M49467_01181__	180	K, M	BR, BZ	A
M49467P01221__	220	J, K	BP	A
M49467_01221__	220	K, M	BR, BZ	A
M49467P01271__	270	J, K	BP	A
M49467_01271__	270	K, M	BR, BZ	A
M49467P01331__	330	J, K	BP	A
M49467_01331__	330	K, M	BR, BZ	A
M49467P01391__	390	J, K	BP	A
M49467_01391__	390	K, M	BR, BZ	A
M49467P01471__	470	J, K	BP	A
M49467_01471__	470	K, M	BR, BZ	A
M49467P01561__	560	J, K	BP	A
M49467_01561__	560	K, M	BR, BZ	A
M49467P01681__	680	J, K	BP	A
M49467_01681__	680	K, M	BR, BZ	A
M49467P01821__	820	J, K	BP	B
M49467_01821__	820	K, M	BR, BZ	A
M49467P01102__	1000	J, K	BP	B
M49467_01102__	1000	K, M	BR, BZ	A
M49467P01122__	1200	J, K	BP	B
M49467_01122__	1200	K, M	BR, BZ	A
M49467P01152__	1500	J, K	BP	B
M49467_01152__	1500	K, M	BR, BZ	A
M49467P01182__	1800	J, K	BP	B
M49467_01182__	1800	K, M	BR, BZ	A
M49467P01222__	2200	J, K	BP	C
M49467_01222__	2200	K, M	BR, BZ	A
M49467P01272__	2700	J, K	BP	C
M49467_01272__	2700	K, M	BR, BZ	A
M49467P01332__	3300	J, K	BP	C
M49467_01332__	3300	K, M	BR, BZ	A
M49467P01392__	3900	J, K	BP	C
M49467_01392__	3900	K, M	BR, BZ	A

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics - Continued.

PIN 1/	Capacitance	Capacitance tolerance	Characteristic	Case code
M49467P01472__	4700 pF	J, K	BP	D
M49467_01472__	4700	K, M	BR, BZ	A
M49467P01562__	5600	J, K	BP	E
M49467R01562__	5600	K, M	BR	B
M49467Z01562__	5600	K, M	BZ	A
M49467P01682__	6800	J, K	BP	E
M49467R01682__	6800	K, M	BR	B
M49467Z01682__	6800	K, M	BZ	A
M49467P01822__	8200	J, K	BP	E
M49467R01822__	8200	K, M	BR	B
M49467Z01822__	8200	K, M	BZ	A
M49467P01103__	.01 µF	J, K	BP	E
M49467R01103__	.01	K, M	BR	B
M49467Z01103__	.01	K, M	BZ	A
M49467P01123__	.012	J, K	BP	F
M49467R01123__	.012	K, M	BR	C
M49467Z01123__	.012	K, M	BZ	B
M49467P01153__	.015	J, K	BP	F
M49467R01153__	.015	K, M	BR	C
M49467Z01153__	.015	K, M	BZ	B
M49467P01183__	.018	J, K	BP	G
M49467R01183__	.018	K, M	BR	D
M49467Z01183__	.018	K, M	BZ	C
M49467P01223__	.022	J, K	BP	G
M49467R01223__	.022	K, M	BR	D
M49467Z01223__	.022	K, M	BZ	C
M49467P01273__	.027	J, K	BP	G
M49467_01273__	.027	K, M	BR, BZ	D
M49467_01333__	.033	K, M	BR, BZ	D
M49467_01393__	.039	K, M	BR, BZ	D
M49467R01473__	.047	K, M	BR	E
M49467Z01473__	.047	K, M	BZ	D
M49467R01563__	.056	K, M	BR	E
M49467Z01563__	.056	K, M	BZ	D
M49467_01683__	.068	K, M	BR, BZ	E
M49467_01823__	.082	K, M	BR, BZ	E
M49467_01104__	.10	K, M	BR, BZ	E
M49467R01124__	.12	K, M	BR	F
M49467Z01124__	.12	K, M	BZ	E
M49467_01154__	.15	K, M	BR, BZ	F
M49467R01184__	.18	K, M	BR	G
M49467Z01184__	.18	K, M	BZ	F
M49467_01224__	.22	K, M	BR, BZ	G
M49467_01274__	.27	K, M	BR, BZ	G
M49467_01334__	.33	K, M	BR, BZ	[illegible]
M49467_01394__	.39	K, M	BR, BZ	[illegible]
M49467_01474__	.47	K, M	BR, BZ	G

1/ The complete PIN shall include additional letter symbols to indicate the characteristic, where applicable, the capacitance tolerance, and the failure rate level.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.

Closure and stabbing shall be in accordance

CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - MI
Air Force - 11, 19
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1615)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:10Z
Check the source to verify that this is the current version before use.