|INCH-POUND|
MIL-R-81553A(AS)
AMENDMENT 2
16 July 1990
SUPERSEDING
AMENDMENT 1
12 August 1987

MILITARY SPECIFICATION

REGULATOR, CHEST MOUNTED, 100 PERCENT OXYGEN, POSITIVE PRESSURE, CRU-79/P

This amendment forms a part of MIL-R-81553A(AS), dated 30 August 1983, and is approved for use within the Department of the Navy and is available for use by all Departments and Agencies of the Departmentof Defense.

PAGE 1

*2.1.1, delete and substitute:

"2.1.1 Specifications, standards and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issue of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2.1)."

PAGE 2

Under STANDARDS, MILITARY, delete: "MIL-STD-143 Standards and Specifications, Order of Precedence, For the Selection of" and add: "MIL-STD-970 Standards and Specifications, Order of Preference For the Selection Of"

PAGE 3

*2.1.2:

a. Delete and substitute the following:

"2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation."

b. Delete parenthetical source statement and add new:

"(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Standardization Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)"

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:41Z
Check the source to verify that this is the current version before use.

*2.2, delete and substitute:

"2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2.1)

AMERICAN SOCIETY FOR TESTING MATERIALS (ASTM)

ASTM D 1149-78A	Rubber Deterioration - Surface Ozone Cracking in a Chamber (Flat Specimen)

(Application for copies should be addressed to: ASTM, 1916 Race St, Philadelphia, PA 19103).

(Non-Government standards and other publications are normally available form the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)"

*2.3, add the following at the end of the paragraph:

"Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained."

PAGE 4

*3.3, line 3: Delete "MIL-STD-143" and substitute "MIL-STD-970."

*3.4, add the following at the end of the paragraph: "Materials that produce toxic or corrosive substances shall not be used."

*3.6, add the following at the end of the paragraph: "The regulator shall be designed so that the aneroid can be adjusted."

PAGE 7

*4.1.1, add the following new paragraph:

"4.1.1 Responsibility for compliance. All items must meet all requirements of Section 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:41Z
Check the source to verify that this is the current version before use.

PAGE 9

4.6.1, delete list and substitute the following:

a. Visual examination
b. Overload
c. Leakage
d. Outlet pressures

PAGE 10

4.7.5, third sentence: Delete and substitute "The piezometer shall be connected to the mask end of the regulator as shown in Figure 4.

PAGE 11

4.7.7.1, delete and substitute:

"4.7.7.1 Test Equipment. For qualification and quality conformance inspections, all flow and pressure tests should be performed on test stand models 62A-116-E1, 1172AS100, or 1316AS100. Regulators when tested on other stands, shall be capable of fulfilling all flow and pressure test requirements of this specification when tested on test stand models 62A-116-E1, 1172AS100 or 1316AS100."

PAGE 12

4.8.2.2, delete and substitute:

"4.8.2.2 Outlet pressure - quality conformance and quality conformance inspections. Quality conformance and quality conformance inspections shall be performed in accordance with Table 1 except that the test shall be conducted using ambient air flows of 0, 50, and 100 lpm with inlet pressures of 50 and 120 psig at altitudes of ground level, 10,000, and 30,000 feet. In the pressure breathing range, tests shall be conducted utilizing ambient flows of 0 and 100 lpm with inlet pressures of 40 and 120 psig at altitudes of 34,000, 40,000, 45,000 and 50,000 feet."

4.8.4.1.1, add to the end of the paragraph: "The designed bleed flow rate shall not exceed 900 ccm with a pressure of 25 in. H_2O applied."

PAGE 16

*6.2.1, under sub-element "b", add:

"b-1. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2)."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:41Z
Check the source to verify that this is the current version before use.

PAGE 18

Table I, delete and substitute:

TABLE I Outlet pressures.

Altitude (feet)	Inlet supply pressure (psig)	Outlet pressure @ 0.0 lpm flow (in. H_2O)	Outlet pressure @ 50.0 lpm flow (in. H_2O)	Outlet pressure @ 100.0 lpm flow (in. H_2O)
Ground level	40, 80, 120	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5
10,000	40, 80, 120	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5
30,000	40, 80, 120	0.5 to 2.5	0.5 to 2.5	0.5 to 2.5
34,000	40, 80, 120	1.0 to 3.7	1.0 to 3.7	1.0 to 3.7
40,000	40, 80, 120	8.0 to 10.5	8.0 to 10.5	8.0 to 10.5
45,000	40, 80, 120	13.0 to 16.0	13.0 to 16.0	13.0 to 16.0
50,000	40, 80, 120	16.0 to 20.0	16.0 to 20.0	16.0 to 20.0

PAGE 23

Under "NOTES", delete steps 1 and 2 and substitute:

"1. REGULATOR SHALL MATE WITH A 1/8-27 ANPT INLET FITTING FOR 40-120 PSIG OXYGEN.

2. ANPT SHALL BE IN ACCORDANCE WITH MIL-P-7105."

NOTE: The margins of this amendment are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:41Z
Check the source to verify that this is the current version before use.

PAGE 23

Add Figure 4:

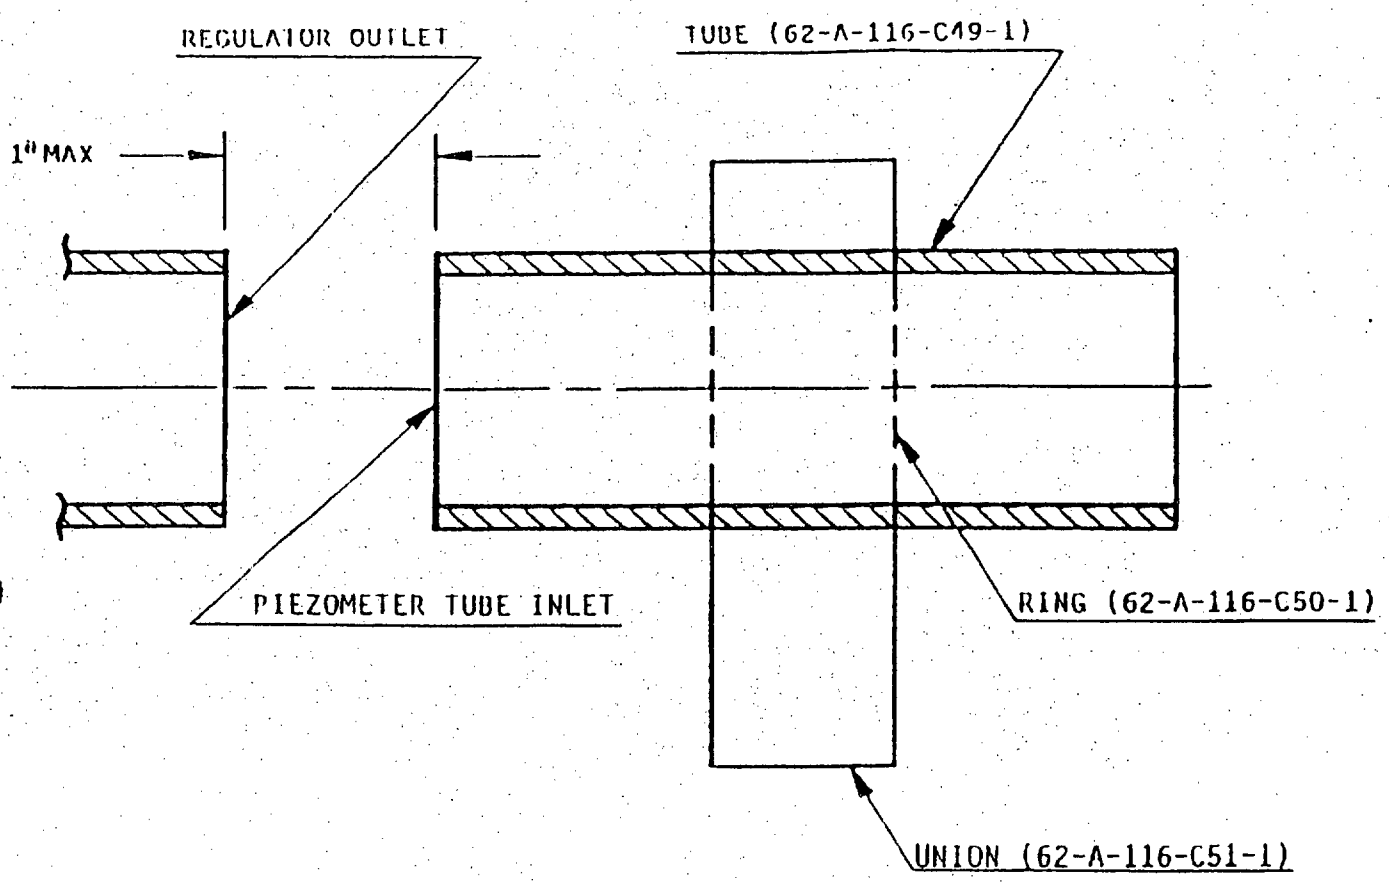


Figure 4. Location of regulator outlet of piezometer (62-A-116-C48).

Preparing Activity
NAVY AS
(Project 1660-N600)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T05:41Z
Check the source to verify that this is the current version before use.