MILITARY SPECIFICATION SHEET

VALVE, STARTER CONTROL
AIRCRAFT ENGINE, FOR TF30 ENGINE

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the starter control valve described herein shall consist of this document and the latest issue of Specification MIL-V-81995.

REQUIREMENTS:

Envelope: See Figure 1.

weight: 8.0 lb maximum

Aircraft Model: F-14

Engine Model: TF30

Operating Inlet Air Conditions:

Rated Pressure: 256 psia

Rated Temperature: 823°F (440°C)

Maximum Pressure: 280 psia

Maximum Temperature: 1020°F (550°C)

Maximum Engine Interbleed Pressure: 256 psia

Minimum Pressure: 16 psig

Regulating Pressure: 37.0 + 2.5 psig at inlet pressures from 39 psig to 241 psig at airflows from 50 lb/rein to 200 lb/rein.

Flow: The flow rate for all test conditions shall be limited by fixed orifice or nozzle which will produce an airflow of 100 ± 10 lb/rein at orifice or nozzle inlet conditions of 100 ± 0.5 in. Hg abs and 345 ± 10°F (174 ± 6°C).

FSC-2995

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:35Z
Check the source to verify that this is the current version before use.

Rate of Pressure Rise: The initial pressure rise shall be limited to a maximum of 22 psi/sec during the first 0.5 second after the first indication of pressure rise and thereafter the pressure rise shall be smooth and at a positive rate.

Opening and Closing Times: Open 5 seconds maximum; close 0.5 second maximum.

Pressure Drop: Pressure drop shall not exceed 0.3 psi.

Leakage: Internal shall not exceed 0.3 lb/rein and total shall not exceed 0.5 lb/rein when subjected to inlet air at 172 psig at 680 ± 30°F (360 ± 17°C).

Altitude:

a. Maximum operating: 40,000 ft

b. Maximum nonoperating: 60,000 ft

Ambient Temperature Range:

a. Operating: -65 to +250°F (-54 to +121°C)

b. Nonoperating: -65 to +370°F (-54 to +188°C) (with 5-minute transients of 415°F/218°C).

Flight and Ground Loading:

a. Flight maneuvering: 30g

b. Shear: 50 lb

c. Axial: 100 lb


d. Moment: 30 in-lb

Vibration: See Figure 2.

Military Part Number: The military part number of the valve shall be M81995/2. This valve supersedes ATSCV-2.

Preparing Activity
Navy-AS
(Project No. 2995-N030)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:35Z
Check the source to verify that this is the current version before use.

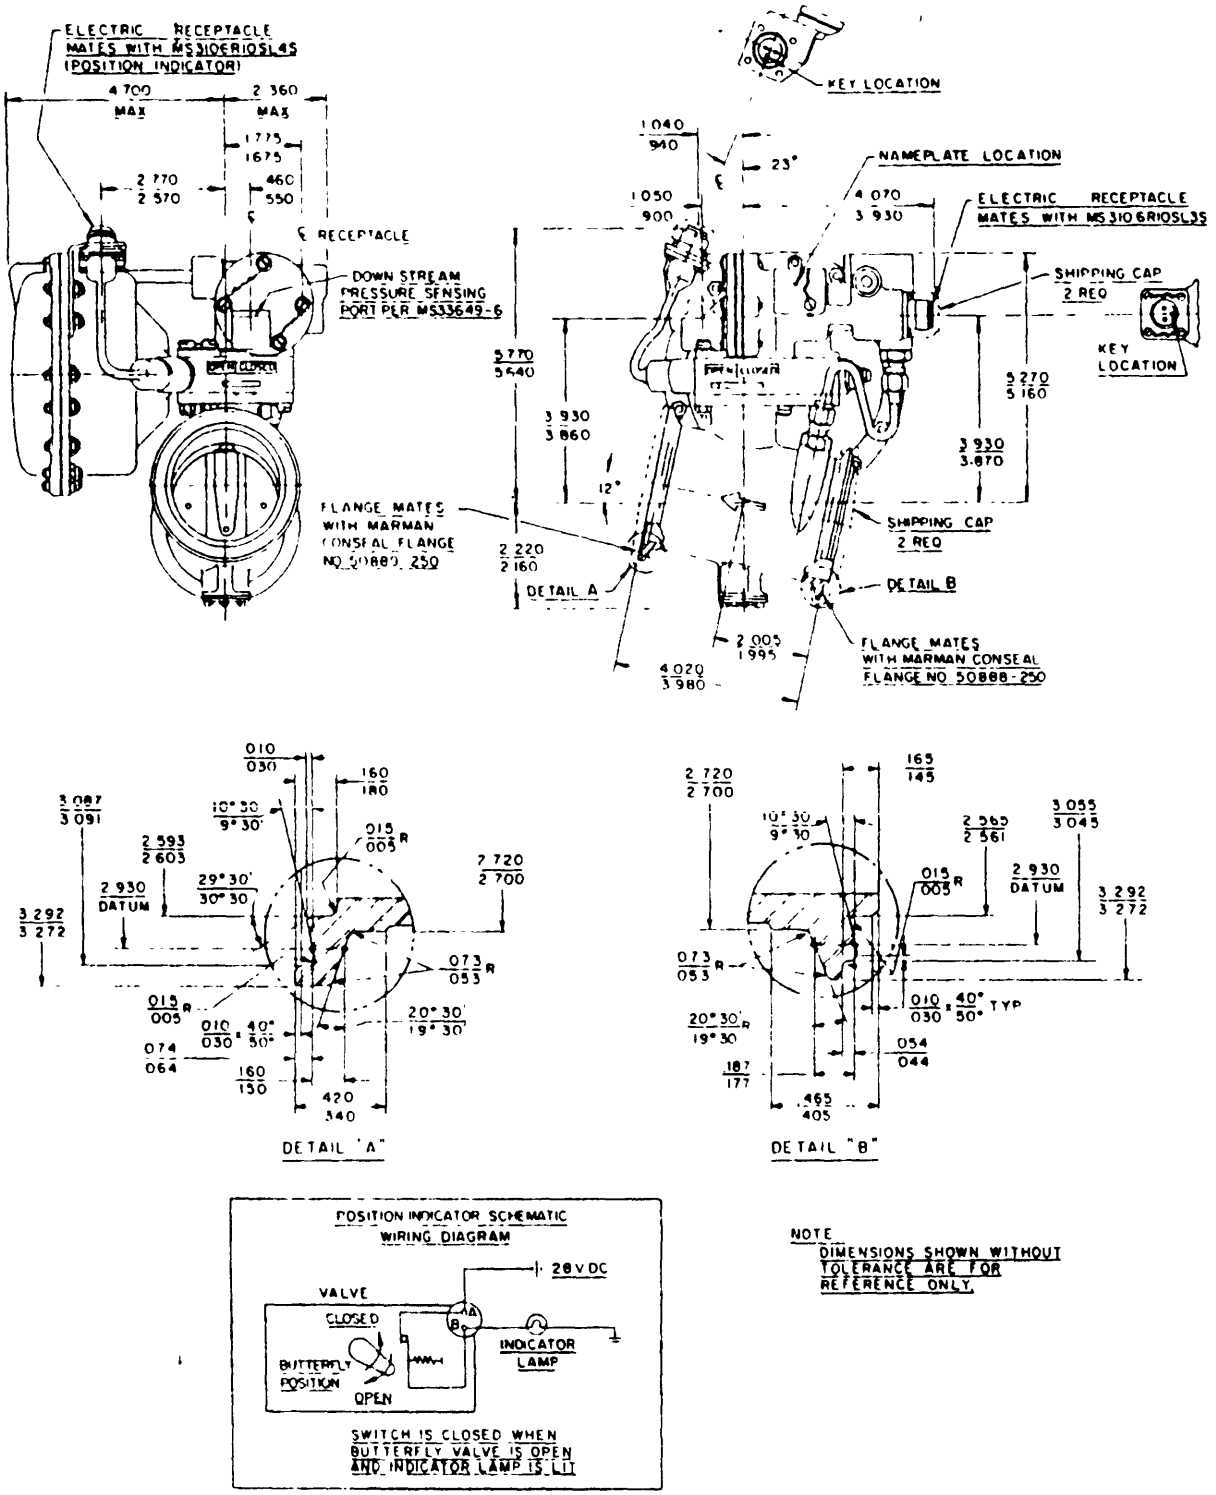

NOTE
DIMENSIONS SHOWN WITHOUT TOLERANCE ARE FOR REFERENCE ONLY.

FIGURE 1. Dimensions and electric circuit.

Source: https://assist.dla.mil -- Downloaded: 202610-23T06:35Z
Check the source to verify that this is the current version before use.

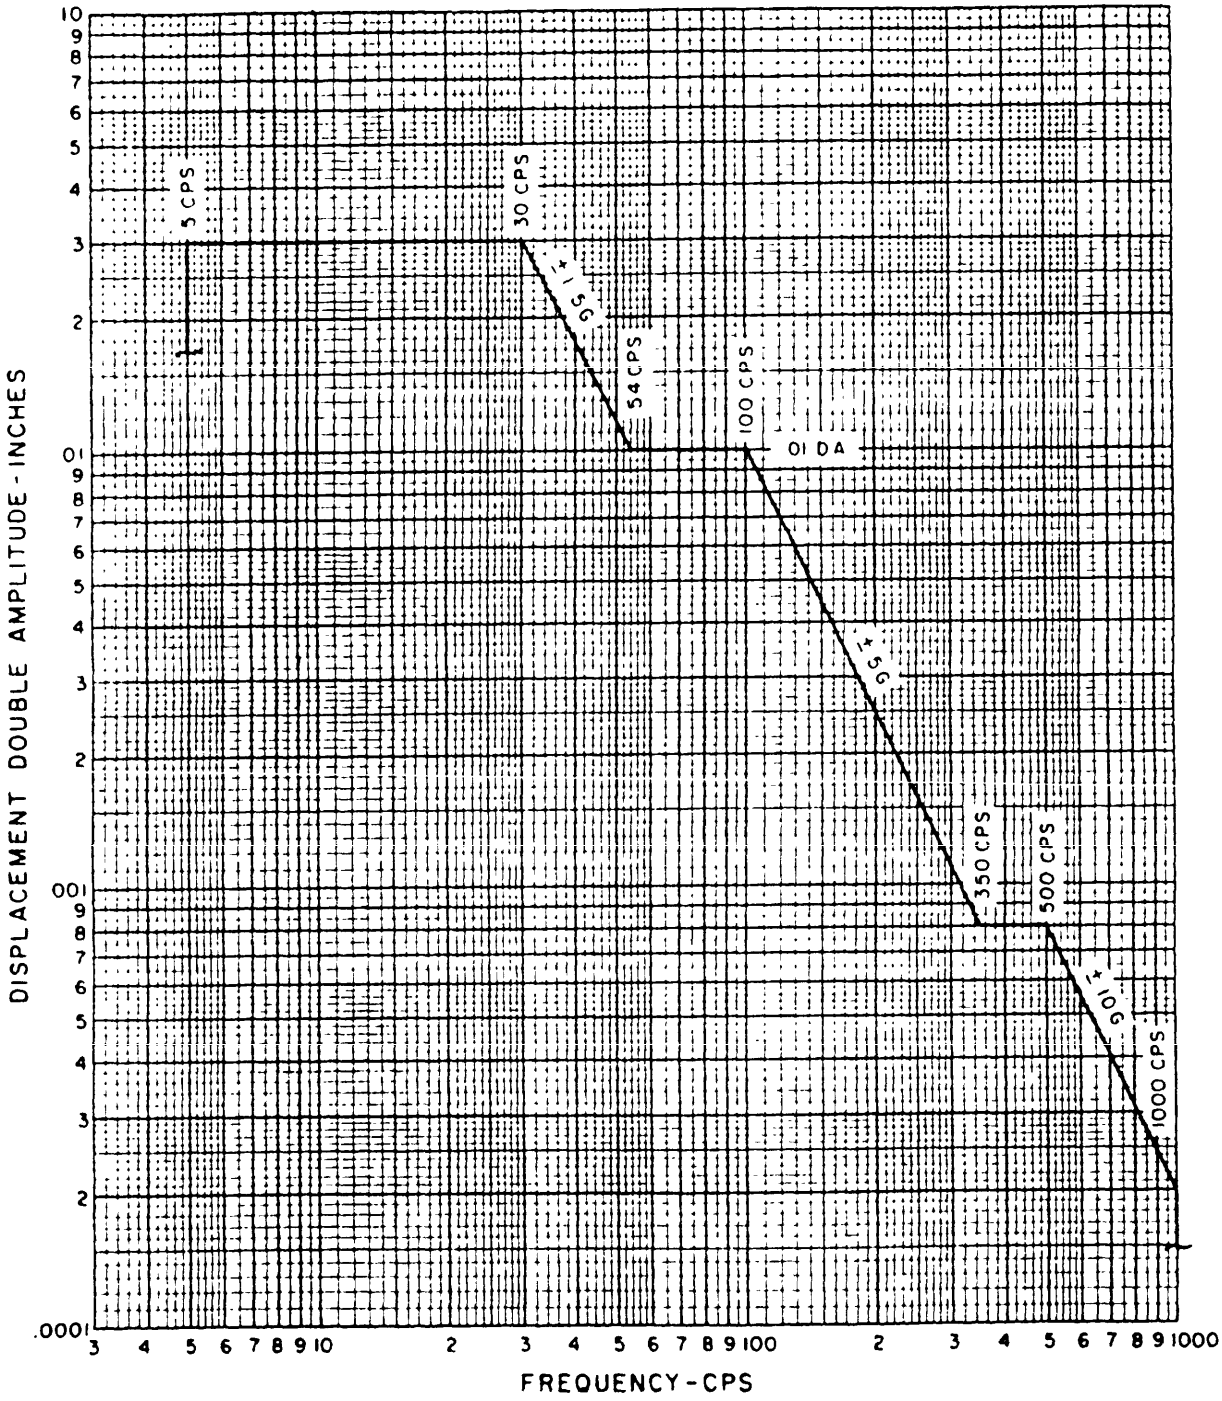


FIGURE 2. Vibration spectrum.

Source: https://assist.dla.mil -- Downloaded: 202640-23T06:35Z
Check the source to verify that this is the currentversion before use.

FOLD

Engineering Specifications and Standards Department
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
DEPARTMENT OF THE NAVY
DoD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:35Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-V-81995/2(AS) VALVE, STARTER CONTROL, AIRCRAFT ENGINE, FOR TF34 ENGINE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

[ ] VENDOR [ ] USER [ ] MANUFACTURER

1 [ ] HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? [ ] IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY (Printed or typed name and address – Optional)

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:35Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T06:35Z
Check the source to verify that this is the current version before use.