
MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES:
KEYING METHOD

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the key described herein shall consist of this document and the latest issue of specification MIL-C-55302.

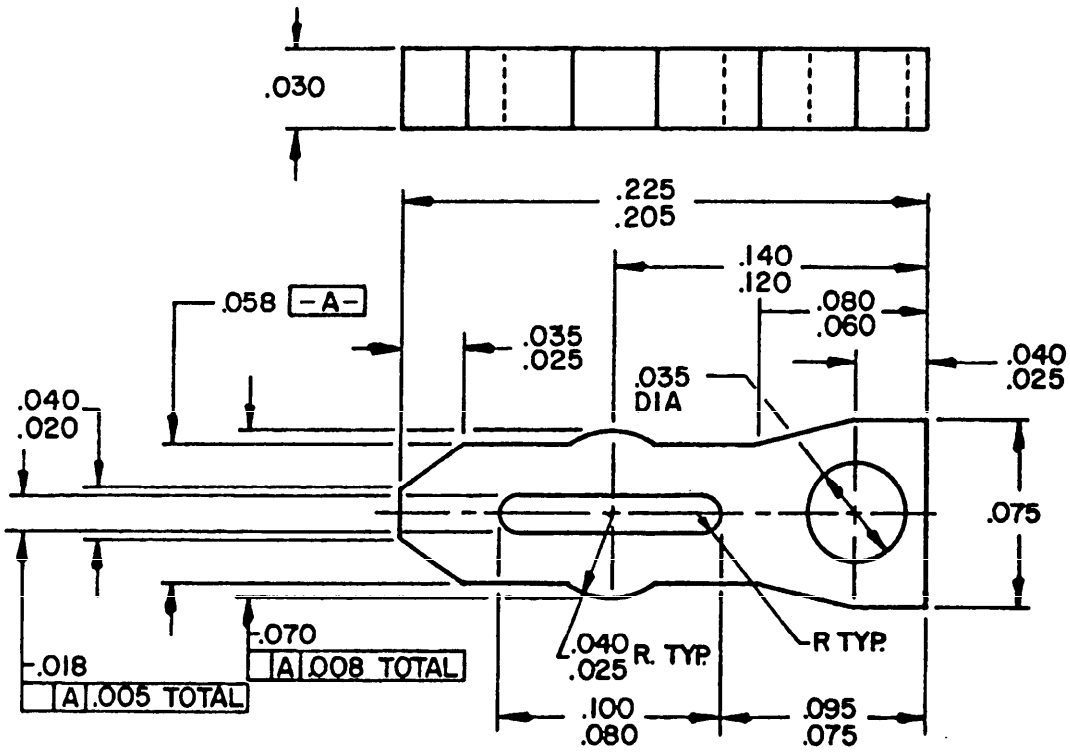

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.035	.89	.095	2.41
.008	.20	.040	1.02	.100	2.54
.018	.46	.058	1.47	.120	3.05
.020	.51	.060	1.52	.140	3.56
.025	.64	.070	1.78	.205	5.21
.030	.76	.075	1.90	.225	5.72
		.080	2.03		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.005 (.13 mm).

FIGURE 1. Key.

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

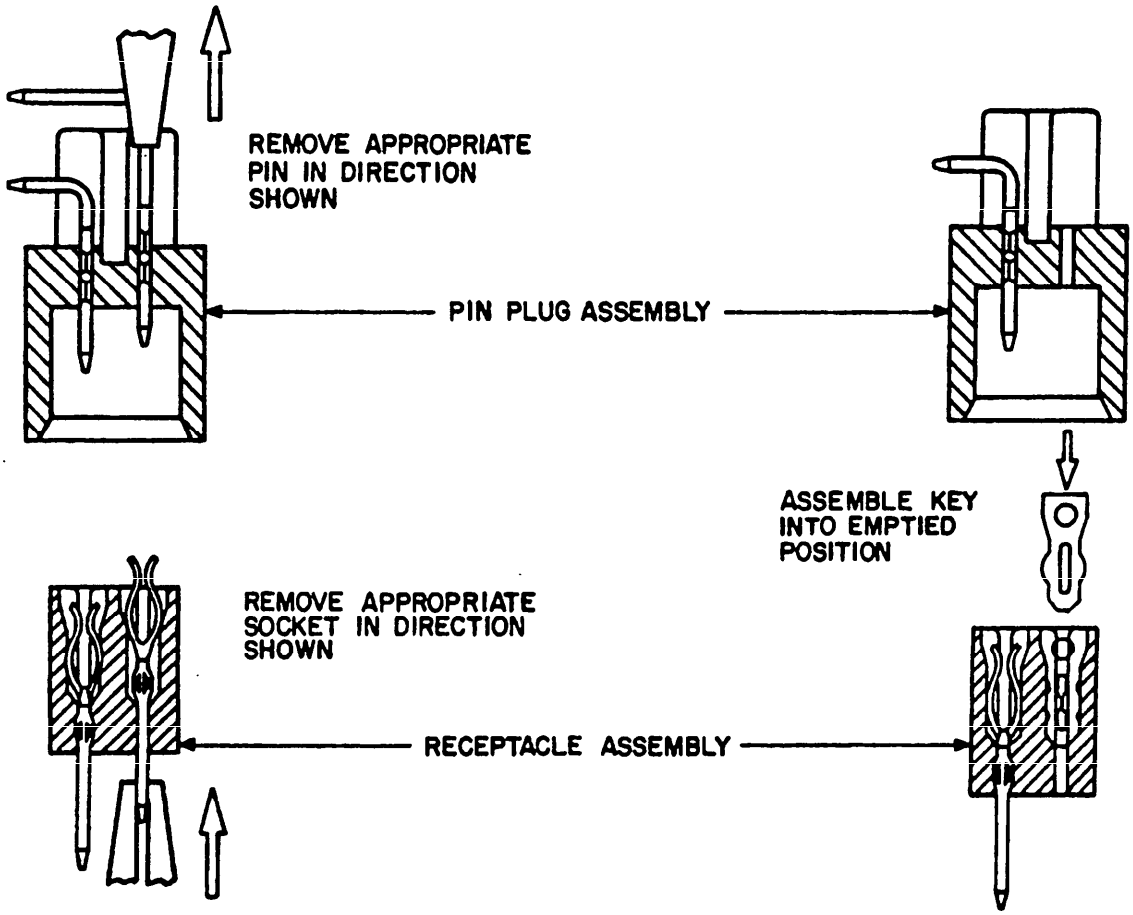


FIGURE 2. Contact removal.

FIGURE 3. Key installation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Material: Type I, polyamide (nylon) per MIL-M-20693.
Color: Yellow.
Application: This keying is to be used with connectors specified in MIL-C-55302/114 and MIL-C-55302/115.
Installation: See figures 2 and 3, remove appropriate contacts (figure 2), and install key (figure 3).
Qualification and quality conformance requirements are not applicable.
Part number: M55302/116-01

Custodians:
Army - EL
Navy - EC
Air Force - 17

Review activities:
Army - MI, AR
Navy - AS, OS
Air Force - 11, 17, 85, 99
DLA - ES

User activities:
Army - AT, AV, ME
Navy - MC, SH
Air Force - 19

Preparing activity:
Army - EL

Agent:
DLA - ES

(Project 5935-2086-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:50Z
Check the source to verify that this is the current version before use.