INCH-POUND

MIL-DTL-55302/151C
18 February 2005
SUPERSEDING
MIL-C-55302/151B
17 November 1988

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG WITH SOCKET CONTACTS, 2.717 INCHES LENGTH, FOR PRINTED WIRING BOARDS (.100 INCH SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.

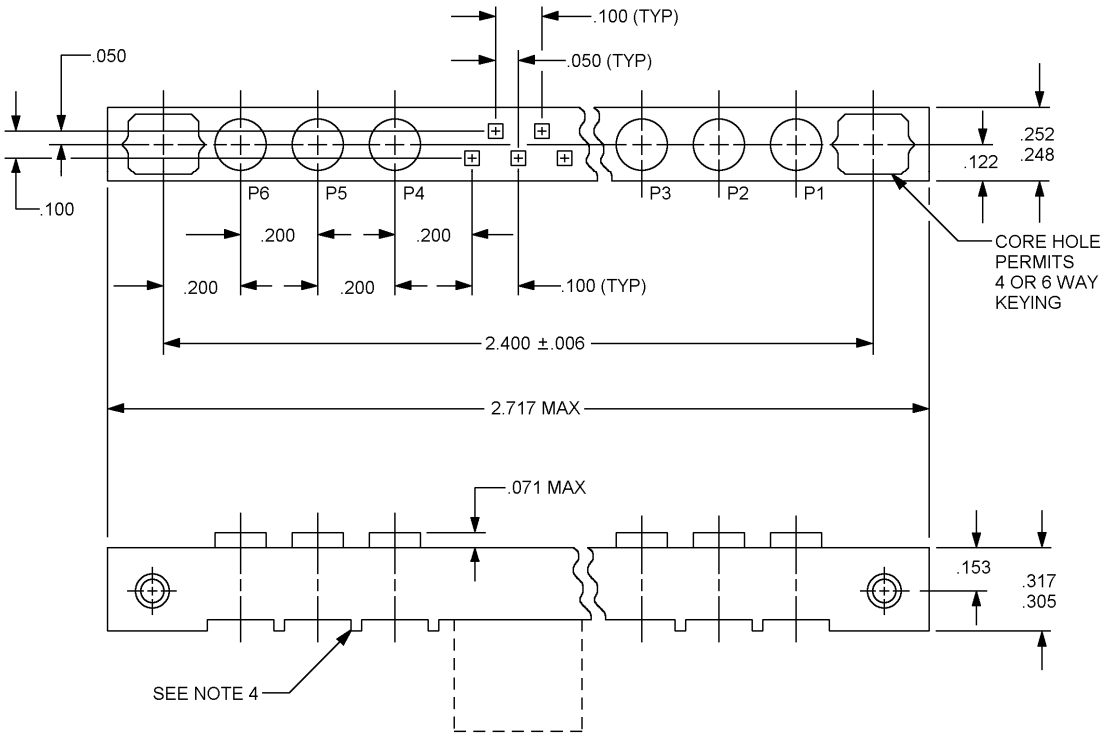


FIGURE 1. Connector, plug (.100 inch spacing).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.006	0.15	.248	6.30
.050	1.27	.252	6.40
.071	1.80	.305	7.75
.100	2.54	.317	8.52
.122	3.10	2.400	60.96
.153	3.89	2.717	69.01
.200	5.08		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Standoffs are located between each cable hole and between each hole and contact hole set.

FIGURE 1. Connector, plug (.100 inch spacing) - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

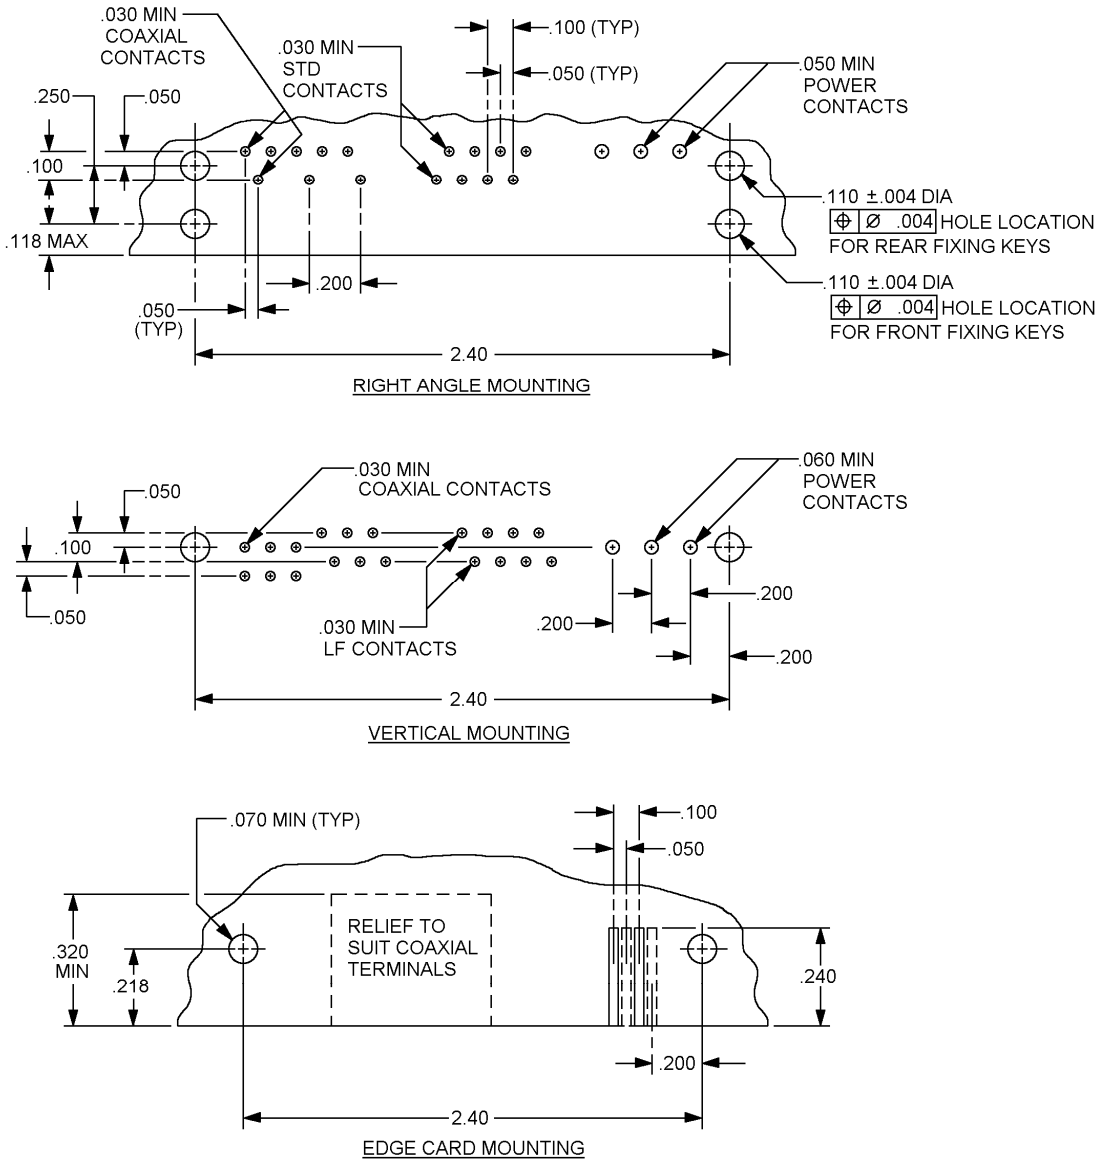


FIGURE 2. Recommended hole patterns.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.030	0.76	.106	2.69
.050	1.27	.118	3.00
.060	1.52	.200	5.08
.070	1.78	.240	6.10
.100	2.54	.320	8.13
		2.40	61.0


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).

FIGURE 2. Recommended hole patterns - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

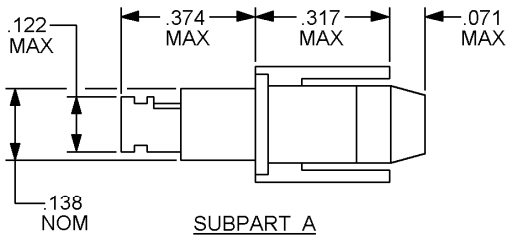


SUBPART A
FLEXIBLE CABLES

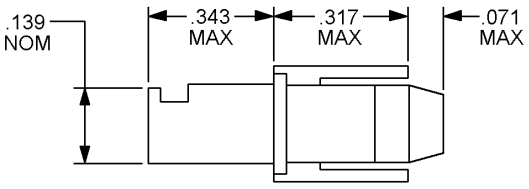


SUBPART B
SEMIRIGID CABLES

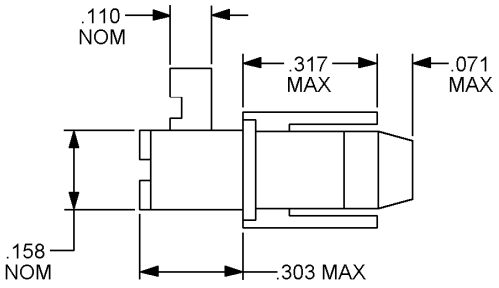


SUBPART C
90° FLEXIBLE CABLES

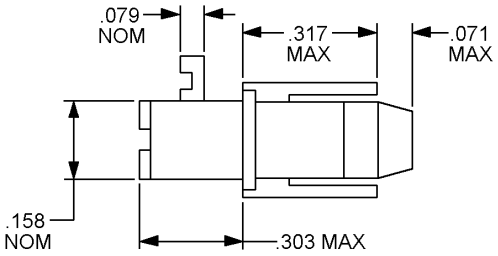


SUBPART D
90° SEMIRIGID CABLES

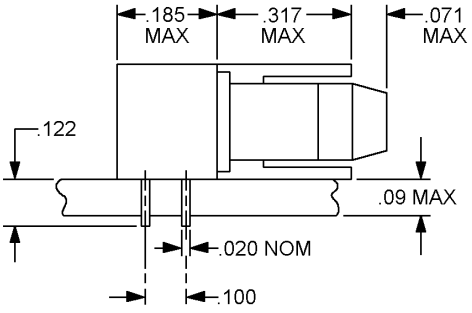

SUBPART E
90° PCB MOUNTING CABLES

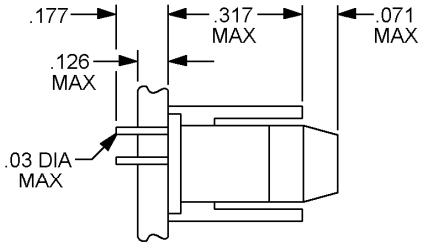


SUBPART F
VERTICAL MOUNTING PCB

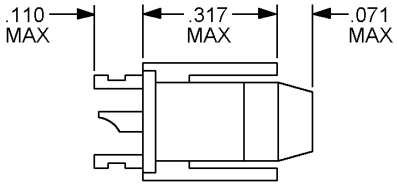


SUBPART G
SOLDER POSTS TWISTED BRAID

FIGURE 3. Coaxial configurations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

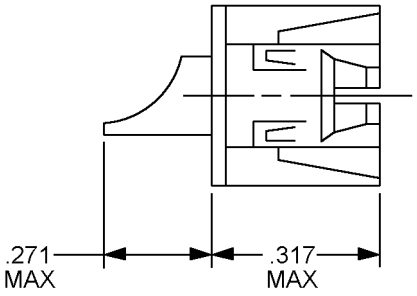

SUBPART H
SOLDER BUCKET

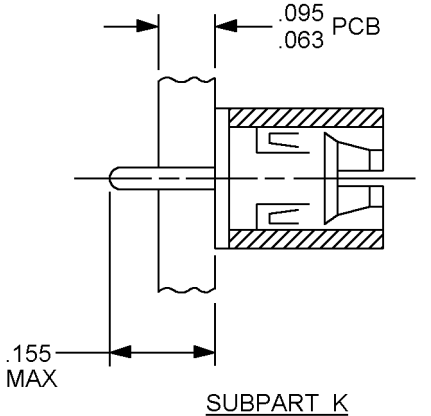

SUBPART K
VERTICAL MOUNTING PCB

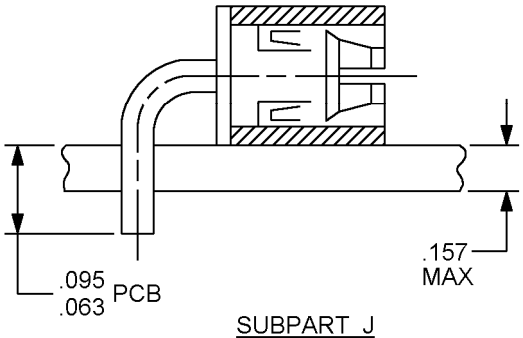

SUBPART J
90° PCB MOUNTING

Inches	mm	Inches	mm
.020	0.51	.138	3.51
.03	0.8	.139	3.53
.063	1.60	.155	3.94
.071	1.80	.157	3.99
.079	2.01	.158	4.01
.09	2.29	.177	4.50
.095	2.41	.185	4.70
.100	2.54	.271	6.88
.110	2.79	.303	7.70
.122	3.10	.317	8.05
.126	3.20	.343	8.71
		.374	9.50

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).

FIGURE 3. Coaxial configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

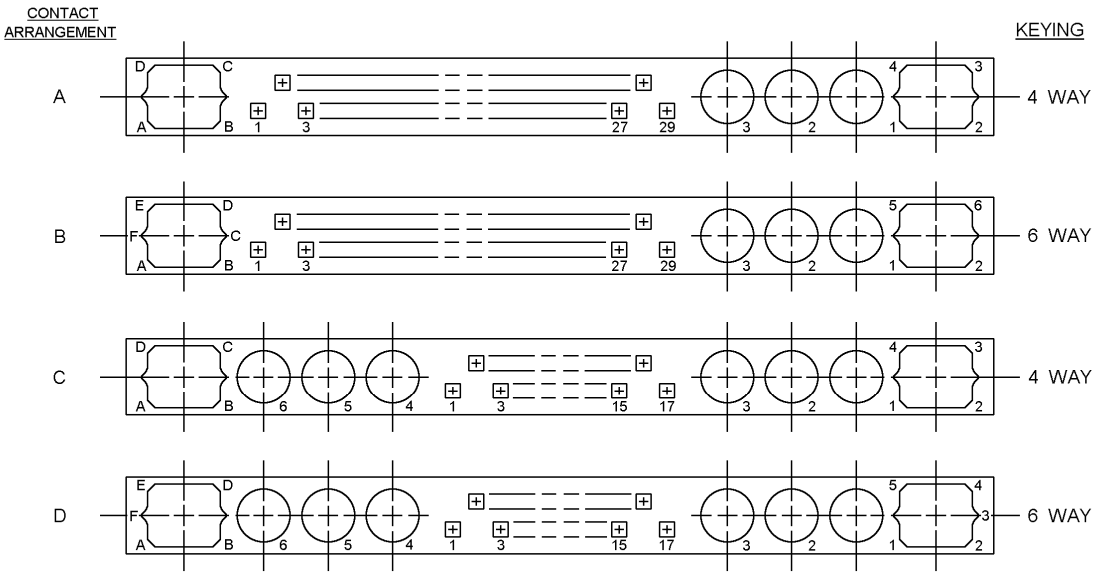


FIGURE 4. Contact and keying arrangements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

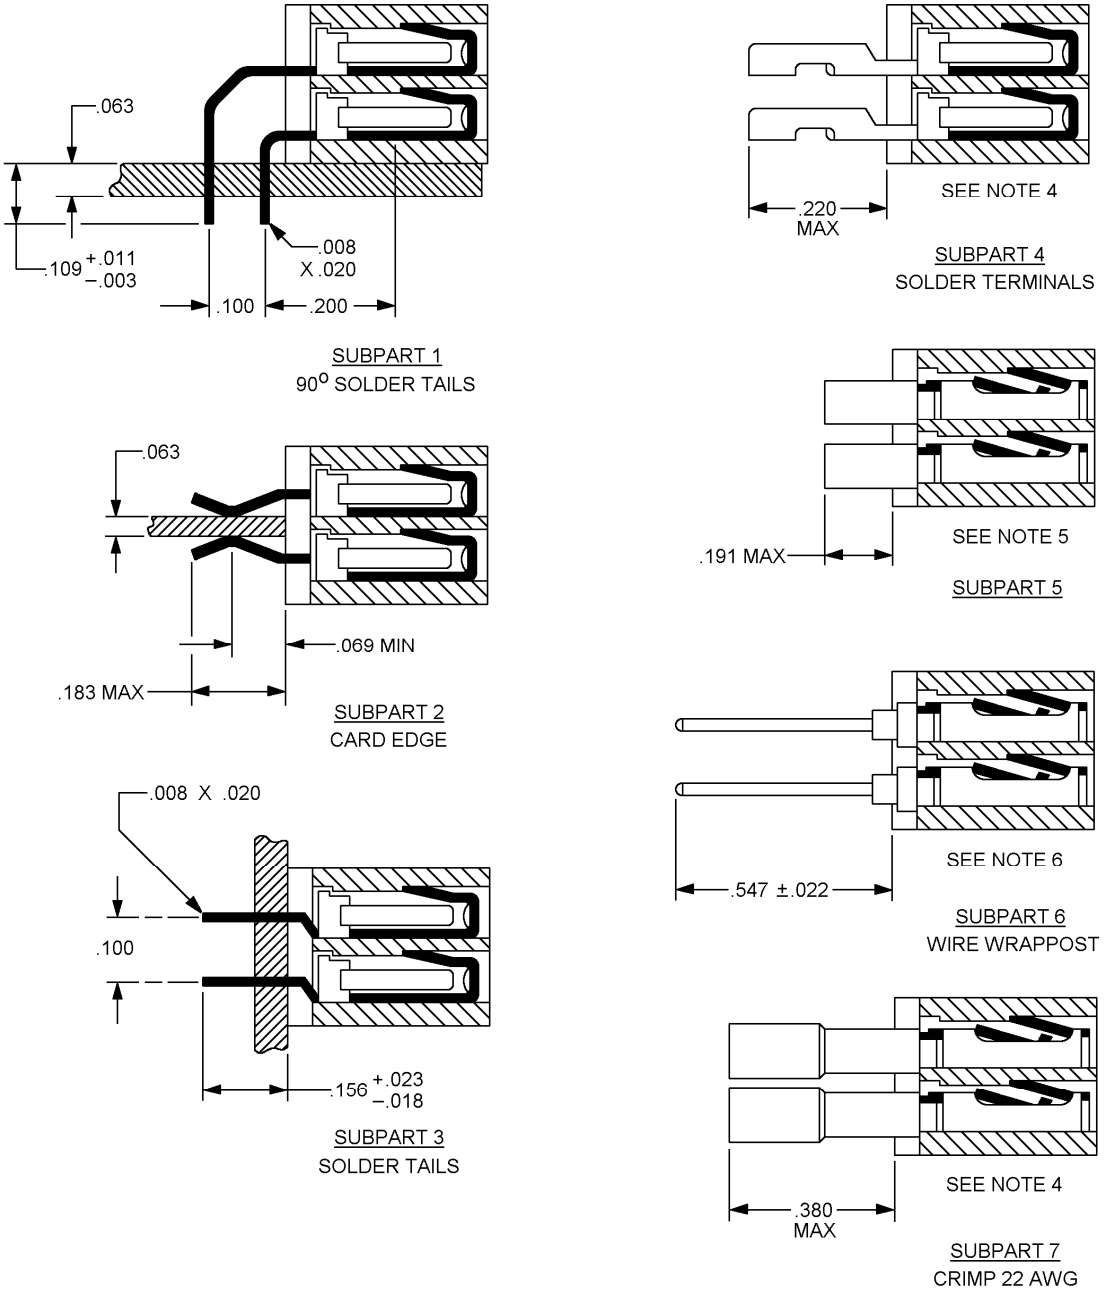


FIGURE 5. Contact terminations.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm
.003	0.08	.100	2.54
.008	0.20	.109	2.77
.011	0.28	.156	3.96
.018	0.46	.183	4.65
.020	0.51	.191	4.85
.022	0.56	.200	5.08
.023	0.58	.220	5.59
.063	1.60	.380	9.65
.069	1.75	.547	13.89


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Solder tail accepts no. 22 AWG wire.
5. Crimp contact accepts no. 22-26 AWG wire.
6. Contact with .025 inch square (0.64 mm) wrappost.

FIGURE 5. Contact terminations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

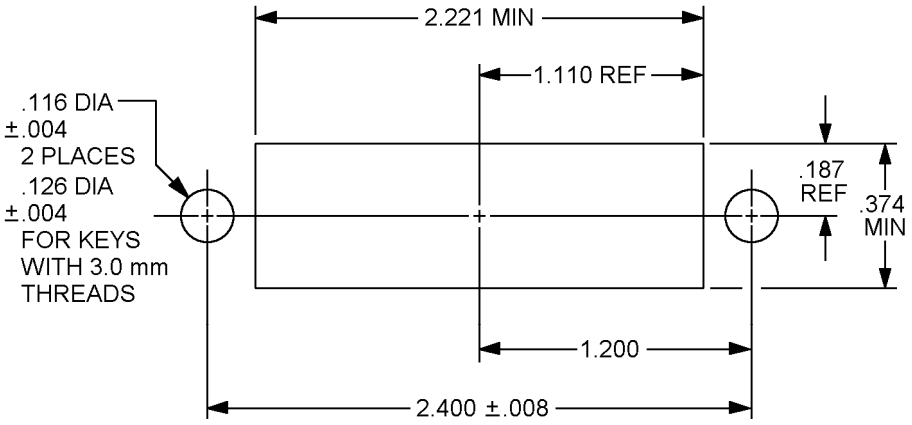

FIXED MOUNT

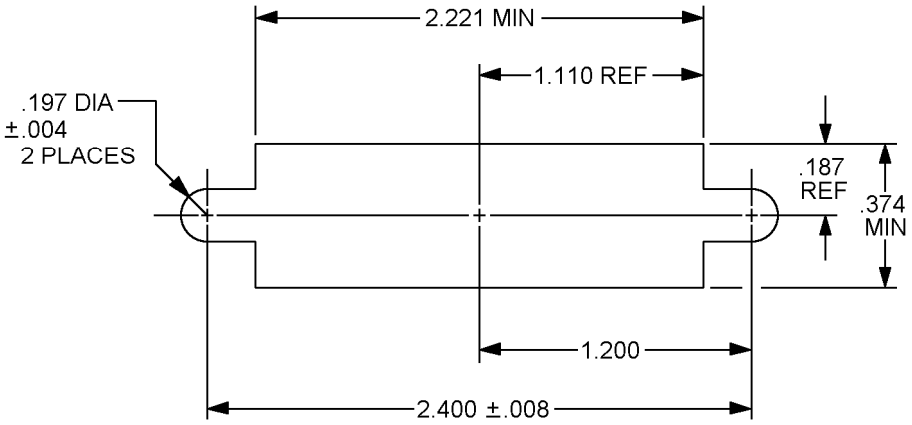

FLOATING MOUNT

Inches	mm	Inches	mm
.004	0.10	.374	9.50
.008	0.20	1.110	28.19
.116	2.95	1.200	30.48
.126	3.20	2.221	56.41
.187	4.75	2.400	60.96
.19	4.8		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .005 (0.13 mm).
4. Floating mount panel thickness .085 (2.15 mm) maximum.

FIGURE 6. Recommended panel cutouts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations: See figures 1 through 6.

Contact identification: See figure 4.

Contact retention: Coaxial and power: 11.25 pounds minimum.
Signal: .4 pounds minimum.

Mating and unmating force (per contact):	Coaxial	Power	Signal
(Min)	7.2 ounces	3.6 ounces	0.7 ounce
(Max)	36 ounces	18 ounces	3.6 ounces

Values for each connector to be addition of contacts according to contact type.

Contact separation: 3.5 ounces minimum.

Signal: 0.5 ounce minimum using test pins as specified in MIL-DTL-55302/142.

Coaxial: 0.5 ounce minimum using test pins as specified in MIL-DTL-55302/149.

Power: 1.5 ounce minimum using test pins as specified in MIL-DTL-55302/149.

Contact resistance: 12 milliohms maximum.

Dielectric withstanding voltage:

Sea level: 1,000 V rms, 60 Hz.

High altitude: 300 V rms, 60 Hz.

Current rating:

Power contacts: 25 amperes at 25°C.

Coaxial contacts: .5 ampere at 25°C.

Signal contacts: 3 amperes at 25°C.

Keying: Moldings and mounting hardware provide 16 or 36 polarizing positions according to choice of 4 or 6 way capability. Keys are constructed in accordance with MIL-DTL-55302/154. Connectors are supplied with hex pins in the “1” and “A” positions, except for 1/4-turn locking styles, which are keyed in “F” and “6” positions. When required, connectors can be easily keyed to desired position by using a simple wrench.

Hood types: As specified in MIL-DTL-55302/155.

Mounting hardware: As specified in MIL-DTL-55302/154.


Mating connectors: As specified in MIL-DTL-55302/146.

Oversize pin exclusion test: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

Part or Identifying Number (PIN): Consists of the letter M, the basic number of the specification sheet, and a dash number compiled as follows:

Example:

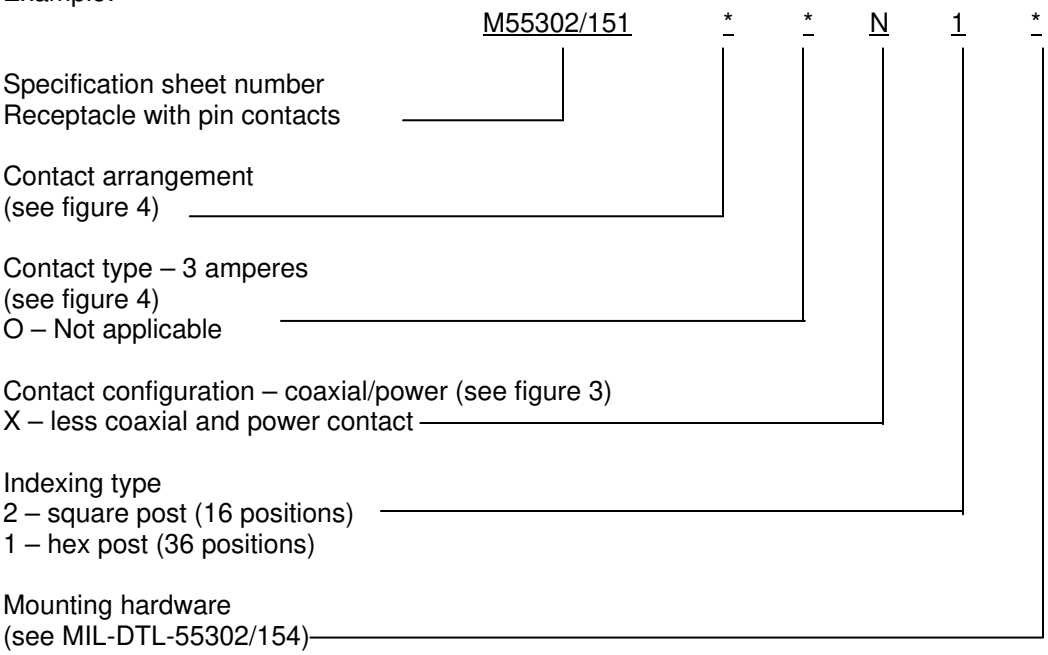

Previous note: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/142
MIL-DTL-55302/146
MIL-DTL-55302/149
MIL-DTL-55302/154
MIL-DTL-55302/155

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA – CC

Preparing activity:
DLA - CC

(Project 5935-4496-000)

Review activities:
Army – AR, AT, AV, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:53Z
Check the source to verify that this is the current version before use.