INCH-POUND

MIL-DTL-55302/191A
20 January 2006
SUPERSEDING
MIL-C-55302/191
22 November 1988

DETAIL SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES: PLUG, PIN CONTACTS, 100 POSITIONS, PRINTED WIRING BOARD (.075 SPACING)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-55302.



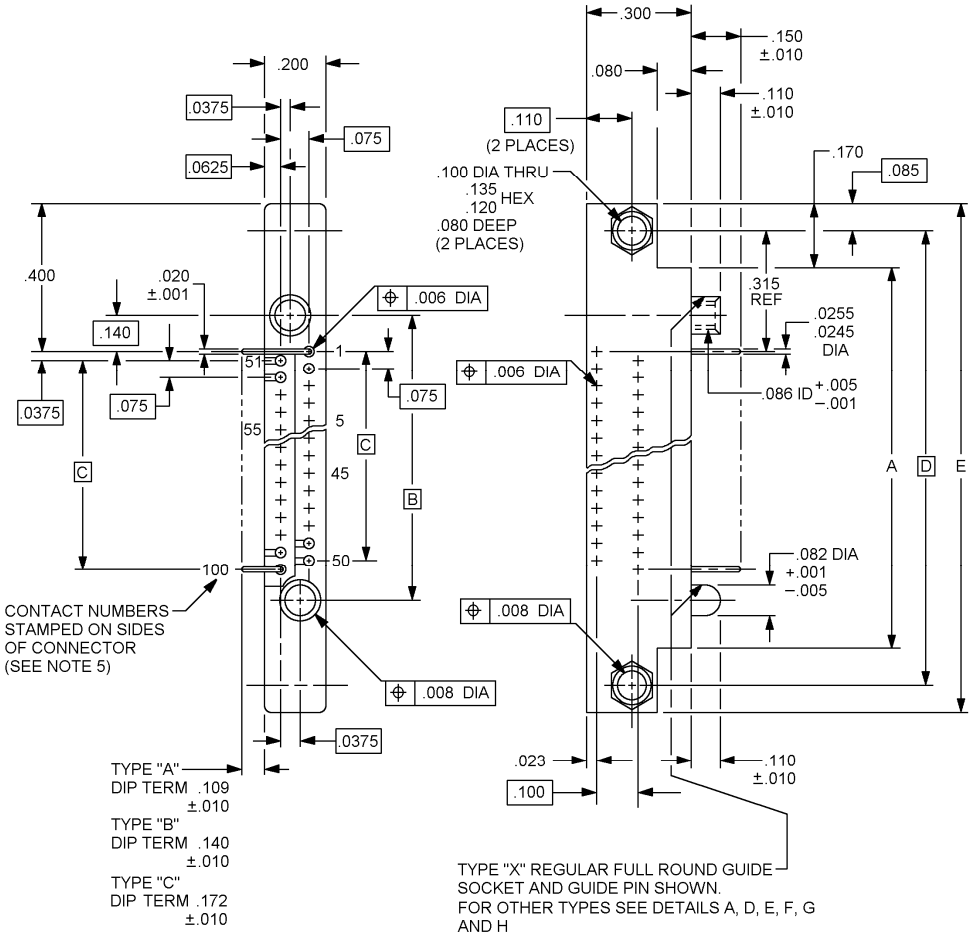


FIGURE 1. Connector, plug, .075 (1.91 mm) spacing.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

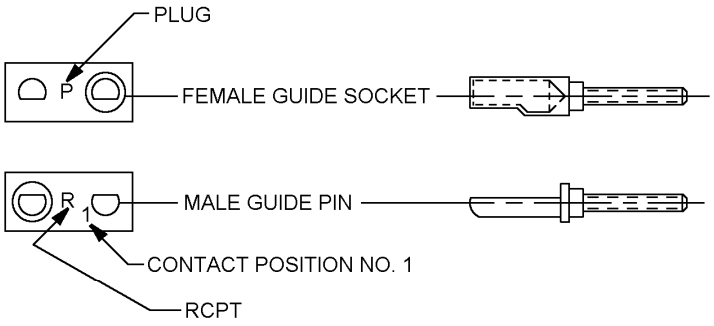

CONNECTOR POLARIZATION WITH "D" SHAPED GUIDE PINS AND SOCKETS. (TYPE "Y")

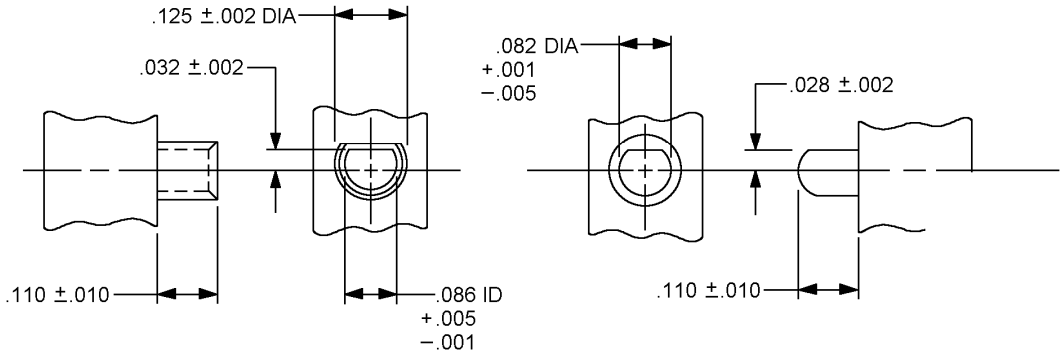


DETAIL A: POLARIZATION PIN/SOCKET
(FOR POLARIZATION CONFIGURATION SEE DETAIL "B")

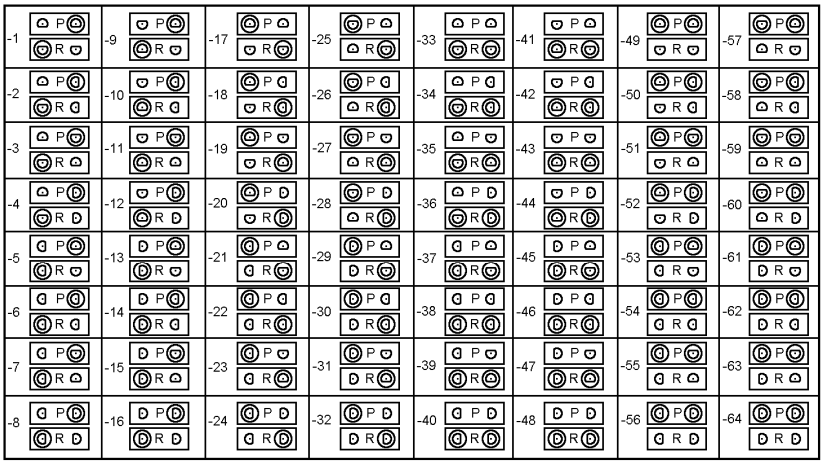


DETAIL B: POLARIZATION CONFIGURATION CHART

FIGURE 1. Connector, plug, .075 (1.91 mm) spacing - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

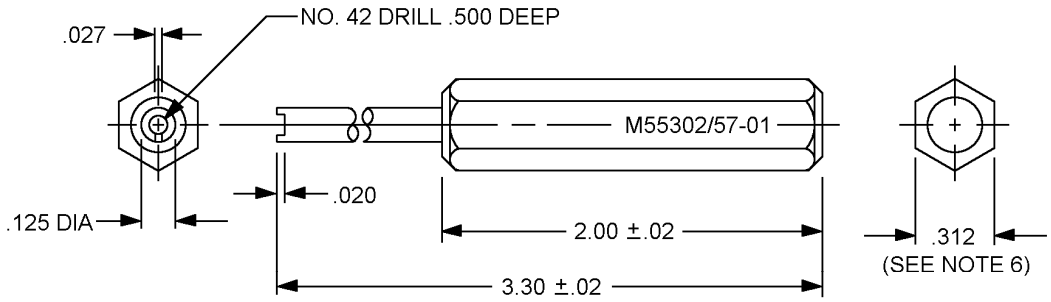

SPANNER WRENCH
DETAIL "C"

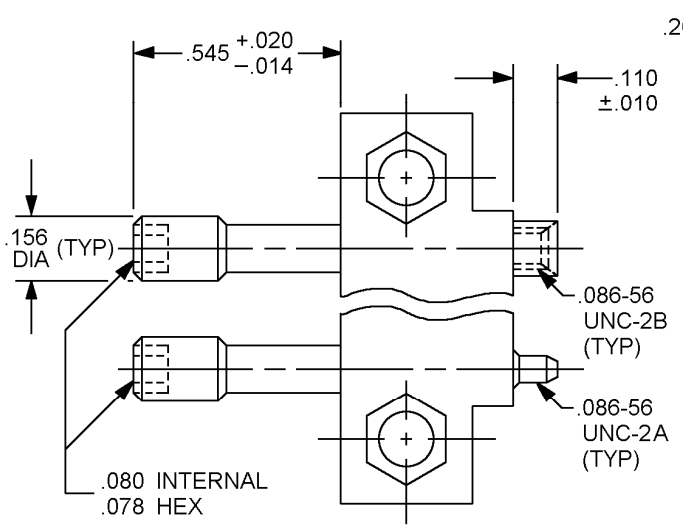


TYPE "N" TURNING HEX JACKSET
DETAIL "D"

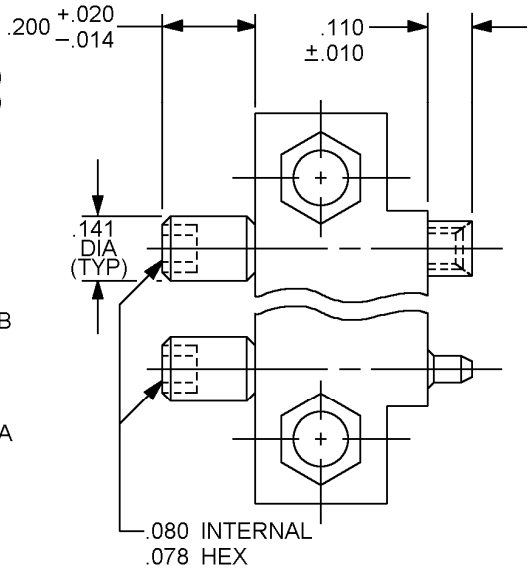

TYPE "S" SHORT TURNING HEX JACKSET
DETAIL "E"


FIGURE 1. Connector, plug, .075 (1.91 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

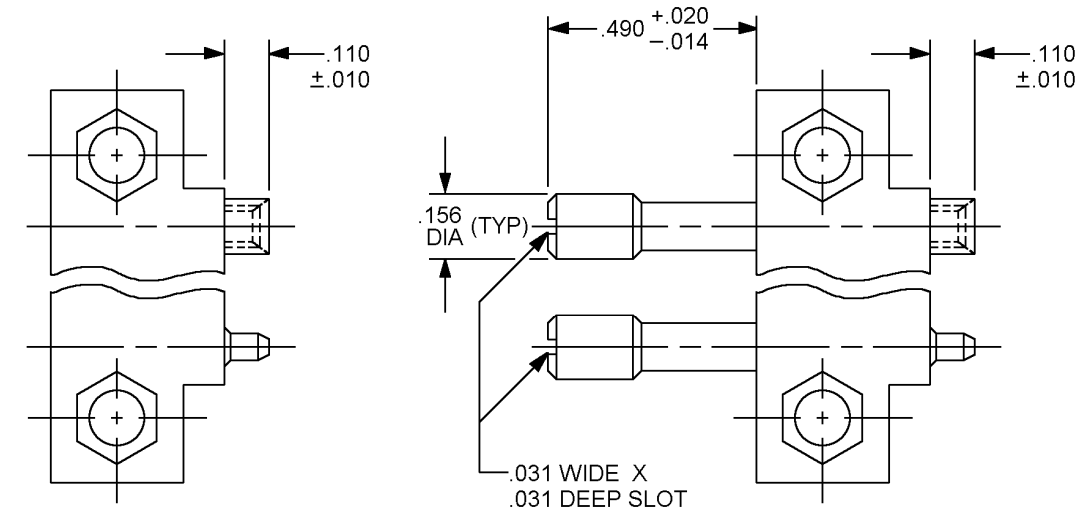

TYPE "F" FIXED JACKSET
DETAIL "F"


TYPE "M" SHORT TURNING
SLOTTED JACKSET
DETAIL "G"

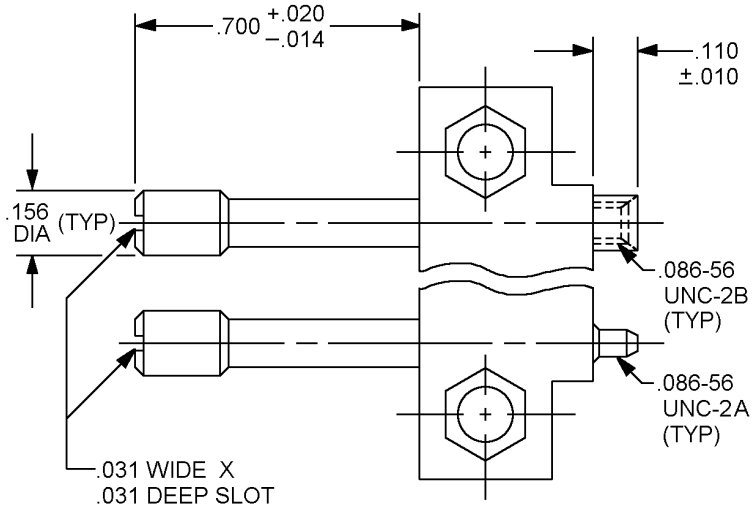

TYPE "L" TURNING
SLOTTED JACKSET
DETAIL "H"

FIGURE 1. Connector, plug, .075 (1.91 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

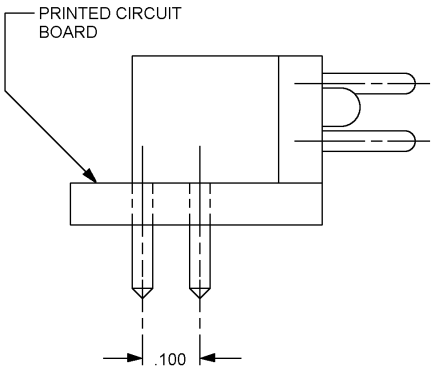

Number of contacts	Dimensions				
	A ± .010	BSC B	BSC C	BSC D	E ± .010
100	4.173 (105.99)	3.993 (101.42)	3.675 (93.35)	4.343 (110.31)	4.513 (114.63)

Inches	mm	Inches	mm	Inches	mm
.001	0.03	.0375	0.95	.150	3.81
.002	0.05	.0625	1.59	.156	3.96
.005	0.13	.075	1.91	.170	4.32
.006	0.15	.078	1.98	.172	4.37
.008	0.20	.080	2.03	.200	5.08
.010	0.25	.082	2.08	.300	7.62
.014	0.36	.085	2.16	.315	8.00
.020	0.51	.086	2.18	.375	9.53
.023	0.58	.100	2.54	.400	21.16
.0245	0.62	.109	2.77	.490	12.45
.0255	0.66	.110	2.79	.545	13.84
.027	0.69	.125	3.18	.700	17.78
		.135	3.43	2.00	50.80
		.141	3.58	3.30	83.82

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 (0.13 mm).
4. These connectors mate with connectors specified in MIL-DTL-55302/190 using appropriate hardware.
5. Numbers indicating the first and last position in each row and every fourth contact position in between shall be marked on the side(s) of the connector. As an option to the above, numbers indicating every fourth cavity may be stamped on the side of the connector, with exception that the number one contact shall be marked.
6. Handle shape optional.

FIGURE 1. Connector, plug, .075 (1.91 mm) spacing - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1.

Material: Guide pins, type X guide sockets, jackscrews, and jacksockets shall be made of corrosion resisting stainless steel in accordance with ASTM A581/A581M or ASTM A582/A582M, passivated in accordance with SAE-AMS-2700, or shall be corrosion resistant copper nickel alloy (61± 2 percent copper, 25 ± 2 percent nickel, 2.5 percent maximum other, and the balance zinc) and shall have a brinell hardness of 145 to 175. Type Y guide sockets shall be beryllium copper in accordance with ASTM B196/B196M or ASTM B197/B197M, nickel plated in accordance with SAE-AMS-QQ-N-290, class 02, 50 to 150 microinches.

Plating: The contact plating shall be in accordance with MIL-DTL-55302, or gold in accordance with ASTM B488, type II, code C, class 1.27, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 02, 50 to 150 microinches in the engaging area and gold in accordance with ASTM B488, type III, code C, class 0.51 or type II, code A class 0.51, over nickel plating in accordance with SAE-AMS-QQ-N-290, class 02, 50 to 150 microinches in the termination area.

Contact identification: See figure 1.

Jackscrews and jacksocket torque: 2 inch pounds max fully mated.

Contact resistance: The average contact resistance of all contacts measured shall not exceed 0.007 ohm, and no individual contact pair shall have a resistance exceeding 0.015 ohm.

Dielectric withstanding voltage:

Sea level: 750 volts rms.

High altitude: 250 volts rms at 70,000 feet.


Current rating: 3.0 amperes maximum per contact.

Polarization: Type X regular, guide pin and socket, full round (see figure 1). Type Y, adjustable “D” shaped guide pin and socket (see figure 1, detail D). All connectors are supplied in the -1 polarized position. For other than OEM use, connectors may be repolarized by using M55302/57-01 spanner wrench and M55302/190-01 guide pin and guide socket kit. When guides are removed and reinstalled in another position, apply Loctite 83-CV or equivalent on the threads. Ordering connectors in other than the -1 polarized position may be done by the OEM’s by placing the desired polarized position in brackets three spaces after the Part or Identifying Number (PIN)on the purchase order. Example: M55302/57-A10Y [-32]. Polarization pins and sockets shall be adjusted to any desired configuration by spanner wrench (M55302/57-01). Ordering connectors in the -1 polarized position without Loctite 83-CV or equivalent applied may be done by placing a “-0” in brackets three spaces after the PIN on the purchase order. Guide sets, as installed, shall withstand 7 ounce-inches backoff torque applied through the guide set mounting nut.

M55302/190-01 kit: Consists of one type Y ”D” shaped guide socket and one type Y “D” shaped guide pin and two spanner nuts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

Example of PIN:

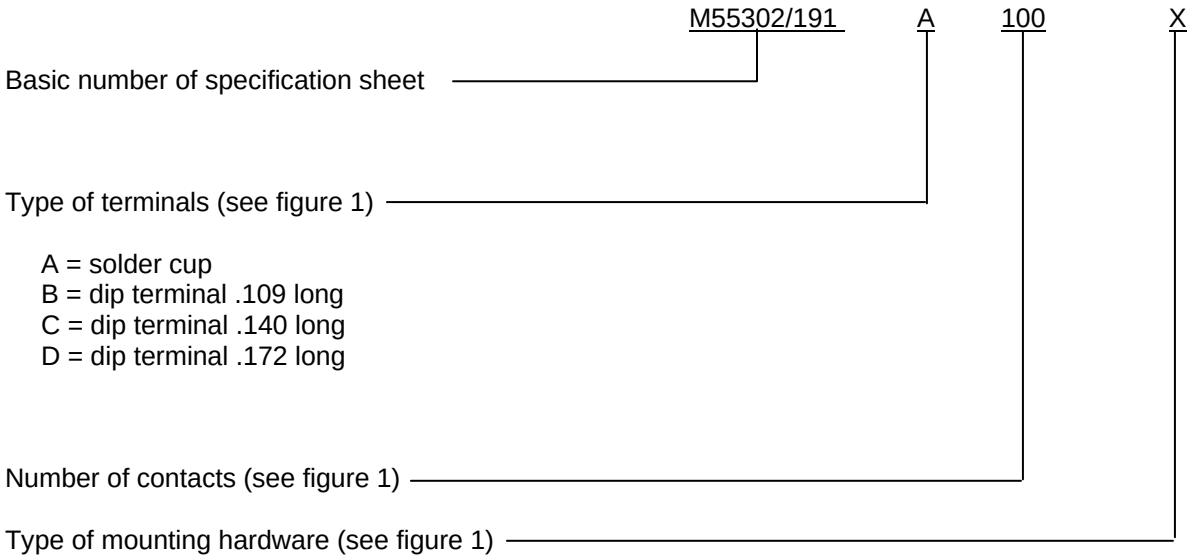

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-55302, this document references the following:

MIL-DTL-55302/190
ASTM A581/A581M
ASTM A582/A582M
ASTM B196/B196M
ASTM B197/B197M
ASTM B488
SAE-AMS-QQ-N-290
SAE-AMS-2700

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force – 11
DLA - CC

Preparing activity:
DLA - CC

(Project: 5935-4606-002)

Review activities:
Army - AR, AT, AV, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:57Z
Check the source to verify that this is the current version before use.