NOTE: The document identifier and heading has been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-49142/9B
5 November 1990
SUPERSEDING
MIL-C-49142/9A
13 September 1989

PERFORMANCE SPECIFICATION

CONNECTOR, TRIAXIAL, RADIO FREQUENCY, (SERIES TRT (CABLED) RECEPTACLE, SOCKET CONTACT, JAMNUT MOUNTED, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-49142

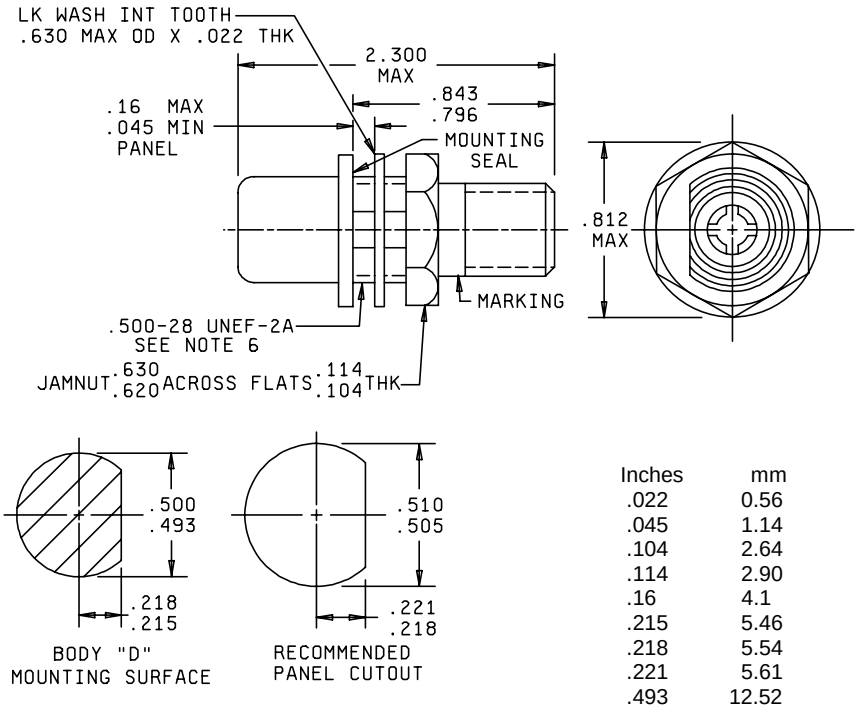

Inches	mm	Inches	mm
.022	0.56	.500	12.70
.045	1.14	.505	12.83
.104	2.64	.510	12.95
.114	2.90	.620	15.75
.16	4.1	.630	16.00
.215	5.46	.796	20.22
.218	5.54	.812	20.62
.221	5.61	.843	21.41
.493	12.52	2.300	58.42

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Wrench flats are to accommodate standard wrench openings in accordance with FED-STD-H28.
4. 2.300 (58.42 mm) defines the maximum length of the connector when assembled to the appropriate cable.
5. All undimensioned pictorial representations are for reference purposes only.
6. Full threads to within .063 (1.60 mm) of shoulder.
7. Interface shall be in accordance with MIL-STD-348, series TRT, socket contact.

FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:52Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: Nonconstant.

Frequency range: 0 to 500 MHz minimum.

Voltage rating. 400 V rms maximum working voltage at sea level. 100 V rms, maximum working voltage at 70,000 feet.

Temperature range: -65 to +165 degrees Celsius.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and MIL-STD-348.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 2.5 inch-pounds maximum.

Coupling proof torque: Not applicable.

Inspection conditions: Coupling torque - 4 to 6 inch-pounds.

Mating characteristics: See MIL-STD-348 for dimensions.

Center contact (socket):

Oversize test pin: 0.040 inch diameter minimum (nonclosed entry contacts only).

Insertion depth: .125 inch minimum.

Number of insertions: 1.

Insertion force test:

Steel test pin finish: 16 microinches.

Insertion force: 2 pounds maximum.

Steel test pin diameter: .039 inch minimum.

Withdrawal force test:

Steel test pin diameter: .037 inch maximum.

Withdrawal force: 2 ounces minimum.

Test pin finish: 16 microinches.

Permeability: Applicable.

Hermetic seal: Not applicable.

Leakage: Not applicable.

Insulation resistance: 5 000 megohms.

Center conductor retention: 6 pounds minimum axial force.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:52Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: At sea level, 1,200 V rms, between center conductor and intermediate conductor; 500 V rms, between intermediate conductor and outer conductor.

Salt spray (corrosion): Applicable.

Vibration: Applicable.

Shock: Applicable.

Thermal shock: Applicable (except high test temperature shall be 200 degrees Celsius for connectors using 200 degree Celsius cables).

Moisture resistance: Applicable.

Conductor resistance: In milliohms maximum.

	Initial	After environment
Center conductor:	2.0	2.5
Intermediate conductor:	0.5	0.6
Outer conductor:	0.2	0.3

TABLE I. Dash number and applicable cable.

Dash number	Cable 1/
Category A - No special tools required 2/ 3/	
0001	M17/134-00001
0002	M17/134-00002
0003 4/	D3-7619-5/336
0004 4/	D3-7619-5/338
0005 4/	380-10045-1
0006 5/ 3006 5/	M17/176-00002 6/
0007	M17/116-RG307
0009	M17/177-00001 6/

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dash number and applicable cable - Continued.

Dash number	Cable 1/
Category A - No special tools required 2/ 3/	
0010	M17/178-00001
0011	M17/179-00001
0012 3012	M24643/33-01UN
Category G - Use of MIL-C-22520 tool required for assembly 2/ 7/ 8/	
0013	M17/134-00001
0014	M17/134-00002
0015	M17/116-RG307
0016 3016	M17/45-RG108
0017 3017	M17/176-00002 6/
0018	M17/177-00001 6/
0019	M17/178-00001
0020	M17/179-00001
0021 3021	M24643/33-01UN

1/ The latest version of each cable shall be applicable.
2/ These connectors have captivated center contacts.
3/ Not for Navy use.
4/ Inactive for new design (see table III).
5/ Not for Air Force use.
6/ Cables to be used for the 200 degree Celsius thermal shock test.
7/ These connectors are assembled using the applicable crimping tool to the specified cables.
8/ Complete connector assembly shall consist of a body, center contact, intermediate contact, ferrule, and assembly instructions.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:52Z
Check the source to verify that this is the current version before use.

Corona level:

Altitude: 70,000 feet.

Voltage: 200 V rms minimum.

RF high potential withstanding voltage:

800 V rms, between center conductor and intermediate conductor.

200 V rms, between intermediate conductor and outer conductor at 5 MHz to 7.5 MHz.

Leakage current: Not applicable.

Cable retention force (for cable .200 inch to .325 inch outside dimension): 40 pounds minimum.

Coupling mechanism retention force: Not applicable.

Rise time degradation: 400 picoseconds maximum. 1/

Connector durability: 500 cycles minimum at 12 cycles per minute maximum.

Part or Identifying Number (PIN): M49142/09- (dash number from table I).

TABLE II. Group qualification. 1/

Group	Submission and qualification of any of the following dash numbers	Qualifies the following dash nos.
I	+001	+001
	+002	+002
	+005	+005
	+007	+007
	+009	+009
II	+003	+003
	+004	+004
	+010	+010
	+011	+011
III	+006	+006
	+012	+012
IV	+013	+013
	+014	+014
	+015	+015
	+018	+018
V	+021	+021
	+016	+016
	+017	+017
VI	+019	+019
	+020	+020

1/ If a connector manufacturer produces a connector which meets all the requirements for two or more connector PINs (within same series), the manufacturer may receive qualification approval for two or more connector PINs by qualifying the one connector. Each connector, however, must be marked with its own appropriate PIN. For group qualification, the connectors must be of similar design. Qualification of connectors qualifies connectors of the same body material and finish only. + designates body material and finish.

1/ Not applicable to connectors using twin conductor cables.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:52Z
Check the source to verify that this is the current version before use.

TABLE III. Cross-reference of cables.

Preferred cable	Superseded cable
M17/177-00001	380-10045-1
M17/178-00001	D3-7619-5/336
M17/179-00001	D3-7619-5,338

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA

Review activities:
Army - AR, MI
Navy - OS, SH
Air Force - 11, 17, 99

User activities:
Army - AT
Navy - AS, MC, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3798-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:52Z
Check the source to verify that this is the current version before use.