The requirements to comply with the changes in ESR testing must be completed by 6 months from the date of this document. Before then, use of the previous method is authorized.

INCH-POUND
MIL-PRF-55365/13B
w/AMENDMENT 1
24 March 2017
SUPERSEDING
MIL-PRF-55365/13B
18 October 2012

PERFORMANCE SPECIFICATION SHEET

CAPACITOR, CHIP, FIXED, TANTALUM, POLARIZED,
ESTABLISHED RELIABILITY AND NON-ESTABLISHED RELIABILITY,
STYLES CWR16 and CWR26

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55365.

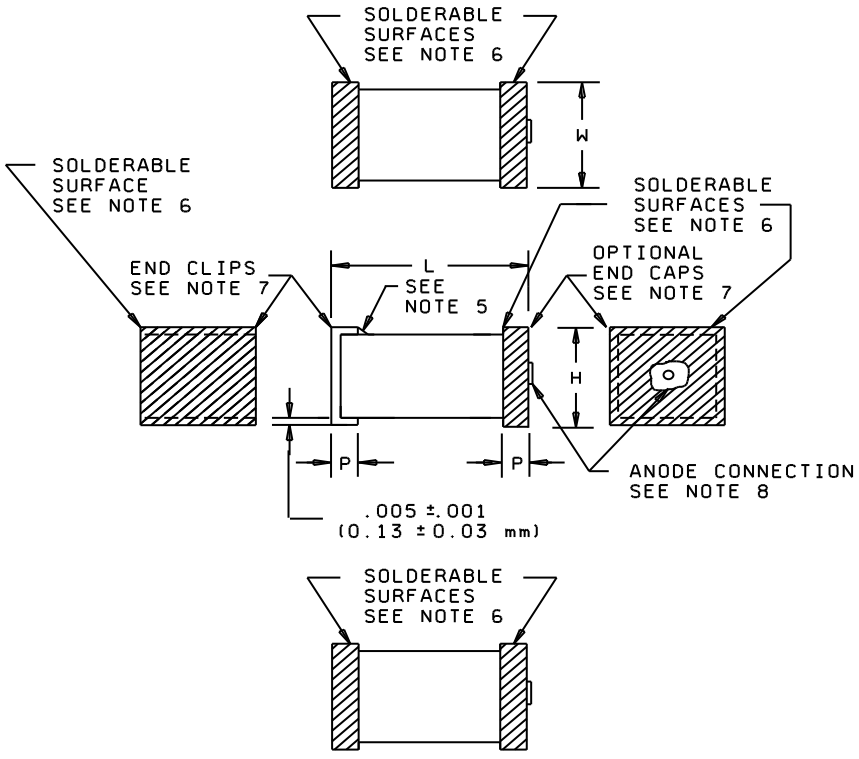


FIGURE 1. Styles CWR16 and CWR26 [conformally coated] capacitors.

AMSC N/A

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

Case size	L ± .015 (0.38)	W ±.015 (0.38)	H ±.015 (0.38)	P ±.005 (0.13)
A	.100 (2.54)	.050 (1.27)	.050 (1.27)	.030 (0.76)
B	.150 (3.81)	.050 (1.27)	.050 (1.27)	.030 (0.76)
C	.200 (5.08)	.050 (1.27)	.050 (1.27)	.030 (0.76)
D	.150 (3.81)	.100 (2.54)	.050 (1.27)	.030 (0.76)
E	.200 (5.08)	.100 (2.54)	.050 (1.27)	.030 (0.76)
F	.220 (5.59)	.135 (3.43)	.070 (1.78)	.030 (0.76)
G	.265 (6.73)	.110 (2.79)	.110 (2.79)	.050 (1.27)
H	.285 (7.24)	.150 (3.81)	.110 (2.79)	.050 (1.27)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses and given for general information only.
3. Metric equivalents are in millimeters.
4. These capacitors are designed for mounting by dip soldering, thermo-compression bonding, reflow soldering, or other conventional means.
5. Cathode terminal may be epoxy coated on one surface for polarity identification.
6. Solderable surfaces are only those surfaces designated as such.
7. Anode and cathode terminals may be two-sided through five-sided, and may not be the same on some designs, but will meet all specification requirements.
8. The anode terminal shall be identified by the riser wire connection, which may extend the case size .015 inch (0.38 mm) maximum. The riser wire weld area is not solderable. The riser wire connection shall have a continuous weld of a minimum of 25 percent of the contact surface.
9. When solder coated terminations are required, add .015 inch (0.38 mm) to termination dimension tolerances.
10. CWR16 capacitors have higher capacitance values than CWR06s of the same case size and voltage rating (see MIL-PRF-55365/4). CWR26s are low ESR versions of both CWR06s and CWR16s.

FIGURE 1. Styles CWR16 and CWR26 [conformally coated] capacitors - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Termination finish: In accordance with termination finishes B, C, H, or K of MIL-PRF-55365.

DC rated voltage: See table I or table II. Above +85°C, voltage derating is required (see MIL-PRF-55365).

Operating temperature range: -55°C to +125°C.

Product level designator: In accordance with MIL-PRF-55365.

DC leakage (DCL): See table I or table II.

Capacitance: See table I or table II.

Capacitance tolerance: ±5 percent (J), ±10 percent (K), or ±20 percent (M).

Dissipation factor (DF): See table I or table II.

Equivalent series resistance (ESR): In accordance with MIL-PRF-55365 (see table I or table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

Moisture resistance:

CWR16: In accordance with MIL-PRF-55365.

CWR26: In accordance with MIL-PRF-55365, except:

Initial measurements: Capacitance and ESR.

Final measurements:

DCL, capacitance, and DF: In accordance with MIL-PRF-55365.

ESR: Shall not exceed 200 percent of the specified value (see table I or table II) and shall not change more than 100 percent from the initial measured value.

Solderability: In accordance with MIL-PRF-55365 except that following steam aging, test samples may have a 30 minute bake out at +150°C prior to solder dipping and all terminations shall exhibit a continuous solder coating free from defects for a minimum of 75 percent of the critical area of any individual termination.

TABLE I. Style CWR16 characteristics.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR16C - 335 - - A -	4	3.3	1	10	12	6	8	8	12	A
CWR16C - 475 - - A -	4	4.7	1	10	12	6	8	8	12	A
CWR16C - 685 - - A -	4	6.8	1	10	12	6	8	8	12	A
CWR16C - 106 - - B -	4	10	1	10	12	8	10	10	8	B
CWR16C - 156 - - B -	4	15	1	10	12	8	10	10	8	B
CWR16C - 226 - - B -	4	22	1	10	12	8	10	10	8	B
CWR16C - 226 - - D -	4	22	1	10	12	8	10	12	4	D
CWR16C - 336 - - D -	4	33	2	20	24	8	10	12	4	D
CWR16C - 336 - - E -	4	33	2	20	24	8	10	12	3	E
CWR16C - 476 - - E -	4	47	2	20	24	8	10	12	3	E
CWR16C - 686 - - E -	4	68	3	30	36	8	10	12	3	E
CWR16C - 107 - - F -	4	100	4	40	48	10	12	12	2	F
CWR16C - 157 - - G -	4	150	6	60	72	10	12	12	1	G
CWR16C - 227 - - H -	4	220	8	80	96	10	12	12	1	H
CWR16C - 337 - - H -	4	330	10	100	120	10	12	12	0.9	H
CWR16D - 335 - - A -	6	3.3	1	10	12	6	8	8	12	A
CWR16D - 475 - - A -	6	4.7	1	10	12	6	8	8	12	A
CWR16D - 685 - - B -	6	6.8	1	10	12	6	8	8	8	B
CWR16D - 106 - - B -	6	10	1	10	12	6	8	8	8	B
CWR16D - 156 - - B -	6	15	1	10	12	8	10	10	8	B
CWR16D - 156 - - D -	6	15	1	10	12	8	10	12	5	D
CWR16D - 156 - - E -	6	15	1	10	12	8	10	12	3	E
CWR16D - 226 - - D -	6	22	1	10	12	6	8	8	5	D
CWR16D - 226 - - E -	6	22	2	20	24	8	10	12	3.5	E
CWR16D - 336 - - E -	6	33	2	20	24	6	8	8	3.5	E
CWR16D - 476 - - F -	6	47	3	30	36	8	10	12	3.5	F
CWR16D - 686 - - F -	6	68	4	40	48	10	12	12	1.5	F
CWR16D - 686 - - G -	6	68	4	40	48	10	12	12	1	G
CWR16D - 107 - - G -	6	100	6	60	72	10	12	12	1.1	G
CWR16D - 157 - - G -	6	150	10	100	120	10	12	12	1.1	G
CWR16D - 227 - - H -	6	220	10	100	120	10	12	12	0.9	H
CWR16D - 337 - - H -	6	330	20	200	240	10	12	12	0.9	H

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE I. Style CWR16 characteristics - Continued.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR16F - 225 - - A -	10	2.2	1	10	12	6	8	8	12	A
CWR16F - 335 - - A -	10	3.3	1	10	12	6	8	8	12	A
CWR16F - 475 - - B -	10	4.7	1	10	12	6	8	8	8	B
CWR16F - 475 - - C -	10	4.7	1	10	12	6	8	8	5.5	C
CWR16F - 685 - - B -	10	6.8	1	10	12	6	8	8	8	B
CWR16F - 685 - - C -	10	6.8	1	10	12	6	8	8	5.5	C
CWR16F - 685 - - D -	10	6.8	1	10	12	6	8	8	5	D
CWR16F - 106 - - B -	10	10	1	10	12	8	10	10	8	B
CWR16F - 106 - - C -	10	10	1	10	12	6	8	8	5.5	C
CWR16F - 106 - - D -	10	10	1	10	12	6	8	8	4	D
CWR16F - 106 - - E -	10	10	1	10	12	6	8	8	3.5	E
CWR16F - 156 - - D -	10	15	1	10	12	6	8	8	5	D
CWR16F - 156 - - E -	10	15	2	20	24	8	10	10	3	E
CWR16F - 226 - - E -	10	22	3	30	36	8	10	10	2	E
CWR16F - 336 - - F -	10	33	3	30	36	8	10	10	1.5	F
CWR16F - 476 - - F -	10	47	4	40	48	10	12	12	1.5	F
CWR16F - 476 - - G -	10	47	4	40	48	10	12	12	1	G
CWR16F - 686 - - G -	10	68	6	60	72	10	12	12	1.1	G
CWR16F - 107 - - G -	10	100	10	100	120	10	12	12	1.1	G
CWR16F - 107 - - H -	10	100	10	100	120	10	12	12	0.9	H
CWR16F - 157 - - H -	10	150	15	150	180	10	12	12	0.9	H
CWR16F - 227 - - H -	10	220	20	200	240	10	12	12	0.9	H
CWR16H - 105 - - A -	15	1	1	10	12	6	8	8	15	A
CWR16H - 155 - - A -	15	1.5	1	10	12	6	8	8	15	A
CWR16H - 225 - - A -	15	2.2	1	10	12	6	8	8	15	A
CWR16H - 335 - - B -	15	3.3	1	10	12	6	8	8	9	B
CWR16H - 475 - - B -	15	4.7	1	10	12	6	8	8	5	B
CWR16H - 475 - - C -	15	4.7	1	10	12	6	8	8	5.5	C
CWR16H - 475 - - D -	15	4.7	1	10	12	6	8	8	6	D
CWR16H - 685 - - D -	15	6.8	1	10	12	6	8	8	6	D
CWR16H - 685 - - E -	15	6.8	1	10	12	8	10	12	3	E
CWR16H - 106 - - D -	15	10	2	20	24	6	8	8	6	D
CWR16H - 106 - - E -	15	10	2	20	24	6	8	8	4	E
CWR16H - 156 - - E -	15	15	2	20	24	6	8	8	4	E
CWR16H - 156 - - F -	15	15	2	20	24	8	10	10	3	F
CWR16H - 226 - - F -	15	22	3	30	36	8	10	10	3	F
CWR16H - 336 - - F -	15	33	5	50	60	6	8	8	3	F
CWR16H - 336 - - G -	15	33	6	60	72	8	10	10	1.1	G
CWR16H - 476 - - G -	15	47	10	100	120	8	10	10	1.1	G
CWR16H - 476 - - H -	15	47	10	100	120	8	10	10	0.9	H
CWR16H - 686 - - G -	15	68	10	100	120	8	10	10	1.1	G
CWR16H - 686 - - H -	15	68	10	100	120	8	10	10	0.9	H
CWR16H - 107 - - H -	15	100	15	150	180	10	12	12	0.9	H
CWR16J - 684 - - A -	20	0.68	1	10	12	6	8	8	15	A
CWR16J - 105 - - A -	20	1	1	10	12	6	8	8	15	A
CWR16J - 155 - - B -	20	1.5	1	10	12	6	8	8	9	B
CWR16J - 225 - - B -	20	2.2	1	10	12	6	8	8	9	B
CWR16J - 335 - - D -	20	3.3	1	10	12	6	8	8	6	D
CWR16J - 475 - - E -	20	4.7	1	10	12	6	8	8	6	E
CWR16J - 685 - - E -	20	6.8	2	20	24	6	8	8	5	E
CWR16J - 106 - - E -	20	10	2	20	24	6	8	8	5	E
CWR16J - 106 - - F -	20	10	2	20	24	6	8	8	3	F
CWR16J - 156 - - F -	20	15	3	30	36	6	8	8	3	F
CWR16J - 226 - - G -	20	22	4	40	48	8	10	10	2.5	G
CWR16J - 336 - - H -	20	33	6	60	72	8	10	10	0.9	H
CWR16J - 476 - - H -	20	47	10	100	120	8	10	10	0.9	H

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE I. Style CWR16 characteristics - Continued.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR16K - 474 - - A -	25	0.47	1	10	12	6	8	8	15	A
CWR16K - 105 - - B -	25	1	1	10	12	6	8	8	10	B
CWR16K - 225 - - D -	25	2.2	1	10	12	6	8	8	6	D
CWR16K - 335 - - E -	25	3.3	1	10	12	6	8	8	4	E
CWR16K - 685 - - F -	25	6.8	2	20	24	6	8	8	3	F
CWR16K - 156 - - G -	25	15	4	40	48	6	8	8	1.4	G
CWR16K - 226 - - G -	25	22	6	60	72	6	8	8	1.4	G
CWR16K - 226 - - H -	25	22	6	60	72	6	8	8	0.9	H
CWR16K - 336 - - H -	25	33	10	100	120	8	10	10	0.9	H
CWR16M - 334 - - A -	35	0.33	1	10	12	6	8	8	22	A
CWR16M - 685 - - G -	35	6.8	3	30	36	6	8	8	1.5	G
CWR16M - 106 - - H -	35	10	4	40	48	8	10	10	0.9	H
CWR16M - 156 - - H -	35	15	6	60	72	6	8	8	0.9	H

1/ Complete PIN shall include additional symbols to indicate capacitance tolerance, product level designator, and surge current option letter. If surge current is not required, the last " - " shall be replaced with the letter Z.

TABLE II. Style CWR26 characteristics.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR26C - 225 - - A -	4	2.2	1	10	12	6	8	8	4	A
CWR26C - 335 - - A -	4	3.3	1	10	12	6	8	8	6	A
CWR26C - 475 - - A -	4	4.7	1	10	12	6	8	8	6	A
CWR26C - 475 - - B -	4	4.7	1	10	12	6	8	8	3.2	B
CWR26C - 685 - - A -	4	6.8	1	10	12	6	8	8	6	A
CWR26C - 106 - - B -	4	10	1	10	12	8	10	10	3.2	B
CWR26C - 106 - - D -	4	10	1	10	12	8	8	10	1.3	D
CWR26C - 156 - - B -	4	15	1	10	12	8	10	10	3.2	B
CWR26C - 156 - - E -	4	15	1	10	12	8	10	12	1	E
CWR26C - 226 - - B -	4	22	1	10	12	8	10	10	3.2	B
CWR26C - 226 - - D -	4	22	1	10	12	8	10	12	1.3	D
CWR26C - 336 - - D -	4	33	2	20	24	8	10	12	1.3	D
CWR26C - 336 - - E -	4	33	2	20	24	8	10	12	0.9	E
CWR26C - 476 - - E -	4	47	2	20	24	8	10	12	0.9	E
CWR26C - 686 - - E -	4	68	3	30	36	8	10	12	0.9	E
CWR26C - 107 - - F -	4	100	4	40	48	10	12	12	0.550	F
CWR26C - 157 - - G -	4	150	6	60	72	10	12	12	0.250	G
CWR26C - 227 - - H -	4	220	8	80	96	10	12	12	0.200	H
CWR26C - 337 - - H -	4	330	10	100	120	10	12	12	0.180	H
CWR26D - 155 - - A -	6	1.5	1	10	12	6	8	8	4	A
CWR26D - 335 - - A -	6	3.3	1	10	12	6	8	8	6	A
CWR26D - 335 - - B -	6	3.3	1	10	12	6	8	8	3.2	B
CWR26D - 475 - - A -	6	4.7	1	10	12	6	8	8	6	A
CWR26D - 475 - - C -	6	4.7	1	10	12	6	8	8	2.2	C
CWR26D - 685 - - B -	6	6.8	1	10	12	6	8	8	3.2	B
CWR26D - 685 - - D -	6	6.8	1	10	12	6	8	8	1.5	D
CWR26D - 106 - - B -	6	10	1	10	12	6	8	8	3.2	B
CWR26D - 106 - - E -	6	10	1	10	12	8	10	12	1	E
CWR26D - 156 - - B -	6	15	1	10	12	8	10	10	3.2	B
CWR26D - 156 - - D -	6	15	1	10	12	8	10	12	1.7	D
CWR26D - 156 - - E -	6	15	1	10	12	8	10	12	0.9	E

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE II. Style CWR26 characteristics - Continued.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR26D - 226 - - D -	6	22	1	10	12	6	8	8	1.7	D
CWR26D - 226 - - E -	6	22	2	20	24	8	10	12	1	E
CWR26D - 226 - - F -	6	22	2	20	24	8	10	12	0.6	F
CWR26D - 336 - - E -	6	33	2	20	24	6	8	8	1	E
CWR26D - 476 - - F -	6	47	3	30	36	8	10	12	1	F
CWR26D - 476 - - G -	6	47	3	30	36	10	12	12	0.275	G
CWR26D - 686 - - F -	6	68	4	40	48	10	12	12	0.400	F
CWR26D - 686 - - G -	6	68	4	40	48	10	12	12	0.250	G
CWR26D - 686 - - H -	6	68	4	40	48	10	12	12	0.180	H
CWR26D - 107 - - G -	6	100	6	60	72	10	12	12	0.275	G
CWR26D - 157 - - G -	6	150	10	100	120	10	12	12	0.275	G
CWR26D - 227 - - H -	6	220	10	100	120	10	12	12	0.180	H
CWR26D - 337 - - H -	6	330	20	200	240	10	12	12	0.180	H
CWR26F - 105 - - A -	10	1	1	10	12	6	8	8	5	A
CWR26F - 225 - - A -	10	2.2	1	10	12	6	8	8	6	A
CWR26F - 225 - - B -	10	2.2	1	10	12	6	8	8	3.2	B
CWR26F - 335 - - A -	10	3.3	1	10	12	6	8	8	6	A
CWR26F - 335 - - C -	10	3.3	1	10	12	6	8	8	2.2	C
CWR26F - 475 - - B -	10	4.7	1	10	12	6	8	8	3.2	B
CWR26F - 475 - - C -	10	4.7	1	10	12	6	8	8	2.2	C
CWR26F - 475 - - D -	10	4.7	1	10	12	6	8	8	1.5	D
CWR26F - 685 - - B -	10	6.8	1	10	12	6	8	8	3.2	B
CWR26F - 685 - - C -	10	6.8	1	10	12	6	8	8	2.2	C
CWR26F - 685 - - D -	10	6.8	1	10	12	6	8	8	1.7	D
CWR26F - 685 - - E -	10	6.8	1	10	12	6	8	8	1	E
CWR26F - 106 - - B -	10	10	1	10	12	8	10	10	3.2	B
CWR26F - 106 - - C -	10	10	1	10	12	6	8	8	2.2	C
CWR26F - 106 - - D -	10	10	1	10	12	6	8	8	1.3	D
CWR26F - 106 - - E -	10	10	1	10	12	6	8	8	1	E
CWR26F - 156 - - D -	10	15	1	10	12	6	8	8	1.7	D
CWR26F - 156 - - E -	10	15	2	20	24	8	10	10	0.9	E
CWR26F - 156 - - F -	10	15	2	20	24	8	10	10	0.7	F
CWR26F - 226 - - E -	10	22	3	30	36	8	10	10	0.6	E
CWR26F - 336 - - F -	10	33	3	30	36	8	10	10	0.4	F
CWR26F - 336 - - G -	10	33	3	30	36	10	12	12	0.275	G
CWR26F - 476 - - F -	10	47	4	40	48	10	12	12	0.4	F
CWR26F - 476 - - G -	10	47	4	40	48	10	12	12	0.250	G
CWR26F - 476 - - H -	10	47	5	50	60	10	12	12	0.180	H
CWR26F - 686 - - G -	10	68	6	60	72	10	12	12	0.275	G
CWR26F - 107 - - G -	10	100	10	100	120	10	12	12	0.275	G
CWR26F - 107 - - H -	10	100	10	100	120	10	12	12	0.180	H
CWR26F - 157 - - H -	10	150	15	150	180	10	12	12	0.180	H
CWR26F - 227 - - H -	10	220	20	200	240	10	12	12	0.180	H
CWR26H - 684 - - A -	15	0.68	1	10	12	6	8	8	6	A
CWR26H - 105 - - A -	15	1	1	10	12	6	8	8	7.5	A
CWR26H - 155 - - A -	15	1.5	1	10	12	6	8	8	7.5	A
CWR26H - 155 - - B -	15	1.5	1	10	12	6	8	8	3.2	B
CWR26H - 225 - - A -	15	2.2	1	10	12	6	8	8	7.5	A
CWR26H - 225 - - C	15	2.2	1	10	12	6	8	8	2.2	C
CWR26H - 335 - - B -	15	3.3	1	10	12	6	8	8	3.6	B
CWR26H - 335 - - D -	15	3.3	1	10	12	6	8	8	1.7	D
CWR26H - 475 - - B -	15	4.7	1	10	12	6	8	8	2	B
CWR26H - 475 - - C -	15	4.7	1	10	12	6	8	8	2.2	C
CWR26H - 475 - - D -	15	4.7	1	10	12	6	8	8	2	D
CWR26H - 475 - - E -	15	4.7	1	10	12	6	8	8	1.2	E
CWR26H - 685 - - D -	15	6.8	1	10	12	6	8	8	2	D

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE II. Style CWR26 characteristics - Continued.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR26H - 685 - - E -	15	6.8	1	10	12	8	10	12	0.9	E
CWR26H - 106 - - D -	15	10	2	20	24	6	8	8	2	D
CWR26H - 106 - - E -	15	10	2	20	24	6	8	8	1.2	E
CWR26H - 106 - - F -	15	10	2	20	24	6	8	8	0.667	F
CWR26H - 156 - - E -	15	15	2	20	24	6	8	8	1.2	E
CWR26H - 156 - - F -	15	15	2	20	24	8	10	10	0.8	F
CWR26H - 226 - - F -	15	22	3	30	36	8	10	10	0.8	F
CWR26H - 226 - - G -	15	22	4	40	48	6	8	8	0.275	G
CWR26H - 336 - - F -	15	33	5	50	60	6	8	8	0.8	F
CWR26H - 336 - - G -	15	33	6	60	72	8	10	10	0.275	G
CWR26H - 336 - - H -	15	33	5	50	60	8	8	10	0.18	H
CWR26H - 476 - - G -	15	47	10	100	120	8	10	10	0.275	G
CWR26H - 476 - - H -	15	47	10	100	120	8	10	10	0.180	H
CWR26H - 686 - - G -	15	68	10	100	120	8	10	10	0.275	G
CWR26H - 686 - - H -	15	68	10	100	120	8	10	10	0.180	H
CWR26H - 107 - - H -	15	100	15	150	180	10	12	12	0.180	H
CWR26J - 474 - - A -	20	0.47	1	10	12	8	8	10	7.5	A
CWR26J - 684 - - A -	20	0.68	1	10	12	6	8	8	7.5	A
CWR26J - 684 - - B -	20	0.68	1	10	12	6	8	8	5.6	B
CWR26J - 105 - - A -	20	1	1	10	12	6	8	8	7.5	A
CWR26J - 105 - - B -	20	1	1	10	12	6	8	8	4.8	B
CWR26J - 155 - - B -	20	1.5	1	10	12	6	8	8	3.6	B
CWR26J - 155 - - C -	20	1.5	1	10	12	6	8	8	2.4	C
CWR26J - 225 - - B -	20	2.2	1	10	12	6	8	8	3.6	B
CWR26J - 225 - - D -	20	2.2	1	10	12	6	8	8	1.7	D
CWR26J - 335 - - D -	20	3.3	1	10	12	6	8	8	2	D
CWR26J - 335 - - E -	20	3.3	1	10	12	6	8	8	1.2	E
CWR26J - 475 - - E -	20	4.7	1	10	12	6	8	8	1.7	E
CWR26J - 685 - - E -	20	6.8	2	20	24	6	8	8	1.5	E
CWR26J - 685 - - F -	20	6.8	2	20	24	6	8	8	0.7	F
CWR26J - 106 - - E -	20	10	2	20	24	6	8	8	1.5	E
CWR26J - 106 - - F -	20	10	2	20	24	6	8	8	0.8	F
CWR26J - 156 - - F -	20	15	3	30	36	6	8	8	0.8	F
CWR26J - 156 - - G -	20	15	3	30	36	6	8	8	0.275	G
CWR26J - 226 - - G -	20	22	4	40	48	6	8	8	0.625	G
CWR26J - 226 - - H -	20	22	4	40	48	6	8	8	0.180	H
CWR26J - 336 - - H -	20	33	6	60	72	8	10	10	0.180	H
CWR26J - 476 - - H -	20	47	10	100	120	8	10	10	0.180	H
CWR26K - 334 - - A -	25	0.33	1	10	12	6	8	8	7.5	A
CWR26K - 474 - - A -	25	0.47	1	10	12	6	8	8	7.5	A
CWR26K - 684 - - B -	25	0.68	1	10	12	6	8	8	4	B
CWR26K - 105 - - B -	25	1	1	10	12	6	8	8	4	B
CWR26K - 105 - - C -	25	1	1	10	12	6	8	8	2.6	C
CWR26K - 155 - - D -	25	1.5	1	10	12	6	8	8	1.7	D
CWR26K - 225 - - D -	25	2.2	1	10	12	6	8	8	2	D
CWR26K - 225 - - E -	25	2.2	1	10	12	6	8	8	1	E
CWR26K - 335 - - E -	25	3.3	1	10	12	6	8	8	1.2	E
CWR26K - 475 - - F -	25	4.7	2	20	24	6	8	8	0.700	F
CWR26K - 685 - - F -	25	6.8	2	20	24	6	8	8	0.800	F
CWR26K - 685 - - G -	25	6.8	2	20	24	6	8	8	0.300	G
CWR26K - 106 - - G -	25	10	3	30	36	6	8	8	0.350	G
CWR26K - 156 - - G -	25	15	4	40	48	6	8	8	0.350	G
CWR26K - 156 - - H -	25	15	4	40	48	6	8	8	0.200	H
CWR26K - 226 - - G -	25	22	6	60	72	6	8	8	0.350	G
CWR26K - 226 - - H -	25	22	6	60	72	6	8	8	0.180	H
CWR26K - 336 - - H -	25	33	10	100	120	8	10	10	0.180	H

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.

TABLE II. Style CWR26 characteristics - Continued.

Part or identifying number (PIN) 1/	DC rated voltage (+85°C) (Volts)	Cap. (nom) (µF)	DC Leakage (max) (µA)			Dissipation factor (max) (percent)			Max ESR 100 kHz +25°C (Ohms)	Case size
			+25°C	+85°C	+125°C	+25°C	+85°C +125°C	-55°C		
CWR26M - 224 - - A -	35	0.22	1	10	12	6	8	8	12	A
CWR26M - 334 - - A -	35	0.33	1	10	12	6	8	8	12	A
CWR26M - 474 - - B -	35	0.47	1	10	12	6	8	8	6.8	B
CWR26M - 684 - - C -	35	0.68	1	10	12	6	8	8	4	C
CWR26M - 105 - - D -	35	1	1	10	12	6	8	8	2.2	D
CWR26M - 155 - - E -	35	1.5	1	10	12	6	8	8	1.3	E
CWR26M - 335 - - F -	35	3.3	1	10	12	6	8	8	0.700	F
CWR26M - 475 - - G -	35	4.7	2	20	24	6	8	8	0.375	G
CWR26M - 685 - - G -	35	6.8	3	30	36	6	8	8	0.375	G
CWR26M - 685 - - H -	35	6.8	3	30	36	6	8	8	0.500	H
CWR26M - 106 - - H -	35	10	4	40	48	8	10	10	0.500	H
CWR26M - 156 - - H -	35	15	4	40	48	8	10	10	0.500	H
CWR26M - 104 - - A -	50	0.1	1	10	12	6	8	8	12	A
CWR26M - 154 - - A -	50	0.15	1	10	12	6	8	8	12	A
CWR26M - 224 - - B -	50	0.22	1	10	12	6	8	8	6.8	B
CWR26M - 334 - - B -	50	0.33	1	10	12	6	8	8	4.8	B
CWR26M - 474 - - C -	50	0.47	1	10	12	6	8	8	3.2	C
CWR26M - 684 - - D -	50	0.68	1	10	12	6	8	8	2.3	D
CWR26M - 105 - - E -	50	1	1	10	12	6	8	8	1.7	E
CWR26M - 155 - - F -	50	1.5	1	10	12	6	8	8	1.1	F
CWR26M - 225 - - F -	50	2.2	2	20	24	6	8	8	0.700	F
CWR26M - 335 - - G -	50	3.3	2	20	24	6	8	8	0.500	G
CWR26M - 475 - - H -	50	4.7	3	30	36	6	8	8	0.500	H

1/ Complete PIN shall include additional symbols to indicate capacitance tolerance, product level designator, and surge current option letter. If surge current is not required, the last " - " shall be replaced with the letter Z.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC
Other - NA

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5910-2017-004)

Review activities:
Army - AR, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:17Z
Check the source to verify that this is the current version before use.