MILITARY SPECIFICATION

PLOTTER MK 19 MODS 0 THROUGH 8

This specification is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification establishes the requirements for the procurement of Plotter Mk 19 Mods 0 through 8, NAVSEA LD'S 632201 through 632209.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on the date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

MMM-A-1617	Adhesive, Rubber Base, General Purpose
PPP-B-621	Boxes, Wood, Nailed

MILITARY

MIL-P-116	Preservation-packaging, Methods of
MIL-S-901	Shock Tests, H. I. (High-Impact) Shipboard Machinery, Equipment and Systems, Requirements for
MIL-W-10434	Window, Observation
MIL-G-12803	Gasket Material, Non-metallic
MIL-C-25050	Color, Aeronautical Lights and Lighting Equipment, General Requirements for

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer, Naval Ordnance Station, Standardization Division (Code 611), Indian Head, Maryland 20640 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 1260

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-101	Preservation, Packaging and Packing Material, Test Procedures

MILITARY

MIL-STD-108	Definitions of and Basic Requirements for Enclosures for Electric and Electronic Equipment
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-167-1	Mechanical Vibrations of Shipboard Equipment (Type I - Environmental and Type II - Internally Excited)
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-740	Airborne and Structureborne Noise Measurements and Acceptance Criteria of Shipboard Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-1399 Section 103	Interface Standard for Shipboard Systems: Electric Power, Alternating Current
MS-20003	Indicator, Humidity, Card, Three Spot, Impregnated Areas (Colbaltous Chloride)

DRAWINGS

NAVAL SEA SYSTEMS COMMAND (Code Ident. 10001)

LD 630129	Test Set, Plotter Mk 19 Mods 0 through 8
LD 632201	Plotter Mk 19 Mod 0
LD 632202	Plotter Mk 19 Mod 1
LD 632203	Plotter Mk 19 Mod 2
LD 632204	Plotter Mk 19 Mod 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

LD 632205	Plotter Mk 19 Mod 4
LD 632206	Plotter Mk 19 Mod 5
LD 632207	Plotter Mk 19 Mod 6
LD 632208	Plotter Mk 19 Mod 7
LD 632209	Plotter Mk 19 Mod 8
Dwg 2094190	Machine Plotting, Specification Control Drawing
Dwg 2142075	Pack and Packaging, Plotter Mk 19 Mods 0 through 8

PUBLICATIONS

NAVAL SEA SYSTEMS COMMAND (Code Ident. 10001)

OAP-23405	Plotter, Mk 19 Mods 0 through 8, Quality Assurance Provisions

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated the issue in effect on date of invitation for bids or request for proposals shall apply.

NATIONAL BUREAU OF STANDARDS

Handbook H26	Screw Thread Standards for Federal Services

(Applications for copies should be addressed to the Superintendent of Documents, Government Printing Office , Washington, DC 20402.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Traffic Department, 1616 P Street, Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

3.3.12 Overtravel lamp. Overtravel lamp shall light when electrical limit switches are actuated.

3.3.13 Mark lamp. Mark lamp shall light when energized externally.

* 3.3.14 Dark adaption. The plotter shall be dark adapted. Controls, switches and dials shall be illuminated by instrument and panel lighting red light in accordance with Type I (f) of MIL-C-25050. A filter and ordinary light source may be used. Colored bulbs shall not be used. With the covers opened, illumination at full brightness, a red filter inserted into projector light path, and with the mark light energized, no white light shall be visible. The four blown-fuse indicators need not be dark adapted.

3.3.15 Dielectric strength. The plotter shall be capable of withstanding a dielectric strength test of 350 volts alternating current (Vac) for 60 s.

3.3.16 Insulation resistance. The plotter shall be capable of withstanding the insulation resistance tests and shall demonstrate a minimum insulation resistance of 3.0 megohms.

3.3.17 Power system variations. The plotter shall operate satisfactorily with power system variations as prescribed in 4.5.6.

3.3.18 Mechanical noise. The plotter shall pass the mechanical noise tests [illegible] 4.5.7.

3.3.19 Radio frequency and low-frequency noise interference. The plotter shall pass the radio frequency and low-frequency noise interference tests prescribed in 4.5.8.

3.3.20 Endurance. The plotter shall be capable of withstanding the endurance test prescribed in 4.5.10.

3.3.21 Tracking scale selector levers. Tracking scale selector levers shall move freely between all tracking scales from stop to stop in both clockwise and counterclockwise directions.

3.3.22 Extraneous images. No extraneous images or undesired flare light from either the "X" or arrowhead projections shall be visible on the plotting surface when unit is viewed under dark conditions.

3.3.23 Manual input handcranks. In all modes and tracking scales, rotation of the manual input handcranks shall position the optical head without slippage or lost motion.

3.4 Environmental requirements.

3.4.1 Drip test. The plotter shall show no entry of water and shall meet the performance and other requirements of this specification after being subjected to the drip test specified in 4.5.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

3.4.2 Inclination. The plotter shall withstand the inclination tests of 4.5.2.

3.4.3 Vibration.

* 3.4.3.1 Vibration (repetitive shock) test. The plotter, after meeting the requirements of Section 3, shall be packaged and packed in accordance with Section 5 and subjected to the test specified in 4.5.3.1. Upon conclusion of the test, the item shall be inspected and shall be still capable of meeting the performance and other requirements of this specification.

3.4.3.2 Vibration, operating. The plotter, less pack and packaging, shall withstand the vibration tests specified in 4.5.3.2. During and after the tests, the plotter shall show no damage and shall meet the performance and other requirements of this specification.

3.4.4 Shock.

* 3.4.4.1 Drop test (free fall). The plotter, after meeting all the requirements of Section 3, shall be packaged and packed in accordance with Section 5 and subjected to the test specified in 4.5.4.1. Upon conclusion of the test, the item shall be inspected and shall be still capable of meeting the performance and other requirements of this specification.

3.4.4.2 Shock, operation. The plotter, less pack and packaging, shall withstand the shock tests as specified in 4.5.4.2. After the tests, the plotter shall show no damage and shall meet the performance and other requirements of this specification.

3.4.5 Climatic conditions. The plotter shall withstand the climatic conditions specified in 4.5.5 and thereafter shall show no corrosion or damage and shall meet performance and other requirements of this specification.

* 3.4.6 Humidity and fungus. The plotter shall be resistant to humidity and fungus when tested as specified in 4.5.9 and thereafter shall show no corrosion or damage and shall meet the performance and other requirements of this specification.

3.5 Cleanup. Prior to and after final assembly, all parts, components, and the assembly shall be thoroughly cleaned of loose, spattered, or excess solder, metal chips, excess flux, and other foreign matter. Burrs and sharp edges as well as resin flash shall be removed.

* 3.6 Workmanship. The plotter, including all parts and accessories, shall be constructed and finished in a manner to ensure compliance with all requirements of this specification. Particular attention shall be paid to neatness and thoroughness of soldering, wiring, impregnation of coils, marking of parts and assemblies, plating, painting, riveting, machine screw assemblage, welding, brazing, and freedom of parts from

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:38Z
Check the source to verify that this is the currentversion before use.

burrs and sharp edges. The gearing units, servos, ball screws, and splines are precision components and require meticulous assembly. The standards of workmanship exhibited in any approved preproduction sample, subject to any qualification stated in the Government's notice of approval, shall be determinative of the requirements of the contract relative to workmanship insofar as not specifically covered by applicable specifications.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. Preproduction inspection (see 4.5)
b. Quality conformance inspection (see 4.6)
c. Periodic production inspection (see 4.5)

4.3 Inspection condition. Unless otherwise specified (see 6.2) all inspections shall be performed under the following conditions:

a. Temperature: Room ambient 18 to 32°C (65 to 90°F)
b. Altitude: Normal ground
c. Vibration: None
d. Humidity: Room ambient to 65 percent relative, maximum

4.4 Sampling.

4.4.1 Preproduction sample. A preproduction sample of two plotters, manufactured in accordance with 3.2.1, shall be subjected to the preproduction inspection detailed in 4.5 at an activity designated by the procuring activity (see 6.2). Acceptance of the preproduction sample shall be based on no defects in the sample. Further production of the plotters by the contractor, prior to approval of the preproduction sample, shall be at the contractors risk.

4.4.2 Periodic preproduction samples. When required by the contract (see 6.2), the inspections of 4.5 and 4.6 shall be performed on periodic production samples as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

Step 1. Upon initiation of production, select one unit at random from the first 10 units for submission to an activity designated by procuring agency (see 6.2).

Step 2. Upon satisfactory compliance of the unit with the inspections of 4.5 and 4.6, select one additional unit at random from each of the following groups of 50 units or less, for the remainder of the contract. Submit each of these units for inspection in accordance with 4.5 and 4.6.

Step 3. When a defective unit is found in any group, the contractor shall notify the procuring agency. Disposition of groups represented by failing samples shall be as specified by the procuring activity (see 6.2).

* 4.4.3 Lot size. Unless otherwise specified in the contract (see 6.2), each shipment of units of product shall be a separate lot and may differ from the quantity specified in the total contract. In any event, all units of a single lot shall be made to the same design, with the same materials and manufacturing techniques, and shall be part of one continous production run.

* 4.4.4 Quality conformance sampling. Each plotter to be submitted for acceptance on contract shall be inspected in accordance with 4.6. Defective units shall be rejected.

* 4.5 Preproduction and periodic production inspections. The preproduction and periodic production samples, after satisfactorily passing the quality conformance inspection detailed in 4.6, shall be subjected to the following tests and examinations. When specified in the contract (see 6.2), certified inspection data covering the results of preproduction and periodic production inspections shall be forwarded to the procuring activity. The tests of 4.5.3.1 and 4.5.4.1 shall be waived when specified in the contract (see 6.2).

4.5.1 Drip test. The plotter shall withstand drip proof tests as specified in MIL-STD-108.

4.5.2 Inclination. The plotter shall be tested for:

a. Operation in accordance with QAP-23405 while inclined at 30° in any plane.

b. Operation without damage, while energized, and inclined at 45° in any plane.

c. Rotation without damage, while deenergized, through 360° in any plane.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

4.5.3 Vibration.

4.5.3.1 Vibration (Repetitive shock) test. This test shall be run prior to running other shock tests in accordance with Method 5019 of FED-STD-101 with the following clarifications:

a. If circular input motion is used, table frequency shall be adjusted to assure that one edge of the container leaves the table on each cycle by 0.19 in.

b. If vertical linear input motion is used, all points of the container shall leave the table by 0.06 in. at some instant during each cycle.

c. If neither of the above is attainable with equipment at hand, the table shall be operated at 270 ± 2 rpm for the stipulated time period.

4.5.3.2 Vibration, operating.

a. Mounting. The plotter shall be mounted on a vibration testing machine to simulate the service installation. The plotter shall be secured to the vibration testing machine in such a manner that the direction of vibration will be along each of the principal axes separately. The plotter may be reoriented on the horizontal vibrating machine between each test, if necessary, to obtain [illegible] motion. At no time shall the unit be mounted in any other way than its normal position, i.e. vertical axis of plotter in true vertical plane.

b. Procedure. The plotter shall be energized to perform its normal functions and subjected to the Type I vibration tests of MIL-STD-167-1.

4.5.4 Shock.

4.5.4.1 Drop test (free fall). This test shall be conducted from the heights stipulated in TABLE I. The plotter, packaged and packed in accordance with Section 5, shall be dropped in succession on corners 5-1-2, 6-2-4, 5-2-3, and 6-1-4. Then drop it on face 3 and face 5 (see FIGURE 1). Suitable test rigging is described in Method 5007 of FED-STD-101.

4.5.4.2 Shock, operating.

a. Mounting. The plotter shall be attached to the anvil plate by flexible steel mounting brackets. The plotter shall be so mounted as to simulate the service installation, including shock mounts. A mounting fixture similar to that described as Fixture 4-C under Methods of Mounting, Lightweight Equipment in MIL-S-901, shall be used.

Source: https://assist.dla.mil -- Downloaded: 20261O-19T16:38Z
Check the source to verify that this is the current version before use.

b. Procedure. The plotter shall be energized to perform its normal function in the operating condition and shall be subjected to the following test. If it is found necessary to repair any damage severe enough to consitiute a failure of the test equipment, the entire test shall be repeated, unless otherwise directed by the procuring activity.

c. Shock test. The shock test shall be conducted, using the shock testing machine of Figure 1 of MIL-S-901. The shock test shall consist of six blows, applied in three groups of two blows each, on each of the three plotter axes. The height of the hammer drop shall be one foot for the first blow and three feet for the second blow. At the conclusion of this test, the plotter shall be tested to verify conformance to the performance and other requirements of this specification. Disposition of the test results shall be at the discretion of the procuring activity.

4.5.5 Climatic conditions. The plotter shall be tested for operation, in accordance with QAP-23405, at the ambient temperatures and conditions and cold weather operation conditions as specified herein. When separate high-temperature chambers are not available, it is permissible to perform the hot and cold tests in the same chamber by raising the ambient air temperature from the low to the high temperature as specified in 4.5.5.2.

4.5.5.1 Cold test. The plotter shall be chilled to 0°F with power off and covers closed. When the air temperature inside the unit has dropped to within 5° of the specified minimum temperature, the unit shall be allowed to stand for a minimum period of 10 hours (h). The power supply shall then be turned on and the unit allowed to stand in a ready condition, but not operated, for 2 h. The plotter shall then be tested for satisfactory operation in accordance with QAP-23405.

4.5.5.2 Hot test. After the test precribed in 4.5.5.1, the ambient air temperature shall be raised to +110°F with relative humidity between 95 and 98%, the plotter covers closed, and the unit energized in a ready condition. The ambient air temperature rise shall not exceed 10°F/h. The plotter shall operate continuously for a minimum period of 50 h under the aforementioned conditions, and then be tested in accordance with QAP-23405 under these same conditions.

4.5.6 Power system variations. The plotter shall be tested for satisfactory operation in accordance with QAP-23405 under power system variations as specified for a Type I ac power source in accordance with Section 103 of MIL-STD-1399. This test may be run during the performance of any or all of the tests given in 4.5.1 to 4.5.5, inclusive, at the direction of the testing agency, or as directed by the procuring activity.

4.5.7 Mechanical noise. The plotter shall be tested in accordance with test procedures described in MIL-STD-740. The Airborne Noise Requirements for Grade A Equipment and the Structureborne Noise Requirements for Type 3 Equipment shall be met.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:38Z
Check the source to verify that this is the currentversion before use.

TABLE I. Shipping container shock test selector.

Container Gross Wt. W, lbs./1	Container Length, L, Ins. /1	Type Test	Domestic only /2 Ht. of Drop in.	Domestic only /2 Impact Velocity ft/s	Universal Ht. of Drop in.	Universal Impact Velocity ft/s
W≤25	Any	Free drop	30	N.R./3	48	N.R.
25<W≤50	L≤36	Free Drop	30	N.R.	36	N.R.
25<W≤50	L>36	Rotation & Impact	30	7	36	12-1/2
50<W≤150	L≤36	Free Drop	14	N.R.	30	N.R.
50<W≤150	L>36	Rotation & Impact	27	7	30	10
150<W≤500	Any	Rotation & Impact	18	7	24	10
500<W≤4000	Any	Rotation & Impact	12	7	18	10
W>4000	Any	Rotation & Impact	9	7	12	10

/1 Use both columns to determine the applicable test conditions.

/2 This column may not be used if the contents are AEDA. Containers for AEDA developed under direct military control shall be designed and tested to the universal level. Bulk materials and commercially developed AEDA must be shipped in containers meeting DOT regulations, including all performance test requirements, unless specific waiver be granted by NAVSEA. Where such waiver exists, the shipper may assume that the waiver has been coordinated with appropriate regulatory agencies.

/3 N.R. means not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

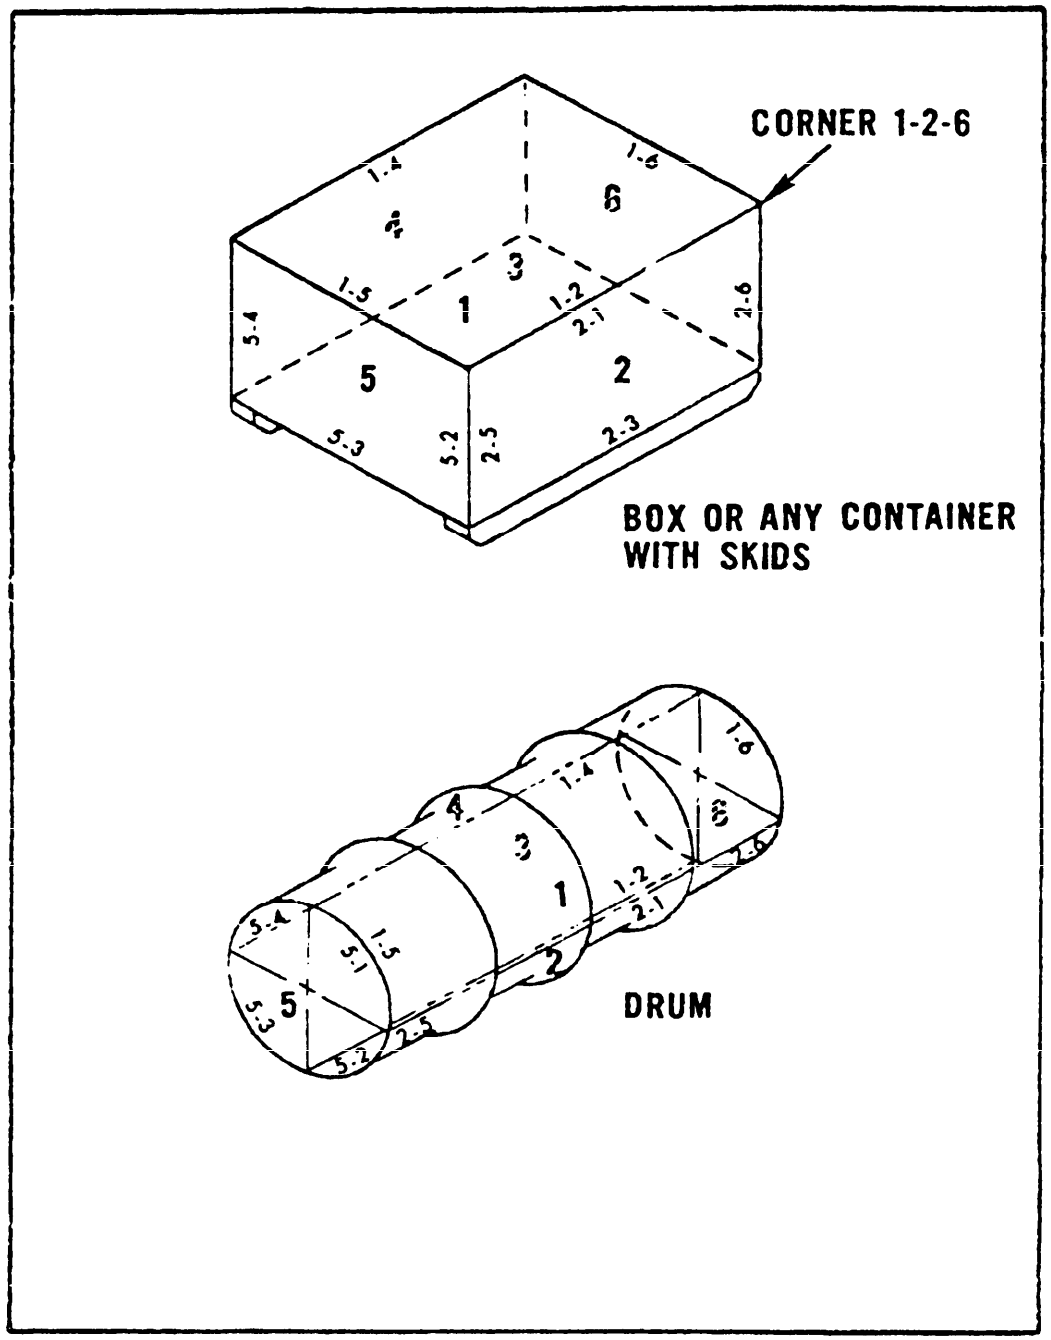


FIGURE 1. Definition of Faces, Edges, and Corners.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:38Z
Check the source to verify that this is the current version before use.

4.5.8 Radio frequency and low-frequency. The plotter shall be tested for radio frequency and low-frequency noise interference in accordance with the requirements of MIL-STD-461, Table II, Equipment Class II C. The maximum-radiated and the maximum-conducted noise interference and electrical disturbance shall not exceed the values given in MIL-STD-461.

* 4.5.9 Humidity and fungus.

a. The plotter shall be tested in accordance with Method 507, Procedure IV of MIL-STD-810 for resistance to humidity and fungus.

b. Upon completion of the humidity and fungus tests, the plotter shall be removed from the exposure chamber and operated for 24 h. The unit shall then pass the dielectric and insulation resistance tests specified in QAP-23405.

4.5.10 Endurance. After completion of all other preproduction and periodic production tests, the plotter shall be operated and periodically tested for satisfactory operation in accordance with QAP-23405 until a total of 750 h of operating time has elapsed (including operating time elapsed during the performance of the tests described in 4.5.1 through 4.5.9). Test conditions during the endurance test may be any condition, or combination of conditions of inclination, ambient temperature, humidity, and power system variations that are specified in the other environmental tests. Operating time shall be considered as time during which the plotter is actually performing its intended use, and does not include time during which the plotter is in "ready" or "standby" condition.

* 4.6 Quality conformance inspection. The quality conformance inspection shall consist of the following tests and examinations performed on each plotter as specified in 4.4.4. The contractor shall record the results of the quality conformance inspection on QAP-23405 and furnish a duplicate copy with each plotter shipped as specified in the contract (see 6.2).

4.6.1 Quality conformance inspection equipment, and facilities. Unless otherwise specified in the contract (see 6.2), the contractor shall furnish and maintain all necessary inspection equipment and facilities and shall provide personnel for performing all quality conformance tests and examinations. The inspection equipment shall be as specified in 4.6.2 and shall meet the requirements of the applicable LD's and referenced drawings. When definite requirements are not specified, the equipment shall be of sufficient accuracy and quality to permit performance of the required quality conformance tests and examinations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

* 4.6.2 Inspection equipment. The following items of inspection equipment are required to perform the quality conformance tests and examinations set forth in 4.6.3 and 4.6.4.

a. Test Set, Plotter Mk 19 Mods 0 through 8, LD 630129.

b. Megger, 500 V, ARI Model 2850, or equivalent.

c. High Potential Tester, 1000 Vrms, ARI Model 411, or equivalent.

d. Volt-Ohmmeter, 150 V range ±1% accuracy and ohm reading accuracy of ±5%, Simpson Model 260, or equivalent.

e. Vacuum Tube Voltmeter, 0.01 resolution with 3% accuracy, Hewlett-Packard Model 400 H, or equivalent.

f. Stopwatch, 0.1 s graduations, Minerva Model 140L, or equivalent.

g. Oscilloscope, 1 V/cm reading minimum ±5% accuracy, Tektronix Model 453, or equivalent.

h. An accurate 36-in. rule, graduated in 100ths.

i. Beam Compass, 24-in.

j. AC Power Supply, 115 V ±5%, 400 Hz, Invertron Model 350, or equivalent.

k. Counter-Timer, 10 gate frequency mode, Anadex Model CF 250, or equivalent.

4.6.3 Quality conformance tests. The plotter shall be energized with 115 V ±10%, 400 Hz ±10%, single phase, and subjected to all tests specified in QAP-23405.

4.6.4 Quality conformance examination. Each plotter shall be visually examined to determine conformance with the requirements for workmanship and dimensions.

4.6.5 Packaging, packing, and marking. The packaging, packing, and marking shall be examined to verify conformance with the requirements of Section 5.

5. PACKAGING

5.1 Preservation and packaging. The preservation and packaging shall be Level A or C as specified in the contract (see 6.2).

5.1.1 Level A Unit packaging. The plotter shall be individually packaged, conforming to the requirements of MIL-P-116, Submethod II-a with a Class 1

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:38Z
Check the source to verify that this is the currentversion before use.

window as specified in MIL-W-10434. All moveable parts shall be secured and blocked to prevent movement prior to packaging. The Submethod II-a package shall contain a humidity indicator conforming to MS 20003. Adhesive used shall conform to Type I of MMM-A-1617 and gasket material shall conform to Type II of MIL-G-12803.

5.1.2 Level C unit packaging. The plotter shall be individually packaged in accordance with the manufacturer's commercial practice. The packaging shall be adequate to afford protection from deterioration and physical damage during direct shipment from the source of supply and the first receiving facility for immediate use.

5.2 Packing. Packing shall be Level A or C as specified in the contract (see 6.2).

5.2.1 Level A. The plotter, packaged as defined in 5.1.1 shall be individually packed in an overseas-type wood box conforming to PPP-B-621, Class 2, Style 2, Type 3. The plotter shall be cushioned, blocked, and braced to ensure adequate protection during shipment, multiple handling, and indeterminate storage. The exterior container shall be in accordance with Dwg 2142075.

5.2.2 Level C. The plotter, when packaged as described in 5.1.2 shall be individually packed to afford protection against damage during direct shipment from supply source to the first receiving activity for immediate use. Containers shall conform to Uniform Freight Classification, National Motor Freight Classification or to rules of other carriers applicable to the mode of transportation.

* 5.3 Levels A and C cushioning. The unit package shall incorporate sufficient cushioning material, bracing, or other adequate shock absorbing devices to ensure that the plotter meets all the requirements of Section 3 after being tested in accordance with 4.5.3.1 and 4.5.4.1. At the time of packaging or packing, the moisture content of the cushioning material shall be no more than 5%.

* 5.4 Marking. In addition to any special marking required by the contract (see 6.2), each container shall be marked in accordance with MIL-STD-129, including serial numbers.

6. NOTES

6.1 Intended use. Plotter Mk 19 is intended to be used on board submarines as an electromechanical plotting device with Fire Control Systems Mk 101, 106, 112 and 133. The machine furnishes continuous visual indications of own ship motion and true target bearing, and is intended for utilization during fire control and weapon direction operations, as well as serving as an aid in ship navigation.

Source: https://assist.dla.mil -- Downloaded: 202610-19T16:38Z
Check the source to verify that this is the currentversion before use.

6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurement requirements.

a. Title, number, and date of this specification.

b. Quantity required (including preproduction and periodic production samples).

c. When a preproduction sample is required (see 3.2.1 and 6.3).

d. Inspection conditions when other than as specified (see 4.3).

e. Assigned activity for preproduction and periodic production inspections (see 4.4.1 and 4.4.2) and disposition of groups represented by failing samples (see 4.4.2).

f. That additional samples required because of failure of any unit(s) to pass the prescribed periodic production inspections shall be provided and inspected at the expense of the supplier.

g. Lot size if other than as specified (see 4.4.3).

h. When the tests of 4.5.3.1 and 4.5.4.1 shall be waived (see 4.5 and 6.4).

i. Any inspection equipment and facilities not required to be furnished by the contractor (see 4.6.1).

j. Level of packaging and packing required (see 5.1 and 5.2). The attention of the contracting officer is invited to the Quality Assurance Provisions and options in MIL-P-116 and to 4.5 of this document.

k. Any special marking required (see 5.4).

* 6.2.2 Contract data requirements. Items of deliverable data required by this specification are cited in the following paragraph herein:

Paragraph	Data Requirement	Applicable DIDs
4.5	Certified inspection data	DI-T-4902
4.6	Completed QAP-23405	UDI-E-20607

DIDs (Data Item Description/DD Forms 1664) for the above requirements will be documented in the applicable ADL (Authorized Data List). Such data will be delivered as identified on completed (numbered) DIDs when specified on DD Forms 1423 (Contract Data Requirements Lists) and incorporated into applicable contracts.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

* 6.3 Preproduction sample waiver. Preproduction samples submitted and approved on a recent contract may be accepted by the procuring activity in lieu of an additional preproduction sample inspection. When the preproduction sample is waived (see 6.2.1c) the procurement document should contain a statement specifying that the standards of workmanship exhibited by the previously approved preproduction sample shall determine the minimum requirements of the current contract.

* 6.4 Waiver of vibration (repetitive shock) and drop tests. Tests specified in 4.5.3.1 and 4.5.4.1 may be waived by the procuring activity for Level C packs only, provided the contractor guarantees safe delivery to the using activity.

* 6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - OS

Preparing activity:
Navy - OS
Project No. 1260-N013

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-P-23405B(OS) "PLOTTER MK 19 MODS 0 THROUGH 8"

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.

FOLD

Commanding Officer
Naval Ordnance Station (611)
Indian Head, MD 20640

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commanding Officer
Naval Ordnance Station (611)
Indian Head, MD 20640

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:38Z
Check the source to verify that this is the current version before use.