

MILITARY SPECIFICATION SHEET

RESOLVER, ELECTRICAL


TYPE 15R8N4a

The complete requirements for procuring the resolver described herein shall consist of this document and the issue in effect of MIL-R-23417.

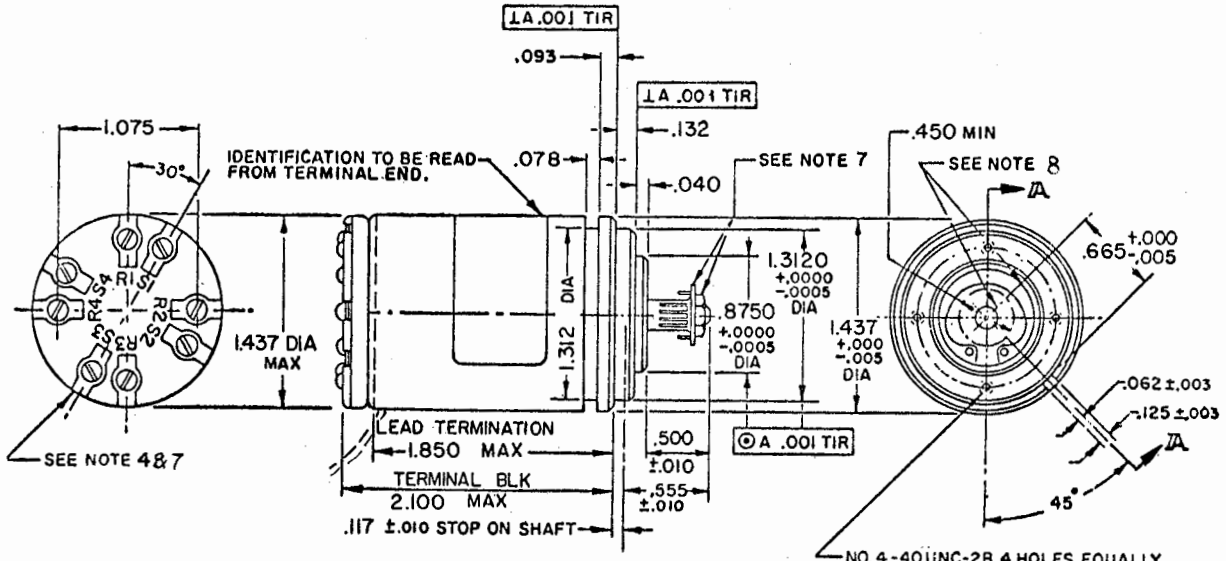




LEAD TERMINATION

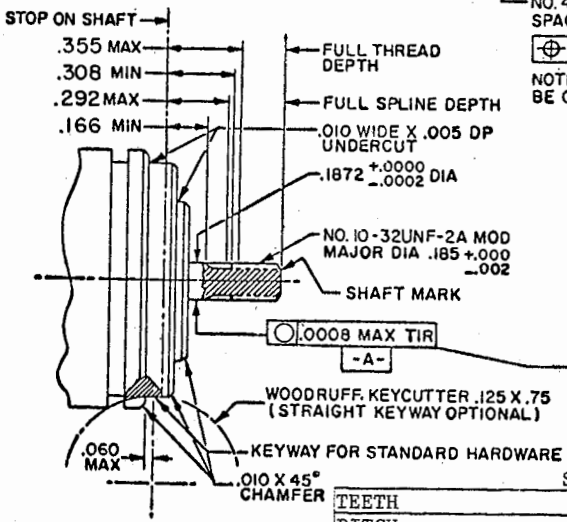

PARTIAL SECTION A-A

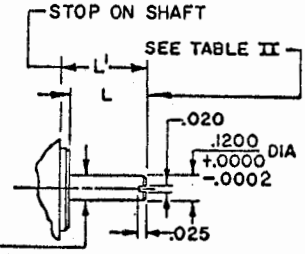

PLAIN AND SLOTTED SHAFT

SPLINE DATA	
TEETH	21
PITCH	120
PITCH DIAMETER	.175+.000-.002
OUTSIDE DIAMETER	.1872+.0000-.0005
PRESSURE ANGLE	20°
ROOT DIA. MAX	.155
TOOTH FORM	FULL DEPTH INVOLUTE

NOTE: THE END FUNCTION OF THIS SPLINE IS FOR POSITIVE ROTATIONAL FASTENINGS. IT IS NOT TO BE USED AS A GEAR. THIS SPLINE SHALL BE INSPECTED BY (SPLINE) GO COMPOSITE RING GAGE MS90406.

FSC 5990

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:41Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances on decimals are .XXX ± .005 and angles ±2°.
3. Perpendicularity and concentricity shall be measured with the unit in a vertical position supported by the shaft, then the housing rotated.
4. Terminal sequence shall be as shown and identified by molded lettering on the end cap or permanently affixed thereto. The end cap and terminal block shall be secured by screws other than the terminal screws. Mounting screw positions optional. Terminal block designed for MS17182 terminal lug. (An approved 12-terminal block may be used provided all unused terminal positions are closed.)
5. Minor variations of unit configuration are permitted for undimensioned design detail.
6. Leads shall conform to MIL-W-16878/4, type E-28.
7. The following list of hardware shall be packaged in a ventilated envelope made of material having a PH value of 6-8 and compatable with the weight of the contents. The packaged hardware shall be placed in the unit resolver package as follows:

Machine screw	(MS35275-213)	8 required (*) (**)
Lockwasher	(MS35338-135)	8 required (*) (**)
Drive washer	(MS17186-6)	1 required (*)
Nut	(MS17187-2)	1 required (*)

   (*) For units with spline shaft and terminal board termination.
   (**) For units with plain smooth shaft and terminal board termination.
   For information only: Use mounting clamp MS17183 or equal.
8. Mark on housing is to match shaft mark within 10° when rotor is set at approx. resolver zero, and will bear no relation to the center lines shown on the drawing.
9. A voltage value of .5 to 30 V shall be entered in the 'Volts' designation space on the identification plate.
10. The weight shall be attached to the end of each wire, pulling straight away from the resolver. The lead shall then be bent 90° at the point of exit from the housing and while in this attitude the resolver rotated 360° counterclockwise. Any indication of the lead pulling loose, wire strands breaking, or permanent deformation of the insulation shall be cause for rejection under qualification tests.
11. With the resolver energized under standard test conditions the resonant frequency will be recorded during qualification as that point where the output voltage has a maximum value and phase shift -90°. Low corner frequency (referenced as design information) is the point where output voltage is down 3db and phase shift 45°.
12. Pending issuance of a qualified products list (QPL) a sample of the resolvers to be furnished under this specification shall be subjected to the preproduction tests as specified in MIL-R-23417.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:41Z
Check the source to verify that this is the current version before use.

TABLE I

RESOLVER, ELECTRICAL: TYPE 15R8N4a

PERFORMANCE REQUIREMENTS AND CHARACTERISTICS

	Requirement	Value	Unit	Tolerance
1.	Excitation winding	Stator		
2.	Rated frequency	400	Hz	±1%
3.	Input voltage		volts (rms)	±1%
	Maximum	30		
	Test	10		
	Minimum	0.5		
4.	Primary current	12	milliamps	nominal
5.	Primary power	0.014	watts	nominal
6.	D. C. resistance		ohms	±15%
	Rotor	60		
	Stator	47		
7.	Impedance		ohms	R±15%+jx±10%
	Z_{RO}	113+j710		
	Z_{SO}	95+j779		
	Z_{RS}	117+j60		nominal
8.	Transformation ratio			±1%
	Output/input	0.955		
9.	Equality of transformation ratios		% spread	maximum
	Output/input	0.08		
10.	Phase shift		degrees	
	Output/input	3.5		±1
11.	Interaxis error	±5	minutes	
12.	Functional error	±0.1	%	
13.	Null voltage		mV(rms) output	maximum
	Fundamental	5.3		
	Total	9.5		
14.	Shift of resolver zero		minutes	
	With frequency	±0.05		
15.	Harmonic distortion	0.1	%	maximum
16.	Temperature rise	15	°C	maximum
17.	Friction torque	0.15	ox. - in.	maximum
	@ -55°C	0.30		
18.	Radial play	0.0005 (for reversal of 1/2 lb load)	inches	maximum
19.	End play	0.0010 (for reversal of 1 lb load)	inches	±0.0005


Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:41Z
Check the source to verify that this is the current version before use.

TABLE I (Continued)

Requirement	Value	Unit	Tolerance
20. Wirelead stress (see note 10)	2	lbs	minimum
21. Resonant frequency (see note 11)	125	kHz	minimum
22. Low corner frequency (see note 11)	24	Hz	maximum

Part number: The part number consists of the basic number of this specification sheet and a dash number taken from Table II.

Example:

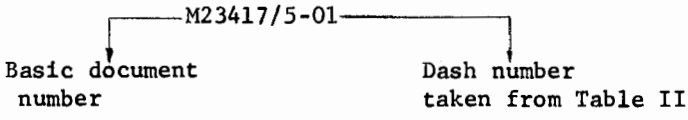

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:41Z
Check the source to verify that this is the current version before use.

TABLE II

Dash No.	Shaft diameter	Shaft Style	Termination	Shaft length	
				Free length - L (±.010)	Dim to stop on shaft - L' (±.010)
-01	.187	Spline	Terminal block	.500(1/2)	.555
-02	.120	Plain	Wire leads	.250(1/4)	.305
-03	.120	Plain	Wire leads	.437(7/16)	.492
-04	.120	Plain	Wire leads	.500(1/2)	.555
-05	.120	Plain	Terminal block	.250(1/4)	.305
-06	.120	Plain	Terminal block	.437(7/16)	.492
-07	.120	Plain	Terminal block	.500(1/2)	.555

Custodians:
Army - MU
Navy - AS
Air Force - 11

Review activities:
Army - MU, EL
Navy - AS, SH, OS
Air Force - 11, 17, 85

User activities:
Army - MU, AV, ME, AT
Navy - CG, MC
Air Force - 14, 19

Preparing Activity
Army - MU

(Project 5990-0110)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T16:41Z
Check the source to verify that this is the current version before use.