MIL-C-17841B(MC)
6 June 1966
SUPERSEDING
MIL-C-17841A(MC)
24 May 1961

MILITARY SPECIFICATION

CARRIER, CLUB, POLICEMAN'S: COTTON WEBBING; WHITE

1. SCOPE

1.1 Scope. - This specification covers requirements for one type and size policeman's club carrier made of white cotton webbing.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids, or request for proposal form a part of the specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-285	- Thread, Polyester
UU-P-268	- Paper, Kraft, Untreated, Wrapping
CCC-T-191	- Textile Test Methods
DDD-L-20	- Label; For Clothing, Equipage, And Tentage, (General Use)

MILITARY

MIL-W-530	- Webbing And Tape, Textile, Cotton, General Purpose, Natural Or In Colors
MIL-B-17757	- Boxes, Fiber, Corrugated (Modular Sizes)

STANDARDS

FEDERAL

FED. STD. NO. 751	- Stitches, Seams, And Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures And Tables For Inspection By Attributes
MIL-STD-129	- Marking For Shipment And Storage

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:38Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. - The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

UNIFORM CLASSIFICATION COMMITTEE
Uniform Freight Classification Rules

(Application for copies of the freight classification rules should be addressed to the Uniform Classification Committee, 202 Chicago Union Station, Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Sample. - Samples are furnished solely for guidance and information to the supplier (see 6.2). Variations from the specification may appear in the sample, in which case the specification shall govern.

3.2 Preproduction sample approval. - Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished carrier shall be submitted or made ready for the contracting officer or his authorized representative for inspection. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Webbing, cotton. - The webbing shall be white (bleached), 3.40-ounce, 2-1/4 inch width, conforming to type IV, class 2 of MIL-W-530.

3.3.2 Thread. - The thread shall be polyester, white, conforming to type I, class 1, number size 3, final ply 4 of V-T-285.

3.3.3 Label. - Each club carrier shall be provided with an identification label conforming to type IV, class 5 of DDD-L-20; the content shall include the "Name of contractor". The label shall show fastness to laundering.

3.4 Construction. - The construction shall conform in all respects to Figure 1 and as specified herein.

3.4.1 Stitching, machine. - All stitching shall conform to FED. STD. NO. 751, stitch type 301, 7 to 9 stitches per inch. Thread breaks in stitching shall be backstitched not less than 1 inch at each break. Stitching shall be backstitched not less than 1/2 inch at the ends, except where ends are held down by other stitching. The double and triple rows of stitching shall be made not more than 1/32 inch apart. Thread tension shall be maintained properly so that there will be no loose stitching and that the lock will be embedded in the center of the materials sewed. All thread ends shall be trimmed.

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:38Z
Check the source to verify that this is the current version before use.

3.5 Marking. - Each club carrier shall have the marking located on the inside of the carrier's belt loop.

3.6 Finished measurements. - The finished club carrier shall conform to the measurements shown in Figure 1.

3.7 Workmanship. - The finished club carrier shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. - Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any commercial laboratory acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. - When required, inspection and testing of the preproduction sample shall be a completely fabricated carrier for conformance to all provisions of this specification.

4.3 Inspection for acceptance. - Inspection shall be in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Testing of components. - The quality assurance provisions for components, except as otherwise required by this specification, shall be in accordance with the applicable specifications and standards referenced herein. Where there is a conflict in quality assurance provisions, this specification shall govern.

4.3.2 Process inspection. - Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are in accordance with requirements in the specification. Care shall be taken to see that cut component parts are of specified dimensions. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated non-conformance.

4.4 Inspection of the end item.

4.4.1 Examination of the end product. - The defects found during examination shall be classified in accordance with 4.4.1.1 and 4.4.1.2. The sample unit for these examinations shall be one finished carrier. The lots shall be inspected in accordance with paragraph 4.4.1.3.

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:38Z
Check the source to verify that this is the current version before use.

4.4.1.1 Examination of visual characteristics. -

Examine	Defect	Classification Major	Minor
Webbing	Holes, cuts or tears.	X	
	Other webbing defects, such as abrasion mark, slub, smash, broken end or pick:		
	-seriously affecting serviceability or appearance.	X	
	-affecting serviceability or appearance but not seriously.		X
	Edges frayed or scalloped; not firmly or tightly woven.	X	
Seams and stitching			
Open seams	1/2 inch or less.		X
	More than 1/2 inch.	X	
Note: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double or triple stitched seams, a seam shall be considered open when either one or both sides of a seam are open.			
Raw edges	When securely caught in stitching.		X
Note: Raw edges not securely caught in stitching shall be classified as open seams.			
Run-offs (see open seams)			
Seam and stitch types	Wrong seam or stitch type:		
	-seriously affecting serviceability.	X	
	-affecting serviceability but not seriously.		X
Stitch tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in excessive tightness of webbing on seams.		X
Stitches per inch	One to two stitches less than minimum specified.		X

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:38Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Minor
	Three or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified.		X
Note: Variation in the number of stitches per inch, caused by the operator's speeding up the machine and pulling the fabric in order to sew over heavy seams or heavy places shall be classified as follows:			
(a) Within the major defect classification - Minor defect			
(b) Within the minor defect classification - No defect			
Stitching margin; stitching gage	Not as specified, affecting serviceability or appearance.		X
Stitching ends	Backstitched less than 1/2 inch.		X
Thread breaks	Backstitched less than 1 inch.		X
Note: Thread breaks not backstitched shall be classified as open seams.			
Components and assembly	Any imperfection of component or fabrication which will:		
	-seriously affect serviceability or appearance.	X	
	-affect serviceability or appearance, but not seriously.		X
	Any required component or part of carrier omitted.	X	
	Any required row of stitching omitted.	X	
	Needle chews.	X	
	Mends or darns.	X	
Cleanness	Spots or stains clearly noticeable:		
	-seriously affecting serviceability or appearance.	X	
	-affecting serviceability or appearance, but not seriously.		X
	Thread ends not trimmed throughout.		X

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:38Z
Check the source to verify that this is the currentversion before use.

4.4.1.2 Examination for dimensional characteristics. -

Examine	Defect
Length of carrier and loop (flat length)	Under or over specified tolerances.
Location of stitching	Not as specified.

4.4.1.3 Inspection levels and acceptable quality levels. - The inspection levels and acceptable quality levels (expressed in defects per hundred units) shall be as follows:

Examination	Inspection level	AQL
Paragraph 4.4.1.1, visual characteristics	II	Major - 2.5 Total - 6.5
Paragraph 4.4.1.2, dimensional characteristics	S-3	One class - 6.5

4.4.1.4 Examination of preparation for delivery. - An examination will be made to determine that packaging, packing and marking, as required by section 5 of this specification, are complied with. Defects will be scored in accordance with the table below. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per 100 units.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any nonconforming component; component missing, damaged, or otherwise defective, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, etc.
	Bulging or distortion of containers.
Weight or content (exterior and interior)	Number per container is more or less than required; gross/net weight exceeds requirement.

4.5 Tests. - The methods of testing specified in CCC-T-191, wherever applicable, shall be followed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:38Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. - Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. - Carriers shall be individually packaged in a polyethylene bag approximately 9 inches in length and 5 inches in width, with a 1 inch lip at the open 5-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. The open end of the bag is not required to be sealed. The carrier shall be placed in the bag with the club loop turned flat to one side. Each bag shall contain a label (see 5.3).

5.1.2 Level C. - Carriers shall be packaged in accordance with the industry's practice.

5.2 Packing. - Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. - One hundred and fifty carriers, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner, conforming to class weather-resistant, size 2A of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60 pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.1.2 Method 2. - When specified, three level B shipping containers (450 carriers) shall be overpacked on end, three in length, within a fiberboard shipping container, conforming to class weather-resistant, size 4 of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto.

5.2.2 Level B. - One hundred and fifty carriers, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner, conforming to class domestic, size 2A of MIL-B-17757 and assembled, closed, and strapped in accordance with the appendix thereto. The fiberboard used in fabricating the boxes shall be grade 350. In addition, each container shall have the contents completely covered on the top and bottom with a sheet of 60 pound minimum basis weight kraft paper conforming to grade B of UU-P-268.

5.2.3 Level C. - Carriers, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. - In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Source: https://assist.dla.mil -- Downloaded: 202640-18T10:38Z
Check the source to verify that this is the current version before use.

Nomenclature
Stock number
Contract number
Name of contractor

6. NOTES

6.1 Intended use. - The club carrier is used as a component of the Marine Corps Military Police Equipment Set.

6.2 Ordering data. - Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) When preproduction sample is not required (3.2).
(c) Level of packaging and packing required (5.1 and 5.2).


6.3 Samples. - For information regarding the availability of samples of the carrier, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Marginal notations. - Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Navy-MC

Preparing Activity:
Navy-MC

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:38Z
Check the source to verify that this is the current version before use.

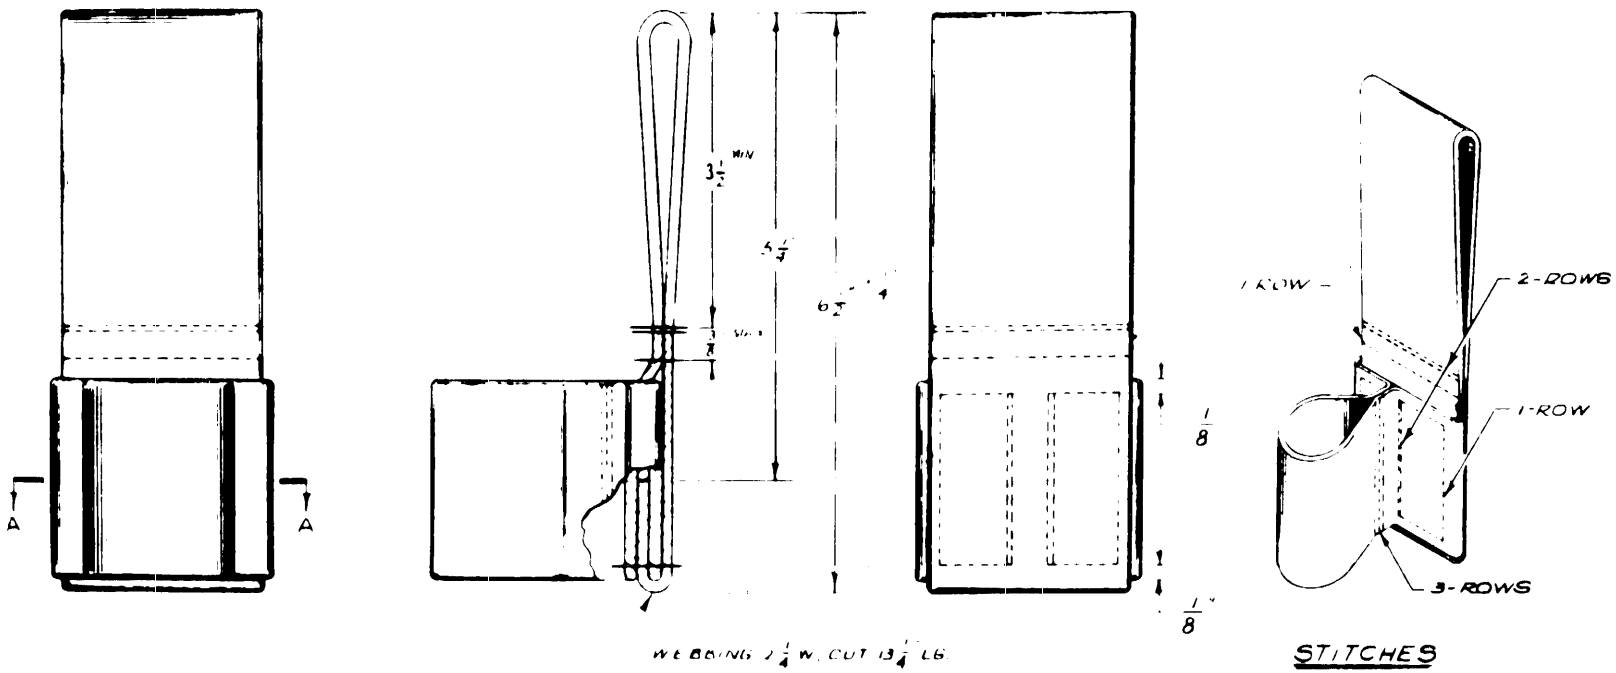

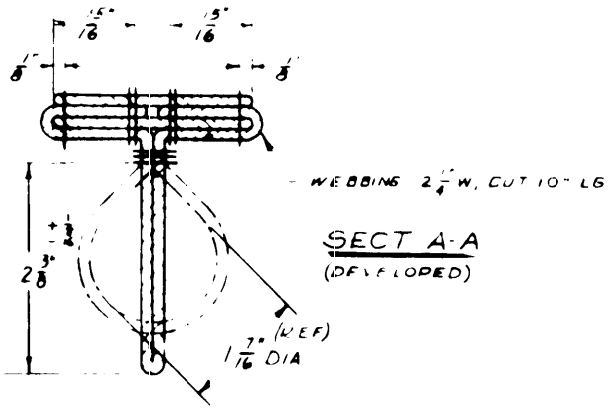


FIGURE 1. CARRIER, CLUB, POLICEMAN'S: COTTON WEBBING; WHITE

M.C.S.A.
826: R.G.F.
6 Jun '66

Source: https://assist.dla.mil -- Downloaded: 20260-18T10:38Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Penna. 19146

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
NAVY DEPARTMENT

Commanding General (826)
Marine Corps Supply Activity
1100 South Broad Street
Philadelphia, Pennsylvania 19146

FOLD

Source: https://assist.dla.mil -- Downloaded: 202610-18T10:38Z
Check the source to verify that this is the current version before use.