DETAIL SPECIFICATION SHEET

EXPANSION JOINTS, PIPE, METALLIC, PRESSURE BALANCED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-17813.

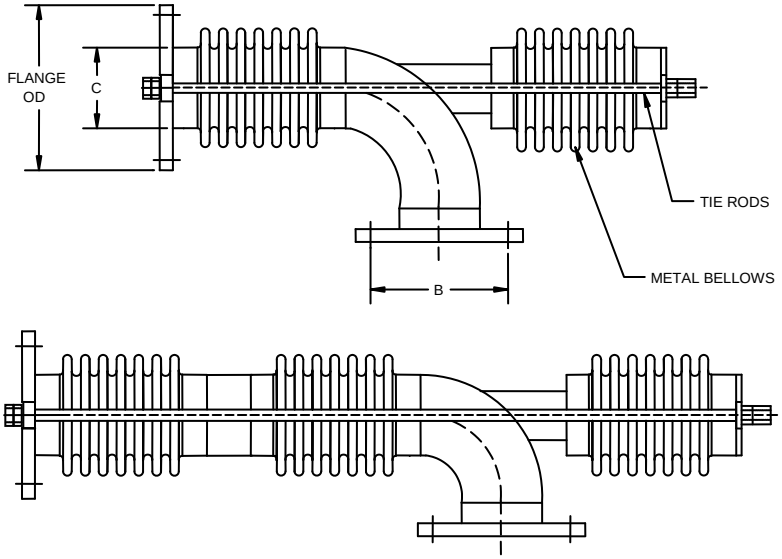

DN	C-NPS inch (mm)	Flange OD inch (mm) 1/	B (bolt circle diameter) inch (mm) 1/
50	2 (50.8)	6 (152.4)	4.75 (120.7)
65	2.5 (76.2)	7 (177.8)	5.5 (139.7)
80	3 (76.2)	7.5 (190.5)	6 (152.4)
90	3.5 (101.6)	8.5 (215.9)	7 (177.8)
100	4 (101.6)	9 (228.6)	7.5 (190.5)
125	5 (127)	10 (254.0)	8.5 (215.9)
150	6 (152.4)	11 (279.4)	9.5 (241.3)
200	8 (203.2)	13.5 (342.9)	11.75 (298.5)
250	10 (254)	16 (406.4)	14.25 (362.0)
300	12 (304.8)	19 (482.6)	17 (431.8)
350	14 (355.6)	21 (533.4)	18.75 (476.3)
400	16 (406.4)	23.5 (596.9)	21.25 (539.8)
450	18 (457.2)	25 (635)	22.75 (577.9)
500	20 (508)	27.5 (698.5)	25 (635)
550	22 (558.8)	-	-
600	24 (609.6)	32 (812.8)	29.5 (749.3)

1/ See ASME B16.5, flange dimensions,150 pound.

FIGURE 1. Expansion joint, pressure balanced.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:37Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only.
2. The illustration is for identification purposes only and is not intended to restrict designs and shapes of fastening devices, which conform to the requirements and are within the envelope dimensions.

FIGURE 1. Expansion joint, pressure balanced – Continued.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Construction: Pressure-balanced expansion joints shall consist of two or more bellows connected by pipe sections or fittings. It shall absorb axial movement and lateral deflection while absorbing the pressure thrust by means of tie devices interconnecting the flow bellows with an opposed bellows also subjected to line pressure.

The classification of the expansion joints covered under this specification sheet are as follows:

Type I - shall have corrugated bellows.

Class 3 - shall be pressure balanced.

Materials and finishes.

Materials and finishes for the bellows and flanges shall be in accordance with MIL-DTL-17813.

The Part or Identifying Number (PIN) consists of the letters M, the basic specification number, specification sheet number, size, type, class, pressure rating, and end connection.

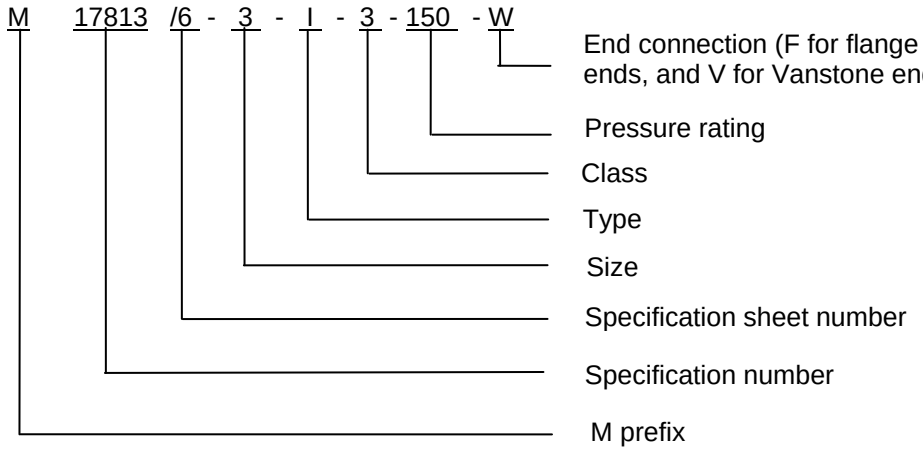

PIN example: M17813/6-3-I-3-150-W

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:37Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-17813, this document references the following:

ASME B16.5

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - SH
Air Force - 99
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2009-104)

Review activities:
Army - CE
Navy – MC, SA
Air Force - 71

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T10:37Z
Check the source to verify that this is the current version before use.