
MILITARY SPECIFICATION SHEET

PIN, STRAIGHT, HEADED (CLEVIS PIN), METRIC

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the pins described herein shall consist of this document and the latest issue of specification DOD-P-63479.

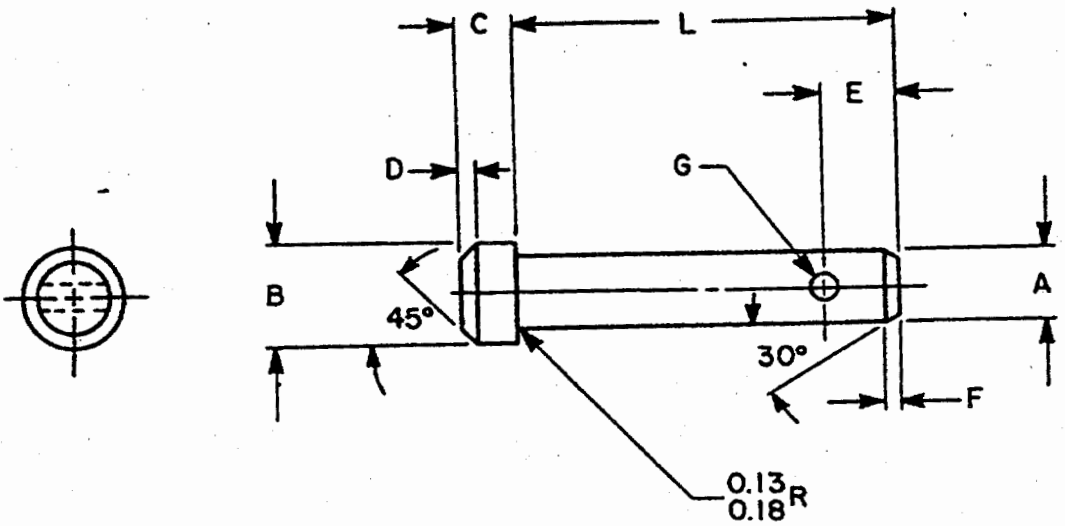

NOTES:

1. Unless otherwise specified, dimensions are in millimeters.
2. Tolerance on angles shall be ± 2°.

FIGURE 1. PIN, STRAIGHT, HEADED (CLEVIS PIN).


FSC 5315

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1. Material: Carbon steel.
2. Hardness: Carbon steel clevis pins shall have a cyanide hardness of 70HR30N minimum to a depth of 0.125 mm (millimeters) minimum.
3. Protective finish: Cadmium plating (code C); Zinc coating (code Z).
4. Part number: Consists of the letter "D", the basic number of this specification sheet, and a dash number taken from table I and a finish code identifier.

Example: D63479/1-5C

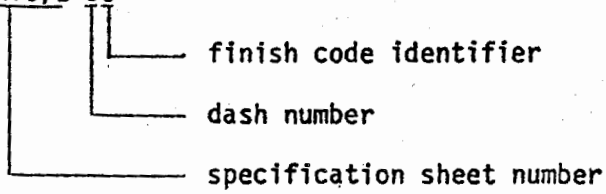

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers.

Nominal size (mm)		5	6	8	10	12	16	20
A Shank diameter	max	4.93	5.93	7.92	9.92	11.9	15.9	19.89
	min	4.85	5.85	7.83	9.83	11.8	15.8	19.76
B Head diameter	max	8.5	10.5	14.5	18.5	20.5	25.5	30.5
	min	8.0	10.0	14.0	18.0	20.0	25.0	30.0
C Head height	max	1.72	2.12	3.12	4.15	4.15	4.68	5.2
	min	1.60	2.00	3.00	4.00	4.00	4.50	5.0
D Head Chamfer	max	1.0	1.0	1.0	1.0	1.6	1.6	2.0
E End to center	min	2.9	3.2	3.5	4.5	5.5	6.0	8.0
F Point length	max	2.0	2.0	2.0	2.0	3.0	3.0	4.0
G Hole diameter	max	1.34	1.85	2.25	3.5	3.5	4.3	5.3
	min	1.20	1.60	2.00	3.2	3.2	4.0	5.0
L - Length	Tol	Dash numbers						
10	+0.5 0	1						
12	+0.5 0	2	22					
16	+0.5 0	3	23	43				
20	+0.5 0	4	24	44	64			
25	+0.5 0	5	25	45	65	85		
30	+0.5 0	6	26	46	66	86		
35	+0.5 0	7	27	47	67	87	107	
40	+0.5 0	8	28	48	68	88	108	128
45	+0.5 0	9	29	49	69	89	109	129
50	+0.5 0	10	30	50	70	90	110	130
55	+0.5 0		31	51	71	91	111	131
60	+0.5 0		32	52	72	92	112	132

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.

TABLE I. Part numbers. Continued

Nominal size (mm)		5	6	8	10	12	16	20
A Shank diameter	max	4.93	5.93	7.92	9.92	11.9	15.9	19.89
	min	4.85	5.85	7.83	9.83	11.8	15.8	19.76
B Head diameter	max	8.5	10.5	14.5	18.5	20.5	25.5	30.5
	min	8.0	10.0	14.0	18.0	20.0	25.0	30.0
C Head height	max	1.72	2.12	3.12	4.15	4.15	4.68	5.2
	min	1.60	2.00	3.00	4.00	4.00	4.50	5.0
D Head Chamfer	max	1.0	1.0	1.0	1.0	1.6	1.6	2.0
E End to center	min	2.9	3.2	3.5	4.5	5.5	6.0	8.0
F Point length	max	2.0	2.0	2.0	2.0	3.0	3.0	4.0
G Hole diameter	max	1.34	1.85	2.25	3.5	3.5	4.3	5.3
	min	1.20	1.60	2.00	3.2	3.2	4.0	5.0
L - Length	Tol	Dash numbers						
65	+0.5 0			53	73	93	113	133
70	+0.5 0			54	74	94	114	134
75	+0.5 0			55	75	95	115	135
80	+0.5 0				76	96	116	136
85	+0.5 0				77	97	117	137
90	+0.5 0					98	118	138
100	+0.5 0					99	119	139

Custodians:
Army - AR
Air Force - 99

Review activities:
Army - AT, AV
Air Force - 11
DLA-IS

User activities:
Army - ME

Preparing activity:
Army - AR

Agent:
DLA-IS

(Project 5315-0323)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:58Z
Check the source to verify that this is the current version before use.