MILITARY SPECIFICATION

ADAPTER, COMPRESSED AIR BREATHING APPARATUS, M4

This amendment forms a part of Military Specification MIL-A-50093A(MU), 29 April 1964.

Page 3, add new paragraph 3.4:

"3.4 Leakage. The assembled adapter, when subjected to 3500 ± 100 pounds per square inch, shall not leak more than 50 psi in 30 ± 5 seconds when tested as specified in 4.6."

Page 4, add new paragraph 4.5.1.1:

"4.5.1.1 For test. Each adapter shall be tested for leakage in accordance with 4.6. Any adapter found defective shall be rejected."

Page 5, add new paragraph 4.6:

"4.6 Leakage test. The M4 adapter shall be tested as follows: Connect the M4 adapter and test equipment as shown in figure 1. Open the needle valve on the test equipment and pressurize the M4 adapter to the required pressure, close the needle valve. Observe the pressure gage for the required period of time and record the pressure drop."

Page 5, add figure 1 (attached) after paragraph 4.6.

Custodian:

Army - MU

International interest

Preparing activity:

Army - MU (EA)

Project No. 4240-A306

FSC 4240

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.

TEST GAUGE - 1400 SERIES - FIG 1404
RANGE - 0 TO 5000 PSIG - ACCURACY 1/4 OF 1%
SPECIFICATIONS - 1/2 - 14 NPT - LOWER MALE CONNECTION
4 1/2 GAUGE SIZE
DIAL GRADUATION - 5000 PSIG MAX INDICATION
200 FIG INTERVALS
20 MINOR SUB DIVISIONS
MAY BE PROCURED FROM - H4-2 MFG CODE NO. 61349

NEEDLE VALVE - 1900 SERIES - POSITIVE SHUT OFF - 3/16 ORIFICE
MAX WORKING PRESSURE - 10000 LBS
TEMPERATURE RANGE -40° TO +500°
MAY BE PROCURED FROM H4-2 MFG CODE NO. 38508

PIPE FITTINGS - DOUBLE EXTRA HEAVY PIPE - WORKING PRESSURE 6000 PSIG
SIZE 1/2-14 NPT (EXCEPT AS NOTED)
MAY BE PROCURED FROM - H4-2 MFG CODE NO. 14959


TUBING - STAINLESS STEEL - WORKING PRESSURE 6000 PSIG
SIZE 1/4 OD X .035 WALL THK X 6.00 LG
MAY BE PROCURED FROM - HR4-2 MFG CODE NO. 89849

NIPPLE - STEEL - AN 816-4-4
37° FLARED TUBE & PIPE THREAD
SIZE 1/4 TUBE OD TO 1/2-14 NPT

PUMP - SINGLE OR DOUBLE PISTON TYPE
PRESSURE RELEASE IN BASE
MAX PRESSURE 6000 PSIG
CONNECTIONS 1/2 - 1/4 NPT
MAY BE PROCURED FROM - H4-2 MFG CODE NO. 01990


RELIEF VALVE - 5300 SERIES - BRASS
CONNECTION - 1/2 - 14 NPT FEMALE
OPERATING ADJUSTMENT - 3100 TO 7200 PSIG
CRACKING PRESSURE - 4000 PSIG
PART NO. 5349-B-4PP-4000
MAY BE PROCURED FROM - H4-2 MFG CODE NO. 95963

LUTE PIPE THREADS

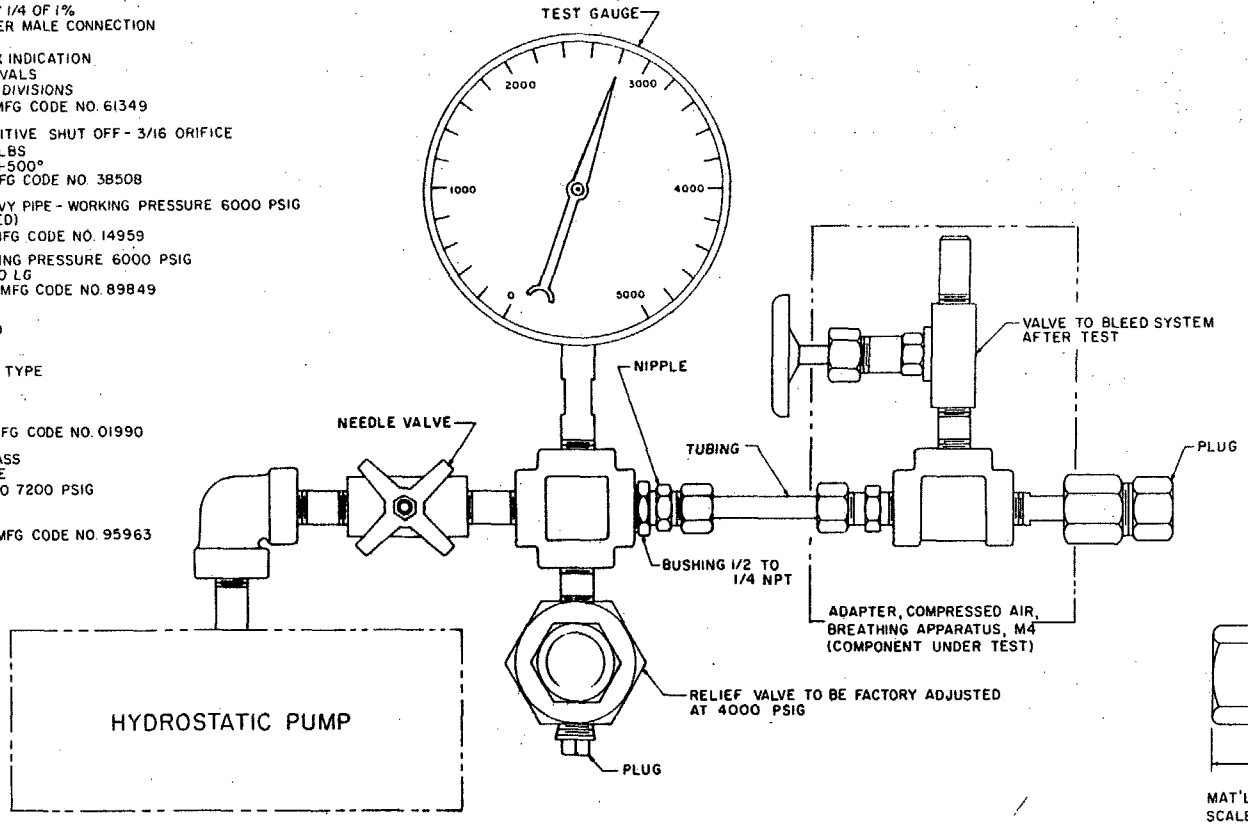

TEST FIXTURE
SCALE: 1/1

PLUG



MAT'L — STEEL 7/8 HEX
SCALE — 2/1

THREAD	.825-14 NS-RH THD
MAJOR DIA	.818-.821
PITCH DIA	.7750-.7786
MINOR DIA	.737 MAX
DRILL	A .185 DIA X .75 DEEP
DEPTH	B .323 +.020
DRILL	C .500 DIA
ANGLE	D 78° TO 80°

Figure 1. Leakage test setup

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-512/1868

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:16Z
Check the source to verify that this is the current version before use.