INCH-POUND

MIL-B-49430/4B(ER)
1 August 1991


SUPERSEDING
MIL-B-49430/4A(ER)
26 April 1988

# MILITARY SPECIFICATION SHEET

## BATTERY, NON-RECHARGEABLE, LITHIUM SULFUR DIOXIDE BA-5567/U

This specification sheet is approved for use within Laboratory Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-B-49430(ER).

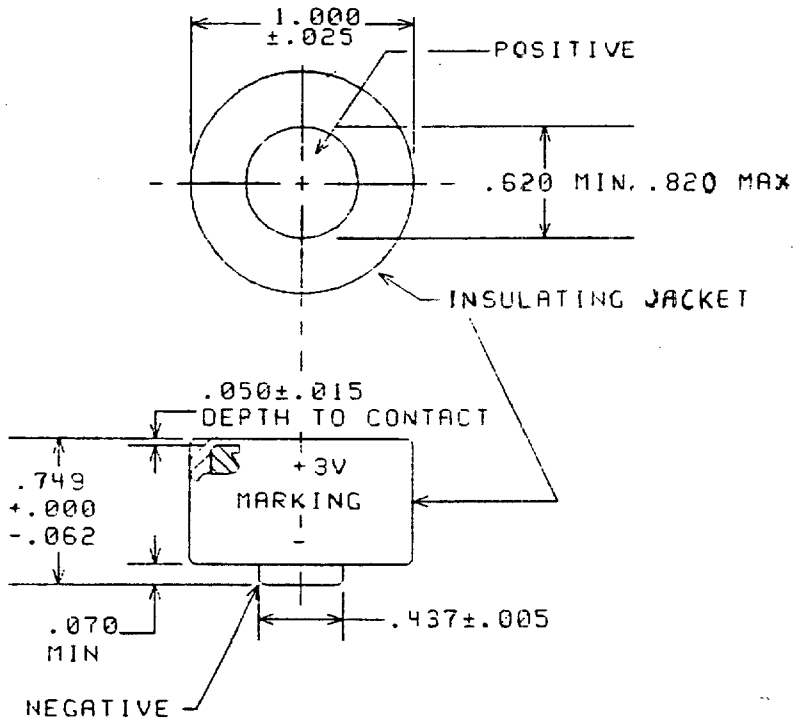


NOTE: ALL DIMENSIONS ARE IN INCHES.

Figure 1. Battery dimensions and terminal markings.

AMSC N/A FSC 6135

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See Figure 1.

Maximum voltage: 3.05 volts.

Minimum voltage (for capacity): 2.00 volts.

Terminals: See Figure 1.

Weight (maximum): 0.7 ounces (20 grams)

Fuse: No fuse is required.

High temperature switch. Not required.

Capacity tests: When the battery is tested in accordance with the methods of examination and tests of this specification, the minimum capacity test requirements shall be as specified below.

| Capacity Tests | Battery Capacity in Hours to 2.00 Volts |
|---|---|
| I | 18 |
| L | 10 |
| H | 18 |
| HT | 16 |
| LT | 8 |
| T | 17 |
| D | 17 |

Initial voltage delay: When the battery is subjected to the I, H, HT, T, and D capacity tests, initial closed-circuit voltages below 2.00 volts cannot exceed a 5.0 second duration. For the L and LT capacity tests initial closed-circuit voltages below 2.00 volts cannot exceed a 10.0 second duration.

METHOD OF EXAMINATION AND TESTS:

Capacity tests:

(1) Storage: Details on storage conditions for all specified capacity tests are described in basic specification.

(2) Discharge: Discharge current shall be 50-ma constant current.

Closed-circuit voltage: Load resistance of 20 ohms shall be used. Voltage shall be above two volts within five seconds.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.

Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Army - ER

Preparing Activity:
Army - ER

(Project 6135-A234-04)



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:05Z
Check the source to verify that this is the current version before use.