


Form Approved
OMB No. 0704-0188


The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-H-62550(AT)


This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

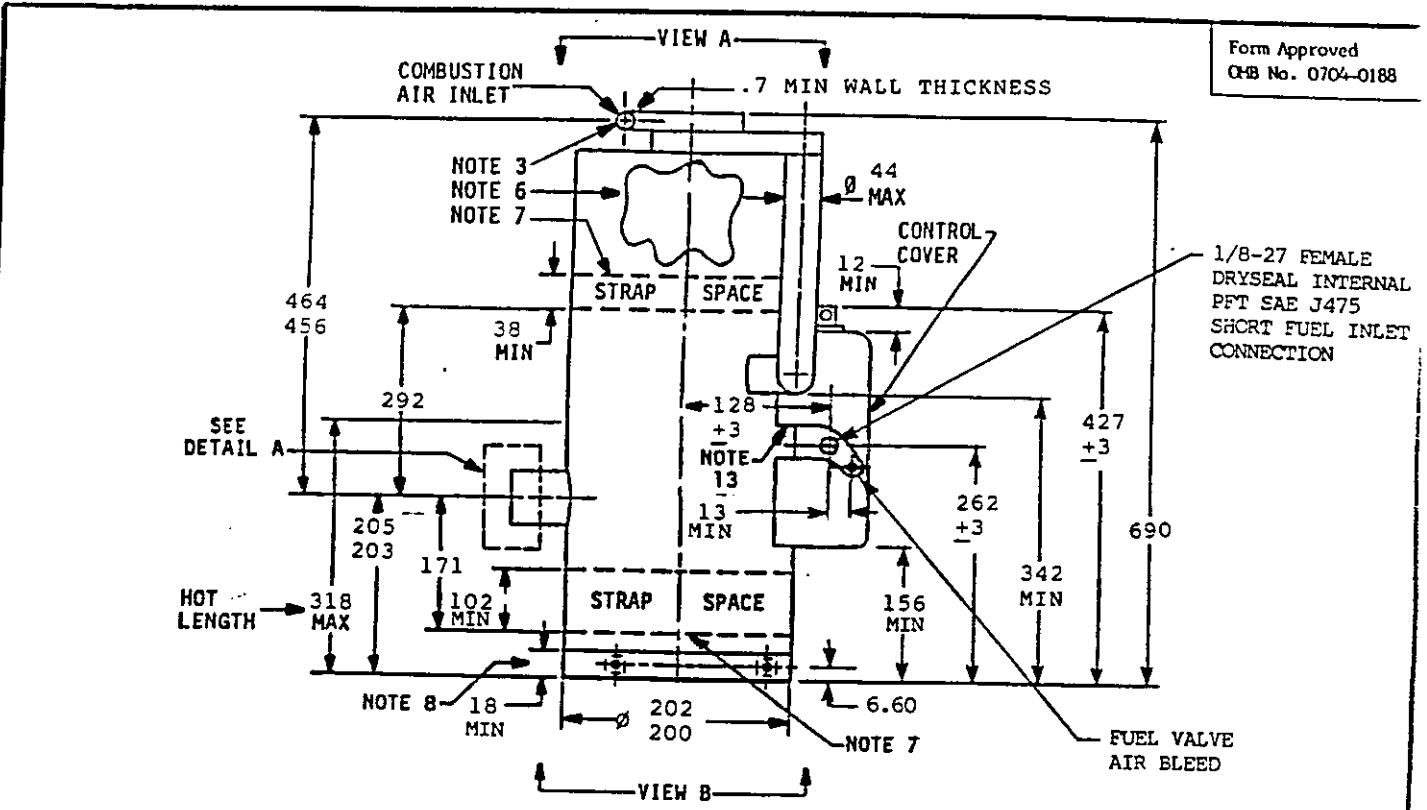

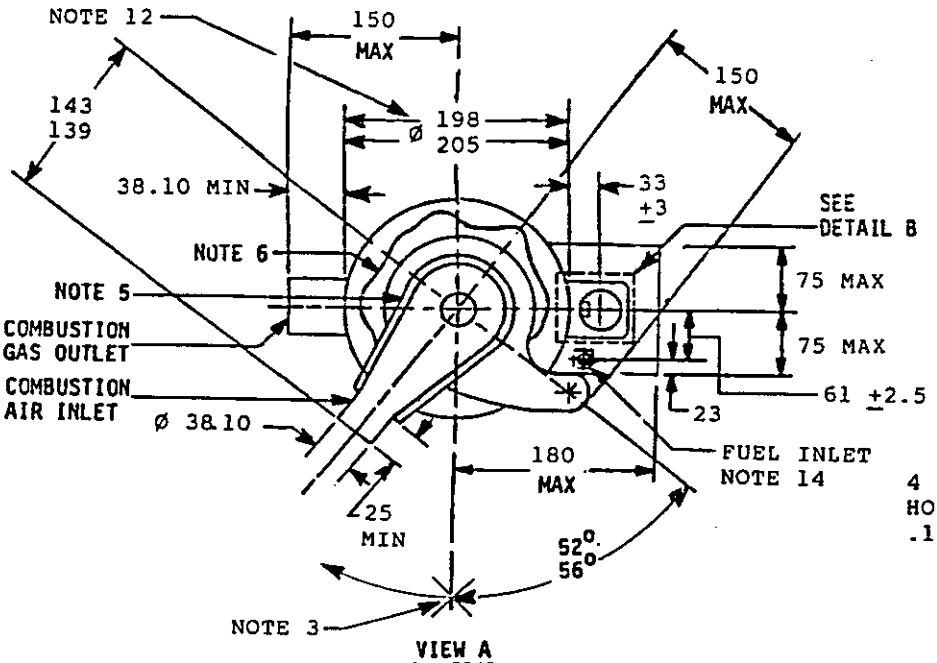

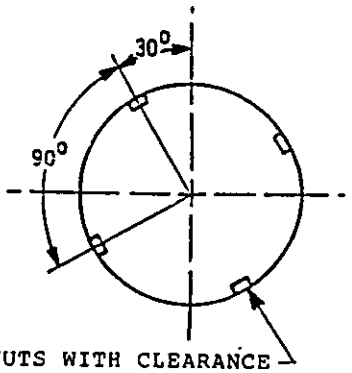

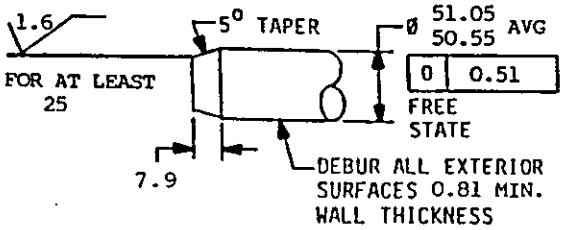



METRIC

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY-AT NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 2540-A033/2	MILITARY SPECIFICATION SHEET TITLE: HEATER ASSEMBLY, COMBUSTION VEHICULAR COMPARTMENT, 17.6 KW, DUAL AIR TYPE (METRIC)	SPECIFICATION SHEET NUMBER: MIL-H-62550/2(AT) 12 DECEMBER 1991 SUPERSEDING: AMSC-NA FSC-2540
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 1 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.

Form Approved
OMB No. 0704-0188

NOTES:

1. PERSONNEL HEATER MUST BE IN ACCORDANCE WITH SPECIFICATION MIL-H-62550 TYPE II, CLASS II.
2. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS (MM). TOLERANCES ARE ± 1.50 ON DECIMALS, AND ± 1° ON ANGULAR DIMENSIONS.
3. COMBUSTION AIR INLET SHALL BE ROTATABLE TO ANY ANGLE WITHIN A MINIMUM RANGE OF 290° CLOCKWISE FROM POINT X.
4. MOUNTING TABS ATTACHED TO THE 198 - 205.0 MM DIAMETER FOR THE CONTROLS COVER MAY EXCEED THE ENVELOPE BY NO MORE THAN 26 MM.
5. COMBUSTION AIR INLET MAY BE ANY SHAPE SO LONG AS IT CONFORMS TO THE SPECIFIED DIMENSIONS.
6. VENTILATION AIR INTAKE MAY BE ANYWHERE IN THE HEATER ENVELOPE ABOVE THE 38 MM STRAP SPACE.
7. NO FASTENERS OR RAISED, SHARP EDGES ARE ALLOWED IN THE STRAP SPACE AREAS. THE DIAMETER FOR THESE AREAS SHALL BE BETWEEN 200 AND 205 MM.
8. A DIAMETER OF 200 TO 202 MM SHALL BE MAINTAINED FOR 18 MM STARTING FROM THE OPPOSITE END FROM THE COMBUSTION AIR INLET.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON THE DATE OF INVITATIONS FOR BID.
10. INTERPRET ACCORDING TO ANSI Y14.5.
11. THIS IS A CRITICAL ITEM.
12. DIAMETER EXCLUDING AREAS SPECIFIED BY NOTES 7 AND 8.
13. OPENING IN CONTROLS COVER MUST BE AT LEAST 25 MM WIDE AND ALLOW NOT LESS THAN 13 MM ACCESS SPACE ABOUT THE CENTERS OF THE FUEL INLET AND AIR BLEED.
14. AS LONG AS THE REMAINING DRAWING REQUIREMENTS ARE MET, FUEL INLET AND AIR BLEED VALVE ARE NOT REQUIRED TO BE WITHIN THE CONTROLS COVER.
15. AS LONG AS NOTES 7 AND 8 AND THE REMAINING DRAWING REQUIREMENTS ARE MET, SCREW HEADS SHALL PROTRUDE ABOVE THE HEATER SURFACE BY NO MORE THAN 4.0 MM.
16. EXTERNAL BY-PASS OPTIONAL.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation: MIL-H-62550(AT)

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

METRIC

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- AT NAVY- AIR FORCE- DLA- REVIEW: USER: PROJECT NUMBER: 2540-A033/2	MILITARY SPECIFICATION SHEET TITLE: HEATER ASSEMBLY, COMBUSTION VEHICULAR COMPARTMENT, 17.6 KW, DUAL AIR TYPE (METRIC)	SPECIFICATION SHEET NUMBER: MIL-H-62550/2(AT) 12 DECEMBER 1991 SUPERSEDING: AMSC-NA FSC- 2540
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 2 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T01:48Z
Check the source to verify that this is the current version before use.