INCH-POUND

MIL-T-55164/14B
21 November 1988
SUPERSEDING
MIL-T-55164/14A
14 MARCH 1970

MILITARY SPECIFICATION SHEET

TERMINAL BOARDS, MOLDED, BARRIER STUD TYPE, CLASS 8TB

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the terminal board described herein shall consist of this specification and the latest issue of MIL-T-55164.

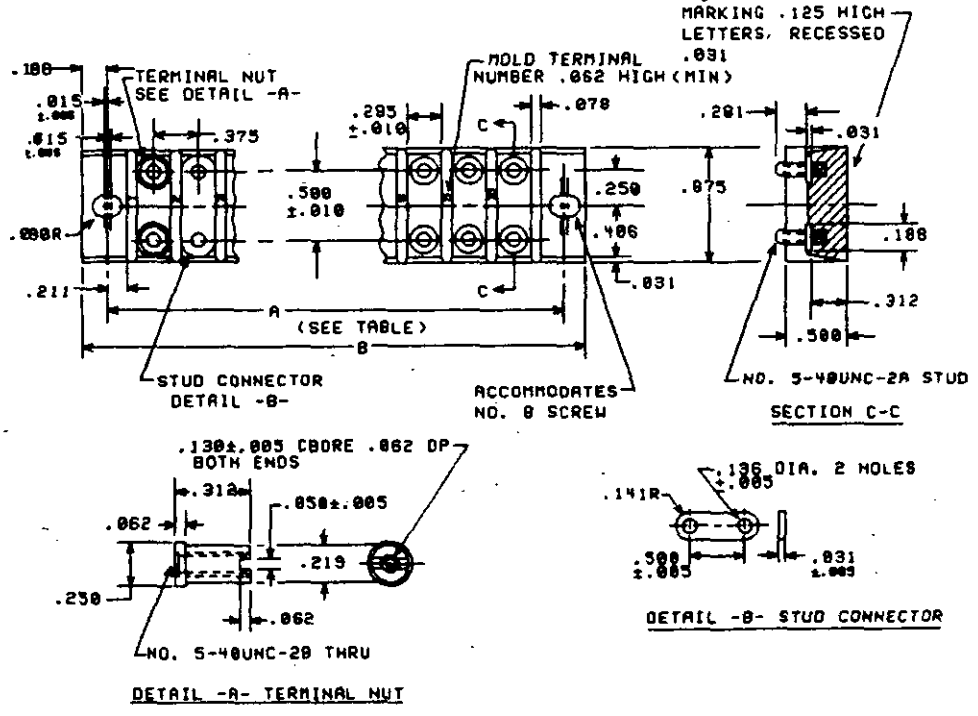


Figure 1. Dimensions and Configuration.

AMSC N/A FSC 5940

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01mm) are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 inch.
4. Studs and nuts for 8TB_H terminal boards shall be corrosion resistant steel in accordance with class 304 of QQ-S-763.
5. Studs shall be threaded to within 0.046 inch of the stud shoulder.

TABLE I DIMENSIONS

Type Designation 1/	Dimensions		Terminal Nuts Required	Stud Connectors Required
	A+.031,-.016 inch (mm)	B+.031,-062 inch (mm)		
8TB2_	1.250 (31.75)	1.625 (41.28)	4	2
8TB6_	2.750 (69.85)	3.125 (79.38)	12	6
8TB8_	3.500 (88.90)	3.875 (98.43)	16	8
8TB10_	4.250(107.95)	4.625(117.48)	20	10

1/ Add letter F or H for temperature range to complete type designation.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Voltage rating (maximum): 300 volts.

Current rating: 30 amps.

Maximum number of terminal lugs for each stud: 2.

With the stud connector removed, this terminal board shall provide twice the number of connection points and shall allow for an additional terminal lug per stud terminal (3), however this removal will reduce the current rating to 20 amps.

TABLE II. Requirements for Plastics.

Terminal Board Class 1/	Maximum Temperature (°C)	Materials	Applicable Specification
F	155	GDI-30F MAI-60	MIL-M-14
H	220	MSI-30	MIL-M-14

1/ Terminal boards of a higher temperature classification may be substituted for lower temperature classification terminal board.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.

Recommended wire terminal lugs.

MIL-T-16366	MS-17143 (dash no.)
L-83	-10
	-11
	-12

Dielectric withstanding test voltage: 1,600 volts rms.

Revision letters are not used to denote changes due to the extensiveness of the changes

Custodians:
Army-ER
Navy-
Air Force-85

Preparing Activity:
Army-ER

(Project 5940-1017-06)

Review Activities:
Army-MI
Navy-
Air Force- 99
DLA - GS

User Activities:
Army-AV, AT, ME
Navy-MC, AS, SH
Air Force-11

☆U.S. GOVERNMENT PRINTING OFFICE: 1989 604-033/11606

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:32Z
Check the source to verify that this is the current version before use.