MILITARY SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPE 35T

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of specification MIL-E-1.

DESCRIPTION: Triode

See figure 1

Weight: 2.5-ounces nominal (70.9 grams)

Mounting position: Vertical, base down or up

ABSOLUTE RATINGS: C Telegraphy

| Parameter: | Fl | Ef | Eb | Ec | Ib | Pg | Pp |
|---|---|---|---|---|---|---|---|
| Unit: | MHz | V | kVdc | Vdc | mAdc | W | W |
| Maximum: | 100 | 5.25 | 2.0 | -200 | 150 | 15 | 50 |
| Minimum: | --- | 4.75 | --- | --- | --- | --- | --- |
| TEST CONDITIONS: | --- | 5.0 | 1.0 | Adjust | 35 | --- | --- |

GENERAL:

Qualification - Required

(D) denotes changes



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

| METHOD | REQUIREMENT OR TEST | CONDITIONS | AQL (PERCENT DEFECTIVE) | INSPECTION LEVEL OR CODE | SYMBOL | LIMITS MIN | LIMITS MAX | UNIT |
|---|---|---|---|---|---|---|---|---|
| | Quality conformance inspection, part 1 | | | | | | | |
| 1301 | Filament current | | 0.65 | II | If | 3.6 | 4.2 | A |
| 1266 | Total grid current | See note | 0.65 | II | Ic | --- | -15 | µAdc |
| 1266 | Primary grid emission | Ef = 5.5 Vac; Ic = 85 mAdc; t = 15 seconds | 0.65 | II | Isg | --- | -500 | µAdc |
| 1261 | Electrode voltage (grid) | | 0.65 | II | Ec | -6.0 | -11.5 | Vdc |
| 1231 | Peak emission | eb = ec = 2,500 v | 0.65 | II | is | 2.0 | --- | a |
| | Quality conformance inspection, part 2 | | | | | | | |
| 1031 | Low-frequency vibration | No voltages | --- | --- | --- | --- | --- | --- |
| 1036 | Bump | Angle = 10° | --- | --- | --- | --- | --- | --- |
| 1316 | Amplification factor | | --- | --- | Mu | 35.0 | 43.0 | --- |
| 1236 | Power oscillation | Eb = 1,500 Vdc; Ib = 110 mAdc; F = 8 MHz | --- | --- | Po | 100 | --- | W (useful) |
| 1331 | Direct-interelectrode capacitance | | --- | --- | Cgp<br>Cin<br>Cout | 1.4<br>3.0<br>0.08 | 2.2<br>5.0<br>0.23 | pF<br>pF<br>pF |
| | Quality conformance inspection, part 3 | | | | | | | |
| --- | Life test | Group C; power oscillation: t = 500 hours | --- | --- | --- | --- | --- | --- |
| --- | Life-test end points: | | | | | | | |
| 1231 | Peak emission | | --- | --- | is | 1.6 | --- | a |
| 1266 | Primary grid emission | | --- | --- | Isg | --- | -500 | µAdc |

NOTE: This test is to be the first test performed at the conclusion of the holding period.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Air Force - 11, 17, 80
DSA - ES


User activities:
Army - MU
Navy - AS, OS, MC, CG, SH

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5960-2880)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

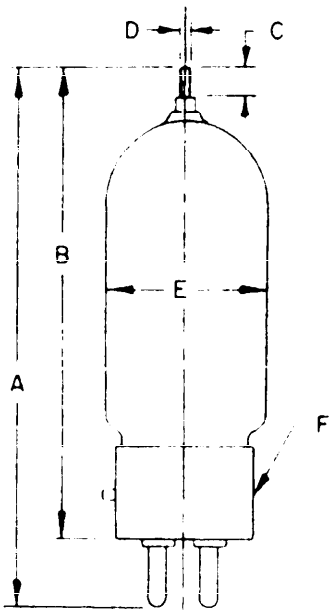


| PIN CONNECTIONS | |
|---|---|
| Pin No. | Element |
| 1 | f |
| 2 | nc |
| 3 | g |
| 4 | f |
| top wire | a |

| Ltr | Dimensions in inches with metric equivalents (mm) in parentheses | |
|---|---|---|
| | Minimum | Maximum |
| Quality conformance inspection, part 2 | | |
| A | 5.250 (133.35) | 5.500 (139.70) |
| C | .312 (7.92) | |
| E | | 1.813 (46.05) |
| (D) Quality conformance inspection, part 3 (see note) | | |
| B | 4.625 (117.48) | 4.875 (123.83) |
| D | .065 (1.65) | .071 (1.80) |
| F | Base: A4-10 (EIA) | |

NOTE:
These dimensions shall be performed annually, with the following sampling plan:

n1 = 4 c1 = 0 where c1 represents the total allowable failures
n2 = 4 c2 = 1; for the first and second samples combined.

In case of failure after double sampling, the failing dimension(s) shall become quality conformance inspection (QCI), part 2, for three successful consecutive submissions, at which time the test may revert to the QCI, part 3 basis.

FIGURE 1. Outline drawing of electron tube type 35T.



Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers' vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

[ ] DIRECT GOVERNMENT CONTRACT [ ] SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

[ ] YES [ ] NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

**DD FORM 1 JAN 72 1426** REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.