INCH-POUND
MIL-PRF-1/160N
w/AMENDMENT 1
1 August 2024
SUPERSEDING
MIL-PRF-1/160N
16 June 2003

PERFORMANCE SPECIFICATION SHEET

ELECTRON TUBE, POWER

TYPE 7034

Inactive for new design after
1 April 2008

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the electron tube described herein shall consist of this document and the latest issue of MIL-PRF-1.

DESCRIPTION: Tetrode.

See figure 1.

Mounting position: Any.

Weight: 4 ounces nominal.

ABSOLUTE RATINGS: F_1 = 150 MHz; F_2 = 500 MHz

Parameter	Ef	Eb	Ec1	Ec2	Ehk	Ib	Pg1	Pg2	Pp
Unit:	V ac note 2	V dc	V dc	V dc	V dc	mA dc	W	W	W
Maximum:									
C Tlg (Up to 150 MHz):	- - -	2,000	-250	300	± 150	250	2	12	250
C Tlg (150 to 500 MHz):	- - -	1,250	-250	300	± 150	250	2	12	250
Test conditions:	6.0	2,000	Adj	300	0	150	- - -	- - -	- - -

ABSOLUTE RATINGS: F1 = 150 MHz; F2 = 500 MHz.

Parameter:	T (base seal)	T (anode seal)	T (anode core)	tk
Unit:	°C note 1	°C note 1	°C note 1	sec (min)
Maximum:				
C Tlg (Up to 150 MHz):	175	200	250	30
C Tlg (150 to 500 MHz):	175	200	250	30
Test conditions:	note 3	- - -	- - -	120

GENERAL:

Qualification - Required.
Tube type 7035 has been deleted from this tube specification sheet: use MIL-PRF-1/1331, type 7609.

AMSC N/A
FSC 5960
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection.

Inspection	MIL-STD-1311 Method	Notes	Conditions	Acceptance level (see note 12)	Symbol	Limits Min	Limits Max	Unit
Conformance inspection, part 1								
Pulsing emission	1231	7	eb = ec1 = ec2 = 850 v	0.65	is	30	- - -	a
Electrode current (screen)	1256	-	Eb = 1,000 V dc	0.65	Ic2	-5	+3	mA dc
Electrode voltage (grid)	1261	-	Eb = 1,000 V dc	0.65	Ec1	-32	-45	V dc
Total grid current	1266	8	Ib = 125 mA dc	0.65	Ic1	- - -	-15	µA dc
Current division (method A, long pulse)	1372	-	Eb = Ec2 = 250 V dc; Ec1 = -100 V dc; egk/ib = 1.0 a; prr = 11.0 ± 1.0; tp = 4,500 µs (min)	0.65	egk ic1 ic2	8 - - - - - -	18 250 260	v ma ma
Primary grid emission (control)	1266	-	Ic1 = 70 mA dc; t = 15; anode and screen grid floating	0.65	Isg1	- - -	-25	µA dc
Primary grid emission (screen)	1266	-	Ec1 = 0; Ic2 = 100 mA dc; t = 15; anode floating	0.65	Isg2	- - -	-250	µA dc
Heater current	1301	-		0.65	If	2.30	2.90	Aac
Conformance inspection, part 2								
Low-frequency vibration	1031	-	No voltages applied	- - -	- - -	- - -	- - -	- - -
Shock, specified pulse	1042	-	No voltages applied; accel = 15 G peak (min); D = 11 ± 2 ms half-sine wave	- - -	- - -	- - -	- - -	- - -
Shock, and low-frequency vibration end points:	- - -	-						
Electrode voltage (grid)	1261	-		- - -	Ec1	-32	-45	V dc
Total grid current	1266	-		- - -	Ic1	- - -	-15	µA dc

See footnotes at end of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection Continued

Inspection	MIL-STD-1311 Method	Notes	Conditions	Symbol	Limits Min	Limits Max	Unit
Conformance inspection, part 2 -Continued							
RF useful power output (1)	2214	-	F = 150 MHz (min); Ec1 = -90 V dc; Ic1 = 25mA dc (max); Eg1/Ib = 250 mA dc	Po	225	- - -	W (useful)
RF useful power output (2)	2214	9	Class C amplifier; Ef = 5.5 V ac; F = 460 to 490 MHz; Eb = 1,250 V dc; Ec1 = -90 V dc; Ec2 = 250 to 300 V dc; Ic1 = 20 mA dc (max); Eg1/Ib = 250 mA dc	Po	145	- - -	W (useful)
Direct-interelectrode capacitance	1331	-	EIA standard shield No. 320 and No. 321, or equal	Cgp Cin Cout	- - - 14.5 4.0	0.05 17.0 4.8	pF pF pF
Heater-cathode leakage	1336	-	Ehk = + 150 V dc Ehk = - 150 V dc	Ihk Ihk	- - - - - -	150 150	µA dc µA dc
Conformance inspection, part 3							
Life test (1)	- - -	-	Group C; rf useful power	- - -	- - -	- - -	- - -
Life-test (1) end points:	- - -		output (1): t = 500 hours				
Pulsing emission	1231	-		is	21	- - -	a
Primary grid emission (control)	1266	-		Isg1	- - -	-100	µA dc
Primary grid emission (screen)	1266	-		Isg2	- - -	-250	µA dc
Heater-cathode leakage	1336	-	Ehk = +150 V dc Ehk = - 150 Vdc	Ihk Ihk	- - - - - -	150 150	µA dc µA dc

See notes at end of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection Continued

Inspection	MIL-STD-1311 Method	Notes	Conditions	Symbol	Limits Min	Limits Max	Unit
Conformance inspection, part 3 - Continued.							
Life test (2)	- - -	-	Group C; Ec1 = Ec2 = Eb = 0; t = 500 hours; Ef = 6.6 V ac	- - -	- - -	- - -	- - -
Life-test (2) end points:	- - -						
Interelement leakage resistance, cold	1366	10	Rs = 2.5 Megohm E = 100 V dc; g1 negative E = 500 V dc; g2 positive E = 500 V dc; g2 positive	 Rg1k Rg1g2 Rg2k	 10 10 10	 - - - - - - - - -	 MegΩ MegΩ MegΩ
Periodic-check tests							
Life test (3)	- - -		RF useful power output (2); t = 500 hours	- - -	- - -	- - -	- - -
Life-test (3) end points:	- - -						
Pulsing emission	1231			is	21	- - -	a
Primary grid emission (control)	1266	-		Isg1	- - -	-100	µA dc
Primary grid emission (screen)	1266	-		Isg2	- - -	-250	µA dc
Heater-cathode leakage	1336	- -	Ehk = +150 V dc Ehk = - 150 V dc	Ihk Ihk	- - - - - -	150 150	µA dc µA dc
Coolant pressure drop versus coolant flow (forced air)	1155	4	No voltages applied	- - -	- - -	0.60	Inches of water
Forced cooling	1143	5	Eb = 1.000 V dc Ec1/Ib = 250 mA dc	T(anode core) T(anode seal) T(base seal)	- - - - - - - - -	175 150 125	°C °C °C
Overload	- - -	6	Eb = 1,000 V dc	- - -	- - -	- - -	- - -
Overload end point: Total grid current	1266			Ic1	- - -	-25	µA dc

See notes at end of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection Continued

NOTES:

1. When the tube is operated at 100 percent of maximum rated anode dissipation at an incoming air temperature of 25°C maximum, a minimum airflow of 5.6 cubic feet per minute (cfm) at sea level shall pass through the anode cooler. The static pressure drop across the anode cooler at this flow is approximately 0.26 inch of water. If the socket on Drawing 246-JAN is used, an incoming airflow of 5.6 cfm to the grid end of the socket is required. At this flow of 5.6 cfm, the static pressure drop directly across the tube and socket is approximately 0.60 inch of water. This pressure drop varies with the amount of escaping air and with the shape and construction of the air director. The airflow rating applies at bias voltages less than 100 volts and frequencies less than 500 MHz. Air cooling of the tube shall be increased with increased negative grid bias, increased incoming air temperatures, or increased frequency of operation, or a combination. In all cases of operation, a socket which provides forced-air cooling of the base shall be used and maximum seal and radiator temperature ratings shall not be exceeded. The airflow shall be applied before or simultaneously with electrode voltages, and may be removed simultaneously with them.

2. Maximum life may be obtained by adjusting the heater voltage in accordance with the application. A table of heater voltage verse frequency is presented as a guide.

Frequency (MHz)	Ef (V ac)
Up to 300	6.00
301 to 400	5.75
401 to 500	5.50

3. In all cases of electrical tests involving application of heater voltage, the socket on Drawing 246-JAN shall be used. An incoming airflow of 6.0 cfm maximum to the grid end of the socket is permitted.

4. An infinite baffle system as shown on figure 2, or equal, with an airflow of 5.6 cfm at sea level shall be used. The static pressure drop is measured across the tube and socket.

5. The forced-cooling test shall be made as follows:

   At an ambient temperature of 25 FC, both the base and the anode shall be cooled by applying an airflow of 5.6 cfm maximum, at sea level from a single source using the infinite baffle system as shown on figure 2, or equal.

   At the specified test conditions, the anode core temperature, the anode seal temperature, and the base seal temperature shall not exceed the specified limits.

   All temperatures shall be measured by means of thermocouples located as follows:

   Anode core: This thermocouple shall be embedded in the top of the cooler, with the anode dome removed, if necessary, by means of drilling a small hole, shallow enough so that the tube vacuum shall not be lost, placing the welded thermocouple junction therein, and then bending the edges of the hole in order to hold the thermocouple firmly in place.

   Anode seal: This thermocouple shall be attached, using any appropriate material, to the surface of the metal immediately above metal-to-dielectric seal.

   Base seal: This thermocouple shall be attached, using any appropriate material, to the surface of the metal immediately adjacent to the base dielectric material and at the immediate periphery of the dielectric material.

   In all cases, good electrical continuity between the thermocouple and the metal area in close proximity must be demonstrated before the cooling test can be performed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

TABLE I. Testing and inspection Continued.

6. This is a destructive test. Operate the tube in an upright position. Preheat the tube at specified test conditions for 1 minute. Remove airflow for 100 seconds. Restore airflow and after 1 minute perform the total grid current test. Any tube which evidences a short or open circuit during this test will be considered a failure.

7. The maximum value of the voltage applied to the anode and grids shall not exceed 900 volts. The pulse duration measured at 5 percent of the maximum value shall be not less than 3 microseconds (µs). At 50 percent amplitude, the duration shall be less than 2 µs. The applied voltage shall have a maximum repetition rate such that the duty cycle, based on the pulse length measured at 50 percent amplitude, shall not exceed 0.0002 (0.02 percent). An alternate pulsing emission test may be used with the following conditions and limits:

Conditions	Parameter	Minimum	Maximum
is = 30 a , eb = ec1 = ec2	etd	- - -	850 v

For life-test end points, is = 21 a.

8. This test is to be the first test performed at the conclusion of the holding period.


9. Circuit and cavity shall be in accordance with Drawing 223-JAN.

10. This test shall be made a minimum of 30 minutes after Ef is turned off. Rated airflow shall be maintained during the 30- minute interval. Measurement to be made with General Radio Megometer Model No. 1862C, or equivalent. Unused elements shall be left floating.

11. Tube type 7035 has been deleted from this tube specification sheet: use MIL-PRF-1/1331, type 7609.

12. This specification sheet uses accept on zero defect sampling plan, in accordance with MIL-PRF-1, table III.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

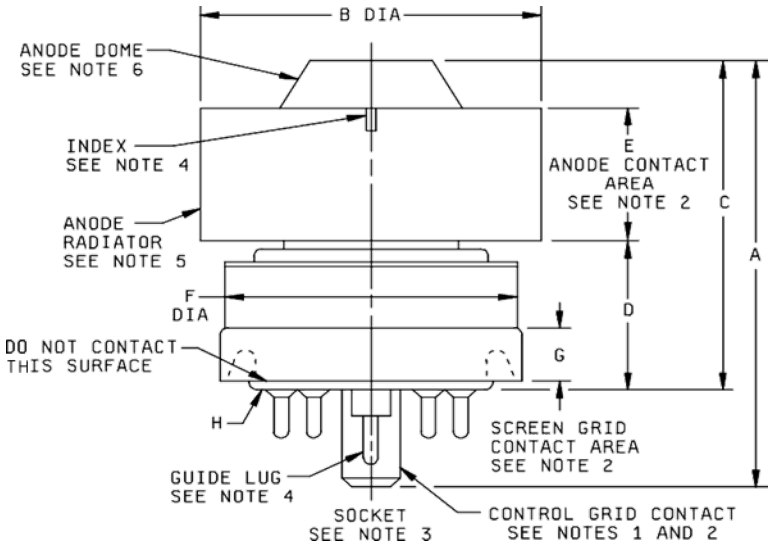

Pinconnections	
Pin no.	Element
1	g2
2	k
3	h
4	k
5	int con
6	k
7	h
8	k
center post	g1
radiator	a
base ring	g2


Dimensions in inches with metric equivalents (mm) in parentheses		
Ltr	Minimum	Maximum
Conformance	inspection, part 2	
A	2.224 (56.49)	2.414 (61.32)
C	1.710 (43.43)	1.860 (41.24)
Conformance	inspection, part 3	(periodic check) (See note 7)
B	1.610 (40.89)	1.640 (41.66)
D	0.750 (19.05)	0.810 (20.57)
E	0.710 (18.03)	0.790 (20.07)
F	- - -	1.406 (35.71)
G	0.187 (4.75)	- - -
H	Base: B8-236 (EIA) (See note 1)	

NOTES:

1. Pin alignment shall be checked by means of JEDEC gage GB8-3 or equivalent. Dimensions of control-grid contact shall be inspected by means of gages specified on Drawing 246-JAN and shall be conformance inspection, part 2.
2. Alignment of anode, screen-grid, and control- grid contact surfaces shall be determined by means of gage specified on Drawing 168-JAN (see note 13). Conformance inspection, part 2, shall apply.
3. Air system socket shall be as specified on Drawing 246-JAN.
4. Location of guide lug of control-grid contact may be referenced by a notch or arrow on the anode radiator in the position shown.
5. Anode clamping shall be confined to the anode radiator.
6. Dome contour shall be such that it will be contained within crosshatched area of template shown on figure 3. Optical comparator techniques are normally used for this purpose.
7. Perform on a sample of 10 tubes from the first production lot of each year, with one failure allowed. In case of a sample failure, the failing dimension(s) shall become part of conformance inspection, part 2 for three consecutive successful submissions at which time the test may revert to the yearly periodic basis.

FIGURE 1. Outline drawing of electron tube type 1034 Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

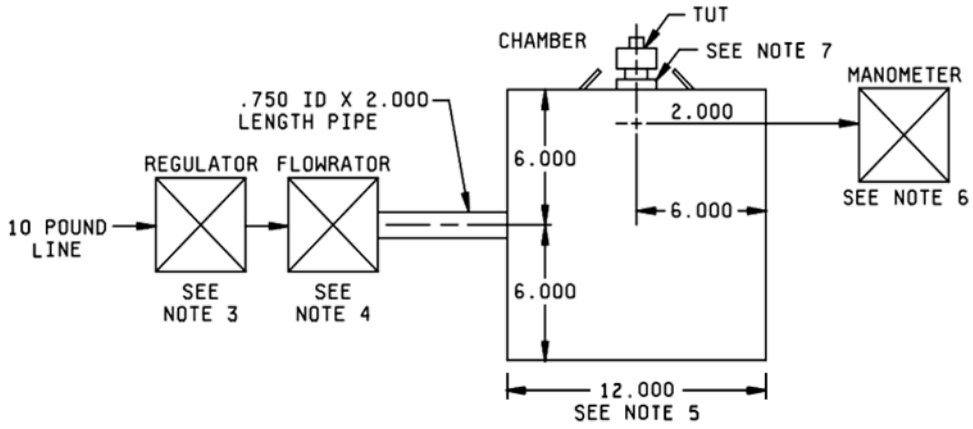


Dimensions	
Inches	Millimeters
0.750	19.05
2.000	50.80
6.000	152.40
12.000	304.80

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Fisher-Governer pressure regulator model 67, or equal.
4. Fisher Porter flowrator model B4-27-10/77, or equal.
5. 12 inches (304.80 mm) cube inside dimensions, compound sealed, or equal.
6. F. W. Dwyer manometer, 0 to 1 inch (25.40 mm) of water (Fisher Scientific Company 11 295-5 draft gage), or equal.
7. Socket specified on drawing 246-JAN.

FIGURE 2. Block diagram.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.

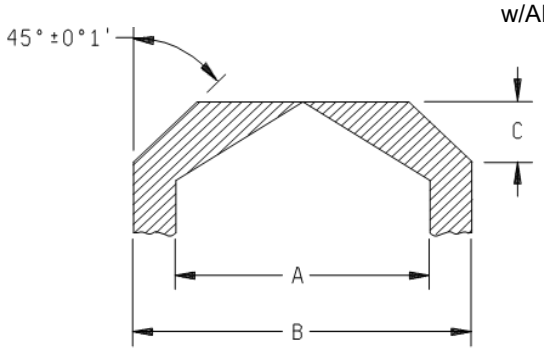

Dimensions in inches with metric equivalents (mm) in parentheses		
Ltr	Maximum	Minimum
A	0.7005 (17.79)	0.6995 (17.77)
B	1.0005 (25.41)	0.9995 (25.39)
C	0.1905 (4.84)	0.1895 (4.82)

FIGURE 3. Contour limits of dome shape.

Referenced documents. In addition to MIL-PRF-1 this specification sheet references the following documents: MIL-STD-1311, MIL-PRF-1/1331, Drawing 168-JAN, Drawing 223-JAN, and, Drawing 246-JAN

NOTE: To obtain copies of JAN drawings, please send a request via email to TubesAmps@dla.mil.

Amendment notations. The margins of this specification sheet are marked with vertical line to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Review activities:
Army - AR
Navy - AS, CG, MC, OS, SH

Preparing activity:
DLA - CC

(Project 5960-2024-010)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T12:59Z
Check the source to verify that this is the current version before use.