MIL-C-6720C(AS)
11 June 1980
SUPERSEDING
MIL-C-6720B(WP)
1 November 1964

MILITARY SPECIFICATION

CLOCK, AIRCRAFT, ELAPSED TIME, CIVIL DATE, 24-HOUR, 2-3/4 INCH DIAL

This specification is approved for use by the Naval Air Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of 24-hour indicating, 8-day, aircraft clock with a 2-3/4 inch round dial, civil date, and elapsed time indicator.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

DD-G-451	Glass, Flat and Corrugated, for Glazing, Mirrors, and Other Uses

Military

MIL-P-116	Preservation-packaging, Methods of
MIL-N-3336	Nut, Sheet Spring, Instrument Mounting
MIL-L-3918	Lubricating Oil, Instrument, Jewel Bearing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Naval Air Engineering Center, ESSD, Engineering Specifications and Standards Department, (Code 93), Lakehurst, NJ 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

FSC 6645

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS (Continued)

Military (Continued)

MIL-E-5272	Environmental Testing, Aeronautical and Associated Equipment, General Specification for
MIL-S-7742	Screw Threads, Standard, Optimum Selected Series, General Specification for
MIL-A-8625	Anodic Coatings, for Aluminum and Aluminum Alloys
MIL-D-1000	Drawings, Engineering and Associated Lists
MIL-N-18307	Nomenclature and Nameplates for Aeronautical, Electronic, and Associated Equipment
MIL-L-25142	Luminescent Material, Fluorescent

STANDARDS

Federal

FED-STD-595	Colors

Military

MIL-STD-130	Identification Marking of U.S. Military Property
MIL-STD-794	Parts and Equipment Procedures for Packaging and Packing of
MS28105	Cover, Glass, Aircraft Instrument Dial
MS33558	Numerals and Letters, Aircraft Instrument Dial, Standard Form of
MS90329	Clock - Aircraft, Elapsed Time, Civil Date 24 Hour, 2-3/4 Inch Dial

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 First article. Unless otherwise specified, the clock furnished under this specification shall be a product which has been inspected and has passed the First Article inspection specified in 4.2 and 6.2.

3.2 Materials. Materials shall conform to applicable specifications and shall be as specified herein. Materials which are not covered by applicable specifications or which are not specifically described herein shall be of the best quality, of the lightest practicable weight, and suitable for the purpose intended.

3.2.1 Metals. Metals shall be of the corrosion-resisting type unless suitably protected to resist corrosion during normal service life.

3.2.2 Nonmagnetic materials. Nonmagnetic materials shall be used for all parts of the clock except where magnetic materials are essential.

3.2.3 Fungus-proof materials. Materials which are not nutrients for fungi shall be used to the greatest extent practicable. In cases where materials, that are nutrients for fungi must be used, such materials shall be treated with fungicidal agent.

3.3 Design and construction. The clock shall conform to MS90329. The design shall be reasonably simple, to permit overhaul or repair without the use of special tools or fixtures. The clock shall be so constructed as to withstand the normal strains, shocks, vibrations, and such other conditions as are incident to shipping, storage, installation, and service, without failure. Provision shall be made for making adjustments to the mechanism without removing the cover glass or bezel.

3.3.1 Screw threads. Screw threads greater than 0.060 inch in diameter shall conform to MIL-S-7742.

3.3.2 Case. The case shall be rain tight and have a vent hole in the bottom.

3.3.2.1 Body. The body of the case shall be made either of aluminum alloy or of plastic material, shall be uniform in texture, and shall have a smooth surface, with durable black finish. The mounting flange portion of the body shall have a dull finish. Plastic material shall be of the thermo-setting type composed of a suitable filler and phenol condensation binder.

3.3.2.2 Bezel ring. The bezel ring, if used, shall be made of nonferrous, low-density metal and shall have a durable dull black finish. The bezel ring shall be held in place by means of screws.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

3.3.2.3 Snap rings. Snap rings, if used, shall be so designed that they can be removed from the case without danger of breaking the case or cover glass. Steel snap rings shall not be used.

3.3.2.4 Cover glass. The quality of the cover glass shall be in accordance with DD-G-451, Type II, Quality AA. Any flaws permitted by DD-G-451 shall not interfere with reading of the dial. The dimensions of the cover glass shall be in accordance with MS28105.

3.3.3 Dial. The dial shall be of aluminum or aluminum alloy and shall be fastened securely into the case or upon the frame of the mechanism by at least two screws in such a manner that it will not loosen or turn when the clock is vibrated.

3.3.4 Dial and cover glass. The distance between the inside surface of the cover glass and the dial shall not exceed 1/4 inch.

3.3.5 Pointers. The main-dial hour, minute, and sweep second hands shall conform to the dimensions shown on Figure 1. The hands shall be light and sufficiently rigid to prevent oscillation under vibration and shall be firmly attached to the mechanism.

3.3.6 Stem wind. The clock shall be stem-wound and stem-set. The mainspring shall wind when the stem is turned in a clockwise direction. The stem shall have a back ratchet, and when the stem is pulled outward it shall be in the setting position.

3.3.7 Chronograph mechanism. The clock shall have a chronograph mechanism incorporating a sweep second hand, the number of revolutions being counted by a minute totalizer hand indicating from 0 to 60 minutes and repeating, with one button to control the start, stop, and fly-back of both hands. The minute totalizer hand shall be of the jump type and shall advance 1 minute between the 58- and 60-second positions of the sweep second hand. The minute totalizer shall be on the top inner dial.

3.3.8 Civil date indicator. The clock shall have a jump-type civil date indicator operated by the clock mechanism so as to advance the date one unit between 2356 and 2400 hours.

3.3.8.1 Civil date reset. A reset mechanism shall be provided for the civil date indicator to be operated by depressing a push-button incorporated flush with the case front, the date being advanced one unit for each operation of the control. Operation of the date reset shall not cause movement of the hour, minute, or sweep second hand.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

3.3.9 Elapsed time mechanism. An elapsed time inner dial shall be incorporated and arranged as shown on Figure 1. The elapsed time mechanism shall have two hands for indicating hours and minutes of elapsed time up to 12 hours and shall be started, stopped, and returned to 1200 by successive depressions of a single control button.

3.3.9.1 Elapsed time indicator. There shall be an indicator within the elapsed time inner dial which will show when the elapsed time hands are in motion, when the hands are stopped, and when they are stopped at 1200.

3.3.10 Small second hand. The clock shall have a continuously running second hand. This small second hand shall be located on the right hand inner dial shown in Figure 1.

3.3.11 Balance and hairspring unit. Balance and hairspring unit shall be of the temperature-compensated type. The balance shall be fitted with not less than 12 screws, of which at least 4 shall be regulating screws.

3.3.11.1 Balance staff. The balance staff shall be of a type which may be readily removed and replaced without disturbing the poise of the balance wheel.

3.3.11.2 Hairspring. The hairspring shall be of the Breguet type made of corrosion-resisting metal.

3.3.12 Movement. The clock shall have an 8-day movement with not less than 15 jewels located at bearing points essential to reduce friction of train, escapement, and chronograph parts.


3.3.13 Lever regulator. The clock shall have a lever regulator for adjusting the rate, accessible without removing the movement from the case. The clock shall be furnished with the lever regulator in its middle position within $\pm$10 percent of the range on each side.

3.3.14 Weight. The weight of each clock shall not exceed 1.0 pound.

3.3.15 Lubrication. The clock shall be furnished with sufficient lubrication to provide for at least 2 years operation. The lubricant shall conform to MIL-L-3918 and shall be of such quality that satisfactory lubrication will be provided when the clock is run at temperatures in the range of $+50^{\circ}$ to -35°C ($+122^{\circ}$ to -31°F).

3.4 Interchangeability. All parts having the same manufacturer's part number shall be directly and completely interchangeable with each other with respect to installation and performance. Changes in manufacturer's part numbers shall be governed by the drawing number requirements of MIL-D-1000.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:20Z
Check the source to verify that this is the current version before use.

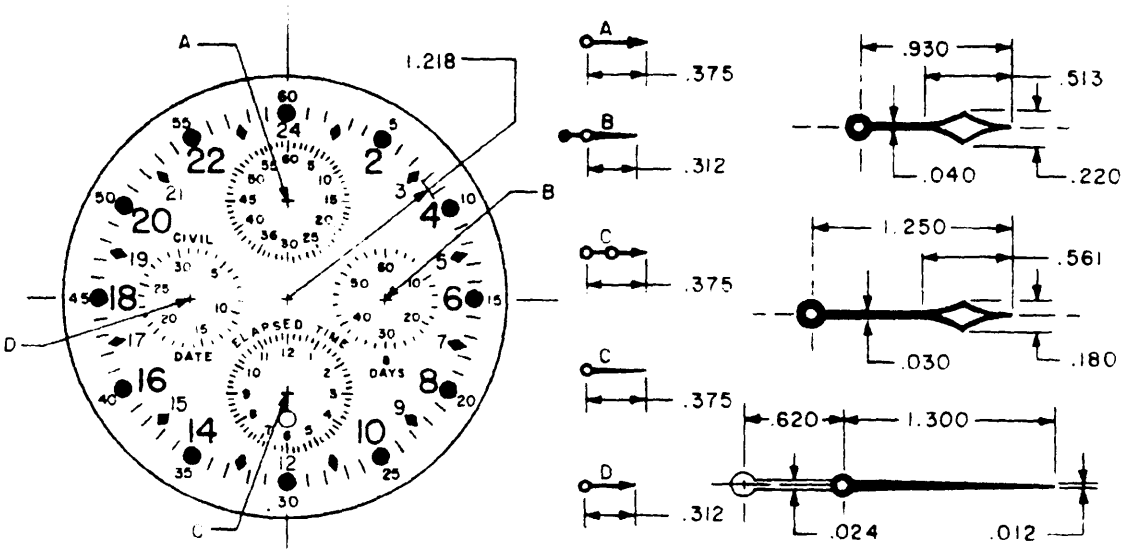

MARKINGS	HEIGHT or LENGTH	MATERIAL or FINISH
Dot at: 2, 4, 6, 8, 10, 12, 14, 16, 18, 20, 22, and 24 hour positions. Each minute graduation on outer dial All diamond graduations	.093 ± .005D .093 ± .005 Approx .093 long Approx .047 wide	
Hour, minute, sweep-second, and minute register hands from hub to tip Graduations corresponding to numerals on minute register dial and civil date dial, including graduation corresponding to 31 on civil date dial. Nonoperating portion of elapsed time signal flag. All other inner dial graduations Hour numerals: 3, 5, 7, 9, 12, 15, 17, 19, 21, and 24. Hour numerals: 2, 4, 6, 8, 10, 14, 16, 18, 20, and 22. Minute numbers: 5, 10, 15, 20, 25, 30, 35, 40, 45, 50, 55, 60 All inner dial numerals Lettering "CIVIL DATE", "ELAPSED TIME", "8 DAYS".	- - - - - - - - - .047 ± .003 - - - - - - - - - .032 ± .005 .093 ± .010 .175 ± .018 .080 ± .005 .062 ± .005 .062 ± .005	Lusterless White Color No. 37875 FED-STD-595 or Fluorescent Luminescent material MIL-1-25142
Operating portion of elapsed time signal flag	- - - - - - - - -	Red fluorescent material, U. S. Radium Corp., 425W-2 or equivalent
Lettering on Case "SET DATE"	.062 ± .005	Lusterless white color No. 37875 FED-STD-595
Background for dial	- - - - - - - - -	Lusterless black color No. 37038 FED-STD-595

FIGURE 1. Dial Markings and Pointers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

3.4.1 Maintenance. The design shall be such as to facilitate as much as possible disassembly, repair or overhaul, service maintenance, and reassembly using those tools and items of maintenance equipment which are normally available as commercial standards.

3.5 Finish. Protective coatings and finishes which will crack, chip, or scale during normal service life or due to extremes of atmospheric conditions, shall not be used.

3.5.1 Aluminum-alloy parts. Aluminum-alloy parts shall be covered with an anodic film conforming to MIL-A-8625, except that dials, if of aluminum alloy, small holes, and parts on which anodic film would interfere with proper performance need not be anodized.

3.6 Performance. The clocks shall satisfy the performance requirements specified in Section 4, when subjected to the applicable tests.

3.7 Markings. All markings shall be durable to withstand usage encountered in service.

3.7.1 Pillar plates and bridges. Bridges or mounting plates shall be stamped or engraved to show the number of jewels, number of adjustments, and that it is adjusted to temperature.

3.7.2 Dial and pointers. The dial and pointers shall be marked as shown in Figure 1. The form of the letters and numerals on the dial shall conform to MS33558.

3.7.2.1 Fluorescent-luminescent material. The fluorescent-luminescent material shall conform to MIL-L-25142.

3.8 Identification of product.

3.8.1 Nameplate. A nameplate conforming to MIL-N-18307 shall be securely attached to the exterior of the case and shall be marked in accordance with the requirements of MIL-STD-130 except that the FSN shall be omitted.

3.8.2 Manufacturer's part number. The manufacturer's part number on the nameplate shall be identical with the manufacturer's engineering production drawing number including applicable dash numbers if the drawing is tabulated and covers more than one part.

3.9 Installation.

3.9.1 Mounting hardware. The contractor shall furnish mounting screws and self-locking nuts conforming to MIL-N-3336 in sufficient quantity to install the clock. The screws shall be round-head brass machine screws having a durable, lusterless black, oxidized or nickel finish. The length shall be sufficient to mount the clock on panels up to 3/16-inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

3.9.2 Envelope. An envelope furnished by the contractor, containing materials as labeled, shall be packaged with each clock and shall be marked as follows:

IMPORTANT
THIS ENVELOPE CONTAINS MOUNTING
SCREWS AND SELF-LOCKING NUTS

3.10 Workmanship. All details of workmanship shall be in accordance with highgrade aircraft instrument manufacturing practice.

3.11 Design data. No data is required by this specification (other than reports accompanying samples submitted for testing) or by applicable documents referenced in Section 2, unless specified in the contract or order.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspection. The examination and testing of the clocks shall be classified as follows:

a. First article inspection. First article inspection consists of examinations and tests performed on samples which are representative of the production item after award of a contract to determine that the production item conforms to the requirements of this specification (see 3.1 and 4.4 and 4.4.1).

b. Quality conformance inspection. Quality conformance inspection consists of examinations and tests performed on individual products or lots to determine conformance of the products or lots with the requirements set forth in this specification (see 4.5 through 4.5.2).

4.3 Test conditions.

4.3.1 Atmospheric conditions. Unless otherwise specified herein, all tests required by this specification shall be made at an atmospheric pressure of approximately 29.92 inches of mercury and a temperature of approximately 25°C (77°F). When tests are made with

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

atmospheric pressure or temperature substantially different from the above values, proper allowances shall be made for the difference from the specified conditions.

4.3.2 Test position. In tests titled Room temperature rate, Plus 50°C compensation, and Magnetic effect, the clocks shall normally be tested in an upright position and, when so desired by the procuring agency, may be tested at any angle up to and including 20 degrees on either side of the vertical position.

4.3.3 Vibration. A vibration stand shall be used which will vibrate at any desired frequency between 500 and 3,000 cycles per minute and shall subject the instrument to vibration such that a point on the instrument case will describe, in a plane inclined 45 degrees to the horizontal plane, a circle the diameter of which is specified herein.

4.3.4 Watch rate recorder. When specified to use a watch rate recorder for test, the clock shall be fully wound and allowed to run for 1 hour at room temperature. The clock shall then be placed on a watch rate recorder and the rate of the clock shall be checked for at least 5 minutes and noted.

4.4 First article inspection. First article inspection shall consist of all the examinations and tests of this specification.

4.4.1 First article samples. Unless otherwise specified, as soon as practicable, after the award of the contract or order, the manufacturer shall submit three clocks. The samples shall be representative of the construction, workmanship, components, and materials to be used during production. When a manufacturer is in continuous production of these units from contract to contract, submission of further first article samples on the new contract may be waived at the discretion of the procuring activity (see 6.2). Approval of the first article samples or the waiving of first article inspection does not preclude the requirements of submitting to the quality conformance inspection. The first article inspection samples shall be furnished to the Government as directed by the contracting officer (see 6.2).

4.4.1.1 First article test sample identification. The first article test samples shall be plainly identified by durable tags, securely attached, and marked with the following information:

Sample for First Article Test
CLOCK, AIRCRAFT, ELAPSED TIME, CIVIL DATE,
24-HOUR, 2-3/4 INCH DIAL
Submitted by (Manufacturer's name, date) for
First Article test in accordance with MIL-C-6720C(AS)
under contract or order number
MS
Type Number (if any)
Manufacturer's part number

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

4.4.1.2 Upon the completion of the First Article Inspection, all the applicable inspection reports, and when applicable, recommendations and comments pertinent for use in monitoring production shall be forwarded to the cognizant Government activity. One approved First Article Inspection sample shall be returned to the contractor for use in monitoring production.

4.4.2 Tests. The First Article tests of the clock shall consist of all the tests specified under Test methods.

4.5 Quality conformance inspections. The contractor shall furnish all samples and shall be responsible for accomplishing the required inspections. When inspection is conducted at the contractor's plant, all inspection and testing shall be under the supervision of the Government Inspector. Contractors not having laboratory testing facilities satisfactory to the Government shall engage the services of a commercial testing laboratory acceptable to the Procuring Service. The contractor shall furnish test reports showing quantitative results for all tests required by this specification, and signed by an authorized representative of the contractor or laboratory, as applicable. Acceptance or approval of material during course of manufacture shall in no case be construed as a guaranty of the acceptance of the finished product.

4.5.1 Individual tests. Each clock submitted for acceptance under contract shall be subjected to the tests listed below:

Examination of product
Room temperature rate

4.5.2 Sampling tests. One from every 100 clocks or less submitted for acceptance under the contract shall be selected at random by the Inspector and subjected to the following tests:

Plus 5°C compensation
Minus 35°C compensation
Plus 50°C compensation
Run down
Vibration

4.5.3 Acceptance stamp. Each accepted clock shall be marked with the Inspector's acceptance stamp.

4.5.4 Rejection and retest. When any representative sample fails to meet the requirements of the Sampling tests, the lot represented shall be rejected and returned at the contractor's expense. Any clock failing to meet the requirements of the Individual tests shall be rejected and returned at the contractor's expense. Clocks which have been rejected may be replaced or repaired to correct the defects and resubmitted for all specified tests. Before resubmitting, full particulars concerning previous rejection and the action taken to correct the original defects shall be furnished to the Inspector. Units rejected after retest shall not be resubmitted without the specific approval of the Procuring Service.

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:20Z
Check the source to verify that this is the current version before use.

4.6 Test methods.

4.6.1 Examination of product. Each clock shall be carefully examined to determine conformance with all the requirements of this specification not covered by tests.

4.6.2 Room temperature rate. The clock shall run for 1 day to break in the parts. The clock shall then be fully wound and its daily rate determined for a period of 8 consecutive days. On the second day of the Room temperature rate test, the sweep second hand shall run for approximately 5 hours. On the third day, the elapsed time hands shall run for approximately 5 hours. On the fourth day and each day thereafter until completion of the test, the sweep second hand and the elapsed time hands shall run for approximately 5 hours. The clock shall not be rewound during this test period. The average daily rate shall not exceed 30 seconds per day. The variation of any daily rate from the average daily rate shall not exceed 15 seconds per day.

4.6.3 Plus 5°C compensation. The clock shall be fully wound and allowed to run for a period of not less than 8 hours and not more than 24 hours prior to the beginning of this test. The clock shall then be subjected to a temperature of approximately +5°C (+41°F) for a period of 20 hours with the chronograph and elapsed time hands in operation. Its daily rate shall be observed. The daily rate shall not differ from the average daily rate of the Room temperature rate test by more than 15 seconds per day.

4.6.4 Minus 35°C compensation. Within 24 hours after the completion of the Plus 5°C compensatation test and without rewinding, the clock shall be subjected to a temperature of approximately -35°C (-31°F) for a period of 20 hours with the chronograph and elapsed time hands in operation. Its daily rate shall be observed. The daily rate shall not differ from the average daily rate for the Room temperature rate test by more than 45 seconds per day.

4.6.5 Plus 50°C compensation. Within 24 hours after completion of the Minus 35°C compensation test and without rewinding, the clock shall be subjected to a temperature of approximately +50°C (+122°F) for a period of 20 hours with the chronograph and elapsed time hands in operation. Its daily rate shall be observed. The daily rate shall not differ from the average daily rate for the Room temperature rate test by more than 20 seconds per day.

CAUTION: The compensation tests shall be conducted so as to prevent condensation of moisture on the mechanisms.

4.6.6 Run down. The clock shall be fully wound and allowed to run down. The number of days required for the clock to run down shall not be less than 8 days.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:20Z
Check the source to verify that this is the currentversion before use.

4.6.7 Vibration. The clock shall be subjected to vibration on a suitably designed vibration stand for approximately 24 hours with all hands operating, and shall be fully wound at the beginning of this test period. The oscillation of the hands shall not be greater than 1/32 inch at the tip of the hour, minute, and sweep second hands. The daily rate shall not differ from the average daily rate for the Room temperature rate test by more than 45 seconds per day.

4.6.8 Vibration endurance. The clock shall be subjected to vibration on a vibration stand for 3 hours at a frequency of 2,000 cycles per minute so that a point on the clock describes a circle of 0.018 to 0.020 inch diameter. At the completion of this test the Room temperature rate test shall be repeated, and the daily rate of the clock shall be within the tolerances specified therein increased by 50 percent. No screws or other parts shall become loose nor damaged as a result of the vibration.

4.6.9 Humidity. The clock shall be tested in accordance with Procedure I of MIL-E-5272. The total test time shall be 120 hours (5 cycles). After the clock has returned to room temperature for a minumum period of 4 hours, it shall be carefully examined, and there shall be no evidence of damage, corrosion, or deterioration which will affect subsequent operation. The clock shall be fully wound and operated for a period of 6 hours. The clock shall not gain nor lose more than 15 seconds during this period.

4.6.10 Fungus resistance. The clocks shall be tested in accordance with Procedure I of MIL-E-5272 except that the test period shall be 14 days. After the testing procedure has been completed, any evidence of growth of fungi found upon inspection shall be cause for rejection of the clock.

4.6.11 Salt spray. The clock shall be subjected to a watch rate recorder test and then be subjected to a Salt spray test in accordance with MIL-E-5272, Procedure I. At the end of this period the clock shall be carefully examined for any evidence of corrosion and damage that will affect the operation of the clock. The clock shall be fully wound and operated for a period of 6 hours. The clock shall not gain or lose more than 15 seconds during this period.

4.6.11.1 At the completion of all the above specified tests, the Room temperature rate test shall be repeated and the clock shall run for at least 7 days and the daily rate shall not exceed twice the daily rates specified for the Room temperature rate test

4.6.12 High temperature exposure. The clock shall be tested in accordance with Procedure I of MIL-E-5272. The test period shall be 24 hours. At the end of the 24-hour period, and while still at the high temperature, the clock shall operate without indications

Source: https://assist.dla.mil -- Downloaded: 202610-17T07:20Z
Check the source to verify that this is the current version before use.

of sticking or erratic action. After the chamber has been returned to room temperature and the clock has saturated at room temperature for a minimum period of 4 hours, it shall be carefully examined for evidence of damage which would adversely affect subsequent operation. The clock shall then be fully wound and operated for a period of 6 hours. The clock shall not gain nor lose more than 15 seconds during this period.

4.6.13 High altitude - low temperature. The clock shall be fully wound and allowed to run for at least 12 hours, then placed in an altitude chamber maintained at a temperature of -65°C (-85°F) and the pressure reduced to simulate an altitude condition of 50,000 feet (3.4 inches of mercury absolute pressure) for a period of 4 hours. The clock shall then be returned to normal atmospheric pressure and a temperature of -65°C (-85°F) for an additional period of 44 hours. After returning to room temperature, the clock shall be carefully exmained for any evidence of damage and shall be checked on a watch rate recorder. The clock shall then be fully wound and operated for a period of 6 hours. The clock shall not gain nor lose more than 15 seconds during this period.

4.6.14 Operation in magnetic field. The daily rate of the clock shall be determined under the following conditions in the order given:

a. In a magnetic field of a horizontal strength of from 0.15 to 0.22 oersted.

b. In a magnetic field of a horizontal strength of approximately 2.4 oersted.

c. In a magnetic field of a horizontal strength of from 0.15 to 0.22 oersted.

The daily rates during this test shall be determined by means of a watch rate recorder. Duration of each run shall be at least 5 minutes. The clock shall be in the horizontal dial-up position during this test. The daily rates under conditions (b) and (c) shall not differ from the daily rate under condition (a) by more than 10 seconds.

4.6.15 Magnetic effect. The clock shall be held in various positions with its nearest part 6 inches from the center of a short barmagnet compass which shall be set up in a uniform magnetic field whose horizontal intensity is between 0.17 and 0.19 oersted, The various positions shall be so chosen as to include that position which causes the maximum deflection of the compass. The maximum deflection shall not exceed 5 degrees.

Source: https://assist.dla.mil -- Downloaded: 202640-17T07:20Z
Check the source to verify that this is the currentversion before use.

4.6.16 Clock mounting lugs. The clock case, with mechanism removed, shall be mounted face downward on the movable head of a suitable testing machine with the face of the case in a horizontal plane so that the mounting lugs receive no added support. A suitable pin shall be inserted through the hole in the mounting lug and attached to a pull strap in the stationary head of the machine. A load of 175 pounds shall be applied for 1 minute to each lug in a direction toward the front of the case. The lugs shall withstand the applied load without fracture.

5. PACKAGING

5.1 Packaging. The clocks shall be packaged in accordance with MIL-STD-794, Level A or C as specified in contract or order (see 6.2). For Level A packaging the method of preservation shall be in accordance with MIL-P-116, Method 1A-5, without preservative compound (using metal reusable containers).

5.2 Packing. The clocks shall be packed in accordance with MIL-STD-794, Level A, B, or C as specified in contract or order (see 6.2).

5.3 Marking. The interior and exterior containers shall be marked as specified in MIL-STD-794.

5.3.1 Precautionary marking. The following precautionary markings shall appear on two opposite sides of each interior package and shipping container wherever practicable.

FRAGILE
DELICATE INSTRUMENTS
HANDLE WITH CARE

6. NOTES

6.1 Intended use. The clocks covered by this specification are intended for use on aircraft, but are not intended for precision navigation.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.

b. The quantity, MS part number and type number, if any, of the instrument desired.

c. Levels of packaging (see 5.1) and packing (see 5.2) desired.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

d. The laboratory that shall conduct tests (see 4.4).

e. Whether First Article is waived, the number of samples required, and the name and address of the First Article laboratory (see 4.4.1).

6.3 Drawing requirements. The attention of contractors is invited to the fact that Government contracts for equipment, whether procured directly by the Government or through another contractor, require that all drawings submitted must be in accordance with the requirements of MIL-D-1000.

6.4 When a first article is required, it shall be tested under the appropriate provision of 7-104.55 of the Defense Acquisition Regulations. The first article should be a sample selected from the initial production items. The contracting officer should include specific instructions in all procurement instruments, regarding arrangements for examinations, test and approval of the first article.

6.5 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the Defense Acquisiton Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of DAR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
4.4.1.2	First Article Inspection Reports	DI-T-5329 - Inspection Test Reports

Custodians:
Navy - AS

Preparing Activity
Navy - AS
(Project No. 6645-N342)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE MIL-C-6720C(AS)
CLOCK, AIRCRAFT, ELAPSED TIME, CIVIL DATE, 24-Hr, 2 3/4 INCH DIAL

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

Replaces edition of 1 Jan 72 which may be used.

S/N 0102-LF-001-4260

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T07:20Z
Check the source to verify that this is the current version before use.