AA-D-00191E(GSA-FSS)
July 10, 1970
SUPERSEDING
Int. Fed. Spec. AA-D-00191D(GSA-FSS)
November 10, 1965 and
INTERIM REVISION OF
Fed. Spec. AA-D-191A
August 4, 1955

INTERIM FEDERAL SPECIFICATION

DESKS, STEEL, GENERAL OFFICE

This Interim Federal Specification was developed by General Services Administration, Federal Supply Service, Washington, D.C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-D-191A, dated August 4, 1955.

1. SCOPE AND CLASSIFICATION

1.1 Scope. The flat top four leg desks covered by this specification are of the Federal standard general office type.

1.2 Classification.

1.2.1 Types, classes, and styles. The desks shall be of the following types, classes, and styles.

Type I. Clerical desks.

Class 1. Double-pedestal - 60 inches wide by 34 inches deep by 30-1/2 inches high.
Class 2. Single right pedestal - 45 inches wide by 34 inches deep by 30-1/2 inches high.

Type II. Secretarial desks.

Class 1. Double-pedestal - 60 inches wide by 34 inches deep by 30-1/2 inches high.

Style A. Typewriter compartment in left pedestal.

Style B. Typewriter compartment in right pedestal.

Class 2. Single right pedestal - 45 inches wide by 34 inches deep by 30-1/2 inches high, with fixed typewriter bed on left.

2. APPLICABLE DOCUMENTS.

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative and Nondecorative.
AA-F-359 - Filing Cabinets, Steel, Legal and Letter Size, Vertical.
QQ-P-416 - Plating, Cadmium (Electrodeposited).
QQ-Z-325 - Zinc coating, Electrodeposited, Requirements For.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
LLL-L-354 - Linoleum, Desk-top.
PPP-P-00225 - Desk, General Office, Steel, Packaging, Packing, and Marking of.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Use).
Fed. Std. No. 595 - Colors.
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams and Joints (Sheet Steel).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-W-12332 - Welding, Resistant, Spot and Projection for Fabricating Assemblies of Low-Carbon Steel.

Military Standards:

MIL-STD-20 - Welding Terms and Definitions.
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking for U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specification procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Iron and Steel Institute Publication:

Steel Products Manual, Carbon Steel Sheets.

(Application for copies may be addressed to the American Iron and Steel Institute, 150 East Forty-Second Street, New York, New York 10017).

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel sheets used for all exposed parts and tops shall be of commercial quality cold rolled steel with a stretcher level standard of flatness as defined in the Steel Producers Manual, Carbon Steel Sheets. Other sheets may be cold rolled oiled, hot rolled pickled and oiled, or hot rolled annealed and shall stand the bend test specified in 4.4.5. The steel shall be smooth, free from rust, scale, pits, scratches, laps and buckles affecting strength or appearance. The gage numbers specified are the Manufacturer's Standard gages for steel sheets. The decimal equivalents shown for the steel thicknesses are subject to the standard tolerances or ordering limits, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.2 Linoleum. The linoleum shall conform to Type I or Type II of Federal Specification LLL-L-354, and shall be furnished without transparent factory finish. The thickness of the linoleum shall be not less than 0.075 inch. The linoleum color shall be gray. Samples of the standard color of linoleum are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D.C. 20407; or from the Business Service Center of the nearest GSA Regional Office.

3.2.3 Plastic laminate sheet. The plastic laminate sheet shall conform to the requirements of L-P-508, Style D, type I, Grade HP, Class 1. The plastic laminate sheet shall be 0.062 inch thick with a plus or minus tolerance of 0.005 inch. The color (white), pattern (leather), and finish shall match the standard adopted by the Federal Supply Service, General Services Administration. Samples of the standard plastic laminate are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D.C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

3.2.4 Hardware.

3.2.4.1 Face Hardware. The face hardware shall be satin finished anodized aluminum; or type 302 corrosion resistant steel, or stain finished chromium on steel or on die-cast zinc, brass or bronze. Brush or grind marks shall not be visible on the exposed surfaces of finished face hardware. The exposed surfaces of all pulls and foot sockets used on a single unit shall be finished to match each other within the limits of the base material and protective plating used. The exposed surfaces of all face hardware shall be free of sharp edges, burrs, pits, nicks and scratches.

3.2.4.2 Foot Sockets. Foot sockets shall be of the material specified in 3.2.4.1. The steel foot sockets shall be not less than 0.0299 inch thick and aluminum foot sockets shall be made from not less than 0.039 inch thick aluminum. The foot sockets shall be not less than 1-1/2 inches high and shall be formed to conform to the shape of the leg. The foot sockets shall be flush with, or slightly inset the outside surface of the leg and shall be firmly secured by recessed fasteners which are designed to protect floors and to be removable with simple tools. There shall be no fastenings on the surfaces of the foot sockets that are adjacent to the two outside surfaces of the legs.

3.2.4.3 Locks. When specified, (see 6.2), the center or control drawer shall have a disk tumbler lock, not less than 3/4 inch diameter tube, operated by a grooved key. The face of the locks shall be as specified in 3.2.4.1. Each lock on any order up to 200 desks shall be of a different key change in that no one key will open more than one of the 200 locks. Duplicate keys shall be furnished with each lock. When the locking drawer is locked, it shall control a positive locking device capable of locking all drawers in one operation, and also permit closing and locking any drawer after the control drawer is locked, without distorting the locking mechanism. Unlocking the control drawer shall automatically unlock all other drawers, permitting the opening of any drawer without opening the unlocked control drawer beyond the overhang of the desk top. It is not required that desks ordered without locks have provisions for installing locks at a later date.

3.2.4.4 Drawer Pull. The drawer and typewriter door pulls shall be as specified in 3.2.4.1, and shall be similar to the designs shown in figure 3. Pulls shall be securely attached with nuts and lockwashers which shall be surface mounted if attached to the inside of the drawer outer head or shall be recessed if mounted to the inside head of the drawer front.

3.2.4.5 Binding Strip. The binding strip material shall be as specified in 3.2.4.1. It shall have not less than a 3/16 inch quarter round bead or a rounded bead not less than 11/64 inch high by 7/64 inch wide. The inside edge of the bead of the binding strip shall be shaped to conform to the edge of the top material. The insetting web of the binding strip shall be flanged, embossed or serrated to grip the edge molding and top plate when in place. The top of the binding strip shall not project above the surface of the top covering at any point along the perimeter of the desk top. The binding strip shall lap at least 0.031 inch of the top covering. The binding strip shall be either flush with the outside of the edge mold or may extend outside the edge mold by not more than 1/16 inch.

3.2.5 Typewriter platform mechanism. The typewriter-platform mechanism shall be constructed of steel, having sufficient structural strength and designed to withstand the load test specified in 4.4.1. The mounting of the mechanism and platform shall also be included in the test. The mechanism shall be properly spring counter-balanced and shall have a readily accessible, positive metal locking device which operates automatically or be a hand-operated locking lever. The platform shall be held rigidly in place in the elevated position and function satisfactorily in its operations. The bottom of the platform, in raised position, shall be not less than 24 inches above the floor and shall be free of any obstacles which interfere with the user of the typewriter. The top of the typewriter platform in raised position shall be 26-1/2 inches above the floor. Delrin (plastic) rollers may be utilized in the construction of the platform mechanism, provided they do not drag or bind during the operation of mechanism. The mechanism shall operate easily and smoothly with the typewriter in place

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

and shall have ample clearance for all standard, correspondence model typewriters when lowered into the pedestals. The mechanism shall be smoothly finished with lacquer, zinc, cadmium plating or enamel and moving parts shall be lubricated properly. A label shall be permanently affixed to the back of the compartment door captioned "Warning" or "Caution" and setting forth complete operating instructions for the typewriter platform mechanism.

3.2.6 Finishing materials.

3.2.6.1 Primer. The primer, when used, shall be compatible with the finishing enamel.

3.2.6.2 Enamel. The enamel shall be of the baking type in accordance with the manufacturer's commercial product. The color shall be as specified in 3.2.6.2.1, except for the bottom of the top plate, which may be a commercial shade of gray.

3.2.6.2.1 Color of Finish. Unless otherwise specified (See 6.2), the color of the finish shall be gray, Color No. 26134 of Federal Standard No. 595. Sample panels of the standard color are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D.C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

3.3 Construction.

3.3.1 Design. The design and dimensions of the desks shall be as shown in figures 1 and 2, which illustrate the general exterior appearance.

3.3.2 Tolerance. The following tolerances shall be permitted unless otherwise specified:

Width and depth of top, plus or minus 1/8 inch.
Height of top, plus or minus 1/8 inch.
Overhang of top equal (plus or minus 1/8 inch) at front, back and ends of pedestal.
Height of top of typewriter platform without load plus or minus 1/2 inch.

3.3.3 Spot Welding. Spot welds shall not be closer to the edge of either adjoining member than 1/2 the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.4.4. All depressions, pits or raises on exposed surfaces due to welding shall be filled and sanded, or ground smooth. When spot welding components together, the end welds in any given series of welds shall be centered not more than 1/2 inch from the end of the flange or piece being welded, unless obstructions interfere, or unless otherwise specified herein.

3.3.4 Definition of terms used herein.

3.3.4.1 Welding terms. All spot welding and electrical resistance welding shall be as defined in Military Standard MIL-STD-20. Definitions of these terms in MIL-STD-20 are as follows:

Resistance welding: A group of welding processes wherein coalescence is produced by the heat obtained from resistance of the work to the flow of the electric current in a circuit of which the work is a part, and by the application of pressure.

Spot welding: A resistance welding process wherein coalescence is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes. The size and shape of the individually formed welds are limited primarily by the size and contour of the electrodes.

Fusion welding and brazing shall be defined as follows:

Fusion welding: Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from an external source.

Brazing: Brazing is the joining of metals with the aid of a filler metal of a different composition having a melting point above 800 degrees Farenheit. Brazing method shall include using nickel bronze rod conforming to Type I, Class RCuZn-D of QQ-R-571 and having a minimum tensile strength of 70,000 p.s.i.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.4.2 Fabricating terms. All bends, forms, seams and joints of the metal specified herein shall be as defined in Federal Standard No. 187.

3.3.5 Assembly. The joining of all members shall result in a compact unit of sufficient strength to prevent distortion, breakage or loosening of any part of the desks during heavy duty daily usage and to withstand rough handling in moving while fully loaded. Legs shall be secured to the pedestal and end panels by bolts, nuts and lockwashers, or extruded holes and self-tapping screws, or shall be of the slip-on type, being securely held in place by either spring clips continuous across the top of the leg, (individual clips are not permitted), or brackets the full height of, and welded to the pedestal and end panel. The desk chassis, (entire desk minus the top), shall be a free-standing unit, reinforced front and rear, and held securely in line by 16 gage (0.0598 inch) chassis tie members. These tie members shall be formed with not less than two bends, (an offset formation shall be considered as one bend and only one offset is permitted per tie member), and shall be attached directly to the top of the assembled pedestals and directly or indirectly, (by use of not less than 14 gage steel brackets), to the top of the assembled end panels. The attachment of each tie member to the desk chassis shall be by not less than four machine screws, or bolts, with nuts and lockwashers; positioned and reinforced, if necessary, to provide maximum stability to the chassis. Alternatively, the chassis tie members may be omitted provided the desk top is constructed in accordance with the alternative construction specified in para. 3.3.6. The desk top shall be securely attached to the chassis with machine screws, bolts, nuts and lockwashers, or thread forming screws and extruded holes in such a manner as to prevent vertical and horizontal movement (that is independent of the rest of the desk) of any part of the top under hand-applied lift, pressure, push, and pull. Bolt holes shall not exceed the diameter of the bolt to be used therein by more than 1/16 inch, or, the holes may be elliptical with the dimension of the minor axis not exceeding 1/32 inch and the dimension of the major axis not exceeding 3/16 inch over the diameter of the bolt to be used therein. Welding for subassemblies shall be as specified herein.

3.3.6 Top. All top plates shall be of not less than 16 gage, (0.0598 inch), steel of the type specified in 3.2.1 and shall be rigidly reinforced to conform to the test specified in 4.4.2. A reinforcing gusset of 16 gage (0.0598 inch) steel, angle shaped and not less than 12 inches in length shall be centered on the butt joined edge molding and shall be securely spot welded on not less than 2 inch centers to the inside bottom and side of the edge molding. Two of the top reinforcing members shall have a formation consisting of a channel plus a flange, and shall be not less than 17 inches long and shall be of not less than 18 gage steel. They shall be centered on the inside of the edge molding on the sides of the top and securely welded to the top plate. One of the top reinforcing members shall have a formation consisting of a channel plus a flange. The side without the flange shall extend inside the edge of the molding at the rear of the top. The reinforcement shall be secured to the edge molding at the rear of the top and to the top plate by welding. One of the top reinforcing members shall have a formation consisting of a channel plus a flange. The side without the flange shall extend inside the edge of the molding at the front of the top. The reinforcement shall be secured to the edge molding by the pressure of the formation and secured to the pedestal chassis by bolts, nuts, and lockwashers. The reinforcing members which are parallel to the long edges of the top and are welded to the top plate shall also abut and be welded or brazed to the channel-plus-flange reinforcements which are parallel to the sides of the top. When the alternate method of mounting the top indicated in 3.3.5 is used, the top shall have not less than seven reinforcing members containing not less than two 90 degree bends each, spot welded to it. Five of these reinforcements shall be placed parallel to the front and rear edges of the top, and two of them shall be placed parallel to the side edges. The four reinforcements closest to the edge molding shall be not less than 18 gage (0.0478 inch) steel, and the other three reinforcements shall be not less than 20 gage (0.0359 inch), steel. As a second approved alternate top construction, the top shall have not less than five reinforcements of not less than 18 gage, (0.0478 inch), steel. Two of these reinforcements shall be channel shape and shall be not less than 17 inches long. They shall be centered on and securely welded to the inside of the edge molding on the sides of the top. Two of the reinforcements shall have a formation consisting a channel plus a flange, shall have a formed width of not less than 5-1/2 inches, and shall be securely welded to the top plate. One of these reinforcements shall have the side without the flange extend inside the edge molding at front of the top and the reinforcement shall have the side without the flange extend inside the edge molding at the rear of the top. Each of these reinforcements shall extend inside the edge molding at the sides of the top and shall be secured to the edge molding by brazing at two points at each end, or by mechanical-inert gas (MIG) welding at not less than 5 points. Two of these five points shall be not more than three inches, (in each direction), from each corner. The fifth point shall be midway between the corners. Each braze shall be not less than 3/4 inch in length and each MIG weld shall be not less than 1/4 inch in diameter. The fifth reinforcement shall be a hat section formation, shall have a formed width of not less than 5-1/2 inches, shall be centered (front to rear) on the top, and shall be securely welded to the top plate. This reinforcement shall inset the lower edge of the edge molding by not less than 1/32 inch at one end and shall abut, (touching or with not more than 0.030 inch gap), the lower edge of the edge molding at the other end.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

This center reinforcement shall be securely attached to the edge molding by brazing or MIG welding, at the joint of the edge molding at each end. These alternate top constructions shall also conform to the test requirements specified in 4.4.2. The top plate shall be covered with linoleum as specified in 3.2.2 which shall be permanently bonded to the entire top plate surface by an adhesive recommended by the linoleum manufacturer. When specified, the top plate shall be covered with plastic laminate sheet as specified in 3.2.3, in lieu of linoleum. The plastic laminate shall be bonded uniformly to the top plate by an adhesive recommended by the adhesive manufacturer or the plastic laminate manufacturer for use with metal and plastic laminate. The plastic laminate shall be applied at a controlled temperature and sufficient pinch roller pressure (see 6.3) to insure a permanent bond between the plastic laminate and the entire top plate surface. A back-up under the top is required as a part of the rolling process. The steel top plate shall support the entire undersurface of the desk top covering material and shall be properly cleaned prior to application of the adhesive. The over-all height of the edge molding and the binding strip shall be not less than 1.40 inches. The edge molding shall be not less than 18 gage (0.0478 inch), or may be composed of two component parts, which, when assembled, equal or exceed 18 gage (0.0478 inch) in thickness and rigidity. The binding strip specified in 3.2.4.5 shall be securely held in place but permit removal and shall closely fit the top material along the perimeter of the top. A press fit of the binding strip will not be considered secure. When assembled to the top, the binding strip shall be positioned and engaged between the top plate and edge molding in such a manner as to prevent the binding strip from moving against and damaging the top covering material upon receipt of shipping and moving impacts, (the force of which is expected to be up to, but not including the force which visibly damages or deforms the edge molding). For all desks except the type II, class 2 desk, the binder strip shall be of not more than two pieces each, and shall be butt joined on either end or both ends of the desk. For the type II, class 2 desk, the exposed binder strip may be of more than two pieces. All corners of the top shall be rounded on not less than a 3/4 inch radius. The overhang of the top beyond the pedestal shall be equal on all sides and ends and shall not exceed 1 inch as measured from the pedestal panel or pedestal front.

3.3.6.1 Control panels for plastic tops. When a plastic laminate top is specified, two sample control panels 12 inches by 24 inches shall be prepared under plant conditions, for each 1,200 tops processed (more often if so directed by the Government to effect better quality control) using the steel sheet, plastic laminate and adhesive materials and the same time-temperature-pressure cycle as used for the desk tops. Test specimens from the sample control panels shall show no evidence of delamination, blistering, cracking or crazing when examined after the test specified in 4.4.10.

3.3.7 Drawers. The number, kind and minimum inside clear dimensions of the drawers required shall be as shown on figures 1 and 2 and as specified herein. The drawer fronts shall fit square in the drawer opening horizontally and vertically, and shall show equal opening between the drawer front and pedestal frame, on the sides and top when the drawers are closed. When in closed position the drawer fronts shall be flush with the face of the pedestals, or, alternatively, shall inset the face of the pedestal not more than 1/16 inch. Storage drawers, when open, shall extend not less than 20 inches from the inside front of the drawer to the front of the pedestal. The letter filing drawer shall extend, when open, not less than 20-3/4 inches from the inside front of the drawer to the front of the pedestal and shall have not less than 22-3/4 inches of open and easily accessible, clear filing space. Spot welds for all drawer body assemblies shall be on not more than 4-inch centers. The file drawer shall have one or two pulls, at the discretion of the manufacturer. Provision shall be made in the file drawer body for a follower-block (compressor). The drawers shall satisfy the test requirements in 4.4.6, 4.4.7, 4.4.8, and 4.4.9.

3.3.7.1 Drawer fronts. The drawer fronts shall be of double wall construction. The top edge of the outer front shall be formed in a return flange to receive the inner drawer front. The side and bottom edges shall be formed in a return flange and an additional 90 degree flange to provide for welding to the drawer body (See Figure 4). The outer fronts of storage and center drawers shall be not less than 20 gage (0.0359 inch) steel if only the outer wall is used in attaching the drawer pull, or may be 22 gage (0.0299 inch) if the drawer pull is attached to both the inner and outer drawer fronts. The file drawer outer front shall be 20 gage (0.0359 inch) for all construction. All corners of the outer drawer fronts shall be neatly closed and free of sharpness and burrs with the top corners brazed and ground smooth along the entire mitered seam. The inner drawer front shall be of not less than 24 gage (0.0239 inch) steel, flanged on all edges, and the top edge shall interlock with the top channel of the outer front and the bottom edge shall be held in place by extrusions in the drawer bottom. Alternatively, bottom extrusions may be omitted when the inner drawer head is secured by the drawer pull and the attaching point is recessed. Also, alternatively, the side flange may be omitted from the inner drawer front provided the latter has a channel formation, not less than 1-1/4 inches wide, extending full length of the inner drawer front, and centered on the attaching point.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.7.2 Drawer bodies. The storage and center drawer bodies shall be formed from one piece of not less than 24 gage (0.0239 inch) steel. Alternatively, the center drawer body, back, and hood, shall be made of one piece of 24 gage (0.0239 inch) steel. When constructed in this manner, all requirements governing the hood construction in the last four sentences in paragraph 3.3.7.3 remain applicable. The file drawer body shall be formed from one piece of not less than 22 gage (0.0299 inch) steel. Alternatively, the file drawer body may be of 24 gage (0.0239 inch) steel, provided there is a channel formation extending full depth and centered on the bottom of the drawer body. The top edge of all drawer sides shall be beaded, channeled or folded for safety and reinforcement. All storage drawer sides shall be not less than 4-3/4 inches high and letter file drawer sides shall be not less than 5-3/4 inches high. All storage drawers shall have provision made for adjustment of crosswise partitions at intervals of 1 inch maximum. The adjustments shall permit the partition(s) to locate not more than 3-1/2 inches from the drawer front and 1-3/4 inches from the inside of the drawer back.

3.3.7.3 Drawer backs. The back of all storage drawers shall be securely welded to the drawer sides and bottoms, and shall be not less than 24 gage (0.0239 inch) steel, with the top edge formed for additional strength. The back of the file drawer shall be not less than 18 gage (0.0478 inch) steel welded square to the drawer sides and bottom. Spot welding of the backs of both storage drawers and file drawers to the drawer bodies shall be through 90 degree flanges in either the backs or the bodies. The height of the drawer backs shall be the same as the height of the bodies, with a tolerance of minus 1/8 inch. The back and the hood of the center or knee-space drawer shall be formed from one piece of steel not less than 22 gage (0.0299 inch). In all desks without locks and in desks with locks in which the reinforcements that are welded to the top line up with the rear of the center drawer in such a manner as to prevent pilfering of material from the drawer when it is in the locked position; the hood shall be not less than 1-1/2 inches wide. Otherwise the hood shall be not less than 4 inches wide. In either case, the hood shall be flanged inward on the horizontal ends and spot welded to the drawer sides. The full width of the front edge of the hood shall be formed for strength.

3.3.7.4 Convenience tray. The center or knee-space drawer on all Type I desks and on Type II, class 1 desks shall be equipped with a convenience tray which shall extend the full width of the drawer. The tray shall have not less than three compartments 3 inches long and one pencil compartment for type I desks, and not less than two 3-inch compartments and one pencil compartment on type II, class 1 desks. The tray shall be not less than 1-1/4 inches high and 2 inches wide. Divider flanges shall not be welded to the inside (storage side) of the tray compartments.

3.3.7.5 Follower-Block (Compressor). The follower-block shall be controlled by spring tension and shall operate easily within the drawer when released and be held firmly when engaged. The clearance between the follower-block and its track or guide shall be kept to a minimum, so as to prevent the follower-block from facing off at an angle and out of square with the drawer sides when in operation, and from seating out-of-square when engaged. The compressor plate shall be not less than 18 gage (0.0478 inch) steel and shall be free of burrs and rough or sharp edges on all sides. If there is no formation along the top edge, the two top corners shall be notched on a radius to eliminate sharpness. The tension release lever shall be not less than 20 gage (0.0359 inch) steel, shall be smoothly formed and reinforced for strength and for convenience of releasing. That part of the follower-block which provides the gripping or engaging action shall not be serrated unless this action is accomplished with rollers, which shall be serrated. One follower-block shall be furnished with each file drawer.

3.3.7.6 Drawer partitions and stationary trays. The drawer partitions shall be of not less than 20 gage (0.0359 inch), steel with the top edge having a bead or flat fold when single wall construction is used. Alternatively, single wall partitions may be of not less than 22 gage (0.0299 inch) steel provided they are reinforced by not less than four horizontal embossings extending the full width of the partition and the top edge is formed to eliminate a sharp edge. Double wall partitions shall be of not less than 24 gage (0.0239 inch), steel with a rounded top edge and not less than two reinforcing dimples for welding the two walls together. Two partitions shall be furnished for each storage drawer which shall fit securely into the adjustment feature of the drawers sides. All type II desks shall have a sloping stationery compartment in one drawer containing not less than four trays. The trays shall be not less than 3/4 inch apart and shall accommodate adequately 8-1/2 by 11 inch paper. The top edge of sloping trays including cut-out portion (when so designed) shall be folded or beaded to protect fingers and the bottom edge shall be flanged up, fitting tightly against the tray above to prevent papers from slipping between the trays or between the tray and the drawer bottom. The trays shall interlock with each other, making them a single, four compartment unit which shall in turn, interlock with the drawer partition; or the trays and the partition may be welded, making them a single unit. The tray assembly shall fit snugly into any storage drawer, maintaining the proper slope.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.8 Drawer suspensions and stops. The storage and center drawers shall operate on slide suspensions, with nylon glides, of the type specified in 3.3.8.1. The file drawer shall operate on a progressive side-arm suspension, or on a progressive cradle suspension of the types specified in 3.3.8.2 or 3.3.8.3, or on a roller channel suspension as specified in 3.3.8.5. The suspensions shall comply with the tests specified in 4.4.6 and 4.4.7. The stops for the center, storage, and file drawers shall be as specified in 3.3.8.7.

3.3.8.1 Slide Suspension. The case track shall be of not less than 16 gage (0.0598 inch) steel formed channel shape and shall be secured to the pedestal inside vertical reinforcements as specified in 3.3.8.4. The drawer track shall be of not less than 16 gage (0.0598 inch) steel formed channel or "Z" shape with the bends so located as to provide maximum strength to the bearing surface. Alternatively, drawer track may be 18 gage (0.0478 inch) steel provided the track is formed with a channel and flange formation, (not less than 3 bends) and provided one flange is spot welded to the drawer side and the other is spot welded to the drawer bottom. All drawer track flanges and surfaces welded to the sides or bottom, (or both sides and bottom), of the drawers as specified above shall be by two rows of spot welds on not more than 4 inch center, or alternatively, by one row of staggered spot welds on not more than 3 inch centers diagonally measured. Alternatively, the storage drawer track may be formed as an integral part of the drawer body provided the total metal thickness on the bearing surface is equal to or exceeds 16 gage (0.0598 inch) steel in thickness, and a steel channel or zee formation in structural rigidity. There shall be a sufficient number of nylon glides on each suspension, positioned to eliminate metal-to-metal contact between drawer and case tracks and to satisfy the pull test specified in 4.4.7. The glide shall be designed to insure against the head shearing off during operation of the drawer or while removing and inserting the drawer. The glide design shall also insure against loosening or falling out.

3.3.8.2 Progressive side-arm suspension. The steel used for the neutral members shall be not less than 16 gage (0.0598 inch) and as specified in 3.2.1. After forming to shape, the neutral members shall be cadmium plated in accordance with QQ-P-416, Type I, Class 3 or zinc plated in accordance with QQ-Z-325, Type I, Class 3. Alternatively, black oxide coating may be used, provided the entire member is then coated with a clear organic finish which dries to a hard film. There shall be at least five solid steel balls or four rollers on each neutral member. The balls and rollers shall be as specified in 3.3.8.6. When rollers are used, at least three of them shall be the fixed journal ball bearing type and the other roller(s) shall be the plain or solid steel stud bearing type. If the design of the suspension is such that a separate housing is required for rollers or balls, the housing shall be of not less than 16 gage (0.0598 inch) steel, welded to the neutral member at each end by not less than two spot welds. Balls or rollers shall be incapable of dislocation or removal unless the suspension is intentionally dismantled.

3.3.8.3 Progressive cradle suspension. This type shall have two neutral members and not less than two tie members, all of which shall be not less than 16 gage, (0.0598 inch) steel as specified in 3.2.1. The neutral members and tie members shall be joined by not less than two spot welds at each connection. After forming to shape, all members shall be cadmium or zinc plated, (except for areas burned during the welding process), or shall be coated with black oxide as specified in 3.3.8.2. Each neutral member shall have at least four rollers, three of which shall be the fixed journal ball-bearing type and the other roller(s) shall be the plain or solid steel stud bearing type, (see 3.3.8.6). Rollers shall be incapable of removal or dislocation unless the suspension is intentionally dismantled.

3.3.8.4 Drawer and case tracks (Progressive suspension). The file drawer and case tracks for the progressive suspension shall be hot or cold rolled 14 gage (0.0747 inch) thick steel. After forming to shape, the drawer and case tracks shall have a Rockwell hardness of not less than 70 nor more than 85 on the "B" scale, or equivalent hardness on a comparable scale. All outer surfaces of the drawer and case tracks shall be finished in accordance with 3.2.6 and 3.4. The case tracks shall be secured to at least the front and rear pedestal interior reinforcing members by interlocking of lugs on the case tracks into appropriate openings in the interior reinforcing members. The interlocking shall provide secure connections without vertical or horizontal movement. Alternatively, the case tracks may be welded or bolted to at least the front and rear pedestal interior reinforcing members to provide a comparable connection. The drawer tracks shall be attached to the drawer sides by spot welding as specified in 3.3.8.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.8.5 Drawer and case tracks (Roller channel suspension). The file drawer tracks and case tracks for the roller channel suspension shall be of 16 gage (0.0598 inch) 1010-1020 commercial grade cold rolled steel. They shall be formed channel shape or, alternatively, shall be formed Z-shape. This suspension shall contain not less than four rollers, (2 front rollers and 2 rear rollers), as specified in 3.3.8.6. The drawer members and case members shall not contact each other during the operation of the drawer. Nylon glides of the type specified in 3.3.8.1 shall be used to prevent metal-to-metal contact if this requirement is not inherent in the suspension. The drawer tracks and case tracks shall be finished in accordance with 3.2.6 and 3.4.

3.3.8.6 Rollers and solid steel balls. The rollers for the progressive suspension shall be the fixed journal ball-bearing and fixed journal plain, stud bearing types. They shall be accurately turned from steel rod, case hardened, shall be not less than 7/8 inch in diameter, and not less than 1/4 inch thick, and both edges shall be chamfered. Alternatively, fixed journal ball bearing rollers may be cold formed from cold rolled steel and case hardened. Cold formed rollers shall be not less than 7/8 inch in diameter and not less than 1/4 inch wide axially, and both edges shall have a radius. Cold formed rollers shall be of the unitary type, consisting of a one piece outer and a one piece inner race, with an unbroken smooth surface in the raceway, and a smooth unbroken rolling surface on the outer race, with the edges of the outer race chamfered, or formed with a radius, or a combination of both. The outer and inner races shall be concentric to within plus or minus 0.0025 inch, and the entire outer rolling surface shall be parallel to the axis of the bearing to within plus or minus 0.0025 inch. Solid steel balls for the progressive suspension shall be not less than 3/8 inch diameter, hardened, and polished. The rollers for the roller channel suspension shall be the ball-bearing type, accurately turned from steel rod, case hardened, shall be not less than 3/4 inch diameter and not less than 1/4 inch wide; alternatively, these rollers may be of the cold formed type described in the above alternate. Nylon tire ball-bearing rollers or plain solid nylon rollers, not less than 1-1/4 inches diameter, and not less than 1/4 inch wide may be substituted for the steel rear rollers in this suspension. Nylon rollers shall not go thru the baking cycle.

3.3.8.7 Drawer stops. All drawers shall be provided with a positive stop which will prevent the drawer from falling out when fully extended, but will permit easy removal of the drawer when desired. The stops encountered by the file drawer and the storage drawers on the inward movement shall be equipped with bumpers of rubber or other durable energy absorbing material.

3.3.9 Pedestal. The pedestal sides and back shall be formed from either one or two pieces. If the sides and back are formed from one piece, the steel shall be not less than 20 gage (0.0359 inch) with the front edges channel shape and provision made for securing the legs at the front and back of the outside section. If the pedestal sides and back are formed from two pieces, the inside and back panel shall be of one piece of not less than 22 gage (0.0299 inch) steel with the front edge channeled, forming part of the front section, and with the back flanged for securing the back leg. The end panel or outside section shall be not less than 20 gage (0.0359 inch) steel with provision made for securing the legs. The top of all pedestal sides and back sections shall be flanged with provision made for securing the pedestal to the desk top, as specified in 3.3.5. The bottom edge of all pedestal sides and backs shall be flanged for the bottom. All pedestal bottoms shall be not less than 22 gage (0.0299 inch) steel, or, alternatively, 16 gage (0.0598 inch) steel if pedestal bottom is utilized to support the leg. Pedestal bottoms shall be attached by spot welding to the flanges of the pedestal sides or skeleton side section and back. The front of the bottom plate shall be channeled along the front edge forming the bottom part of the front of the pedestal section or the front edge of the bottom may be spot welded to a bottom channel of the front section. The parts forming the pedestal front shall be securely welded together and the exposed joints brazed and ground smooth. When sliding shelf tray is removable for converting the sliding shelf into a convenience tray (see 3.3.17) the sliding shelf support need not be welded to the front of the pedestal. The bottom front of the pedestal shall be reinforced by a "U" shape bracket of not less than 16 gage (0.0598 inch) steel that extends across the entire width of the pedestal and up into the front vertical reinforcements not less than 3-1/2 inches, except in the typewriter pedestals, in which the brackets may extend not less than 2-3/4 inches up into the front vertical reinforcements when necessary to prevent interference with the application or operation of the hinge. This bracket shall be channel shape in cross-section, or, alternatively, may be another shape with at least two bends. When the bracket corners are notched prior to forming, they shall be reinforced by fusion welding or with corner gussets of the same gage steel as the bracket, otherwise, they shall be reinforced with integral gusset type embossings. The bracket shall fit snugly against the bottom plate and shall be welded to front vertical reinforcements. Alternatively, in lieu of the U-shape bracket, the bottom front of the pedestal shall be reinforced with a Z shape member of not less than 16 gage (0.0598 inch) steel which extends the full inside width of the pedestal. One leg of this reinforcement shall have an offset formation from which a flange shall extend the full depth under the return flange on the pedestal bottom face formation. The assembled height of this member shall be no lower than the top

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

of the above referenced return flange and the assembled depth shall be such that the rear vertical surfaces of this member and the front vertical reinforcements are on the same plane. This reinforcement shall be securely spot welded to the pedestal bottom. The front vertical reinforcements shall rest on this horizontal bottom reinforcement and shall be continuously brazed (see 3.3.4.1) thereto. This continuously brazed area shall extend from the bottom of the joint on the face of the pedestal between the pedestal side and bottom, (including the joint between the return flanges of these parts), across the joints between the front vertical and the horizontal bottom reinforcements and down along the joint at the rear of and between the end of the horizontal bottom reinforcement and the pedestal side. Each pedestal side or side section shall be reinforced by not less three "Z" shaped braces of not less than 20 gage, (0.0359 inch) steel. The "Z" shaped braces shall be approximately the full height of the pedestal and spaced between the front and back of the pedestal and spot welded to the side panels on not more than 6 inches, center-to-center. The lower edge and inside corner of the front pedestals and the lower edge of the knee-space panels shall be rounded full length not less than 1/4 inch radius to minimize possible injury to the user. Knockouts, may be provided for concealed wiring either to the front or rear of the pedestal. Knockouts, if furnished, shall accommodate insulating grommets having a clear hole size not greater than 5/8 inch diameter.

3.3.10 Legs. The legs shall be formed from not less than 18 gage (0.0478 inch), steel, 2 inches square, (plus or minus 1/8 inch) with not less than 1/4 inch radius on the extreme outside corner of each leg. Provisions for rigid attachment to the panels and pedestals shall be as specified in 3.3.5. When legs are not tubular their entire length, a 16 gage (0.0598 inch) steel angular or curved reinforcing member not less than 10 inches long, and extending not less than 5 inches above and below the lower edge of pedestal, shall be welded to the inside of each leg. Desk legs shall be square with the pedestal when secured thereto.

3.3.11 End panels for class 2 desks. The end panel shall be constructed of two basic pieces; the outside panel and the inner panel. The outside panel shall be of not less than 20 gage (0.0359 inch), steel and the inner panel shall be of not less than 22 gage, (0.0299 inch), steel. There shall be at least one 90 degree flange formation along the perimeter of the bottom of the end panel. The bottom side edges of the end panel shall be additionally formed into a return flange formation. The top side edges of the end panel shall have at least one 90 degree flange. The inner and outer panels shall be securely interlocked, welded, brazed, (or a combination thereof), together. Alternatively, the end panel may be of a basic one-piece construction of not less than 20 gage (0.0359 inch), steel and the vertical ends shall be securely interlocked, welded, brazed, (or a combination thereof), together. All the above formation requirements for the two-piece construction apply to the one-piece construction. In either type of construction, all vertical edges of the end panel that are exposed after the legs are applied shall have the same radius as the vertical edges of the pedestals. Also in either type of construction, the interior of the end panel shall be sufficiently reinforced to prevent "oil canning" of both outside and inner panels and to assure that it will hold its strength and shape through the abuse of shipping and moving. All vertical seams shall be on the knee-space side of the end panel. Provision shall be made at the top of the end panel for attachment to the desk as specified in 3.3.5.

3.3.12 Rear knee-space panel. The rear knee-space panel for all desks shall be formed from not less than 20 gage (0.0359 inch), steel with flanges on the top and sides and channel formed, or formed into a round bead, or open bead channel on the bottom. The rear knee-space panel shall be secured to pedestal through the pedestal sides or bottom and top. The rear knee-space panel shall be the full height of the pedestal and shall be mounted flush but within the tangent line of the bottom and back radii.

3.3.13 Knee-space brace for type I and type II, class 2 desks. The knee-brace shall be of not less than 18 gage (0.0478 inch) cold-rolled steel formed channel shape on front and rear edges. The ends shall be formed, punched, and attached to the underside of the end panel and pedestal. The width shall be not less than 5 inches and the height not less than 3/4 inch. The brace shall provide ample support to prevent sway on end panels or pedestal shall be conveniently located and free from injurious surfaces.

3.3.14 Sliding Shelf. The sliding shelf for drawer pedestal of all class 1 desks and for type I, class 2 desks, shall be not less than 18 gage (0.0478 inch) steel formed channel shape on both sides and formed with a 90 degree flange plus a flat fold or with a return flange formation along the front. Alternatively, the sliding shelf may be formed of not less than 20 gage (0.0359 inch) steel formed channel shape along the sides, with the front edge folded over forming a double thickness across the front and the sides reinforced with not less than 16 gage (0.0598 inch) channels inset and spot welded to the side channels of the top plate of the sliding shelf. The sliding shelf shall operate on 16 gage (0.0598 inch) steel runners formed channel and "Z" shape which will permit the shelf to extend horizontally not less than 14-3/4 inches from the front of the top of the desk. Alternatively, the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

shelf may operate on 18 gage (0.0478 inch) steel runners when the steel runners formed channel and Z-shape shall be part of a one-piece formed assembly consisting of the desk front and rear horizontal tie members, the two steel runners, and the necessary reinforcing gussets and stops. Also, alternatively, the sliding shelf may operate on 16 gage (0.0598 inch) steel runners formed channel shape, provided the bottom leg of the channel is stiffened with a rib or other similar formation extending the full length of the runner, and provided the runner is welded to the pedestal at three places, (front, near center, and rear). Rubber or felt bumpers, or coil or leaf springs, shall be provided as a noise-reducing stop when shelf is fully extended or pushed into the pedestal. The two front corners of the sliding shelf be brazed and ground smooth. An area not less than 10 inches by 14 inches on the underside of the sliding shelf shall be covered with a felt composition sound-dampening material not less than .080 inch thick, permanently adhered to the area with a suitable adhesive. Alternatively, an equivalent sound-dampening material on pressure sensitive tape is permissible.

3.3.15 Typewriter compartment for type II, class 1 desks. The typewriter pedestal shall be on either the right or left hand (facing) as specified. The pedestals shall have a hinged door with three pulls in alignment with the pulls on the opposite pedestal or one pull centrally located at the side or top of the door. There shall be two hinges per door. The hinge leaves or wings shall be flush with, or inset the surface of the door and that part of the side of the pedestal framing the door. The hinges shall be of not less than 0.062 inch thick steel. Alternatively, a pivot-pin type hinge is acceptable provided the pin is a solid steel rod not less than 0.156 inch in diameter which extends from the inside bottom of the pedestal to the top of the pedestal. The application of the desk top to the desk shall hold the rod in position. There shall be a nylon bushing in both the top and bottom of the door. Both methods of hinging the door shall support the door square in the pedestal opening, and shall prevent vertical or horizontal movement of the door. The door shall be double-wall construction. The outside door shall be not less than 18 gage (0.0478 inch), steel formed channel shape on all edges. The inside door shall be not less than 20 gage (0.0359 inch), steel flanged on all edges. Alternatively, the outside door panel may be 20 gage (0.0359 inch) steel and the inside door panel may be of 22 gage (0.0299 inch) steel provided they are reinforced by not less than two bar reinforcements between the panels or provided the space between the panels is filled with sound-dampening material. This alternate door construction may be mechanically assembled by forming provided there is no movement between the inner and outer doors after assembly, and provided the wrap-around outer door flanges are flush with or slightly inset the outside surface of the inner door. Except for the alternate method described above, assembly of inner and outer door panels shall be accomplished by fusion welding, projection welding, brazing in accordance with 3.3.4.1, or MIG (mechanical-insert gas) welding. If projection welding is used, there shall be not less than 4 projection welds on each side, top, and bottom. The top and bottom corners (opposite the hinged side) of all doors shall be fusion welded or brazed and ground smooth. Unless otherwise specified herein, these shall be not less than two areas of weld or braze between each corner of the doors. When braze is used between each corner, each brazed area shall be not less than 1/2 inch long, and shall completely hide the seam between the inner and outer door at the brazed area. All welded and brazed areas shall be free of spatter and roughness. The outside surface of the inner door shall be flush with or extend not more than 3/32 inch beyond the outside surfaces of the outer door return flanges. The typewriter bed shall be constructed of not less than 16 gage (0.0598 inch) steel and shall be designed to withstand the test specified in 4.4.1. It shall extend not less than 19 inches from the front of the desk top when in the raised position. All exposed corners of the bed shall be brazed and ground smooth. The mechanism shall be as specified in 3.2.5 and the pedestal shall provide for mounting of the mechanism. Doors shall be provided with a stop in the closed and open positions. In addition, the extended platform shall engage the door for additional support.

3.3.16 Fixed typewriter bed. The fixed typewriter bed on type II, class 2 desks shall be not less than 18 gage (0.0478 inch) steel with front-edge channel and box formed to prevent raw edges. The side and back edges shall be flanged upward for attaching to the top plate. The underside of the fixed bed shall be reinforced to withstand top test specified in 4.4.2. Platform shall be not less than 20 inches wide by 20 inches deep and 26 inches from the floor.

3.3.17 Convenience trays for Type II, Class 2 desks. A convenience tray to take the place of the sliding shelf and shelf tray specified in 3.3.9 shall be supplied on type II, class 2 desks and provision may be made in all desks for using the convenience tray. The convenience tray shall be formed from not less than 24 gage (0.0239 inch) steel. There shall be three equally divided compartments across the front for office supplies such as paper clips, pens and rubber bands and one narrow compartment running along one side for pencils and rulers. The remainder of the tray shall form a compartment for stationery or carbon paper.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

3.4 Pretreatment and finishing.

3.4.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces, shall be treated for painting in accordance with any method of Federal Specification TT-C-490.

3.4.2 Priming. Unless otherwise specified herein, all exterior and interior surfaces (except the top of the top plate) treated as specified in 3.4.1 shall be coated with primer specified in 3.2.6.1.

3.4.3 Enameling. All primed surfaces of the desk shall be coated with enamel as specified in 3.2.6.2 and 3.2.6.1 and shall be baked at a time-temperature cycle recommended by the enamel manufacturer. Total dry film thickness of enamel and primer shall be not less than 1.4 mils. on all "wear areas" (outside edges of top, outside surfaces of legs, all drawer fronts, typewriter pedestals door, and front edge or face of sliding shelves), and not less than 1.0 mils. on other surfaces, inside and outside of the desk. Primer may be omitted from any surface prepared for painting in accordance with type I or type II of Federal Specification TT-C-490 provided the dry enamel film thickness is not less than 1.1 mils. on all "wear areas", and not less than 1.0 mils, on all other surfaces, inside and outside the desk. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film or no film, and separation of color. Finish panels shall withstand the test specified in 4.4.3.

3.4.4 Bolts, nuts, screws and accessories. The bolts, nuts, screws, and where specified, other accessories shall be made to resist rust by zinc, chromium or cadmium plating.

3.5 Identification marking. Unless otherwise specifed, each desk shall be permanently marked on the knee-space side of the back panel, starting 8 inches from the top in a plain and legible manner with the specification number, the Federal stock number, the month and year of manufacture, the contractor's name or trade-mark, and the contract order number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with Military Standard MIL-STD-130.

3.6 Workmanship. A high degree of craftsmanship shall be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges; to assure that the occurrence of defects will not exceed the acceptable quality level specified herein; and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in Military Standard MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

4.2.2 End item inspection.

4.2.2.1 Visual examination. Examination of the Desks shall be in accordance with the classification of defects specified in Table I and acceptable quality levels (AQL's) specified in 4.2.2.3. The lot size shall be expressed in units of desks for the purpose of determining the sample size in accordance with Military Standard MIL-STD-105. The sample unit for this examination shall be one complete desk.

TABLE I. Classificiation of defects

Examine	Defect	Classification Major	Classification Minor
Enamel finish	Poor adhesion, i.e., blistered, checking or peeling.		
	Tacky (not dry to touch). Less than thickness specified. Color separation, stain, or not smooth and uniform.		X
	Runs, sags, or foreign matter in coating on any exterior surface.		
	Abrasion or area of thin coating.		
	Wrong color.		X
	Scratch through to base metal, or bare spots.	X	
	Rust under coating.		
Metallic Coating	Wrong type.		X
	Poor adhesion, i.e., blistered, peeling, flaky, stained or discolored.	X	
Workmanship and Construction (General)	Any part missing, except bolts, nuts and lockwashers.		
	Malformed parts affecting serviceability.	X	
	Broken, punctured, or cracked parts.		
	Sharp edge or projection that may cause injury.		
	Holes for self-tapping screws not extruded or wrong diameter.		X
	Bolt hole in wrong location or larger than specified.		
	Malformed, damaged, buckles, or warped parts affecting appearance.		X
	Any dent on exposed surfaces affecting appearance.		
	Componet not of specified material.	X	

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification Major	Classification Minor
Bolts, nuts, lockwashers	Not metal plated.	X	
	Threads stripped on more than one bolt.	X	
	More than one bolt, nut or lockwasher missing.	X	
	Threads stripped on one bolt.		X
	One bolt, nut or lockwasher missing.		X
Welds	Welding and brazing not as specified.	X	
	Burnt through, cracked, fractured or not fused.	X	
	More than one spot weld missing at any one joint.	X	
Locks	Wrong type.	X	
	Missing (when specified).	X	
	One key will operate more than one lock in groups of less than 200 desks.		X
Foot sockets	Not as specified (see 3.2.4.2).	X	
Steel	Not stretcher level standard of flatness for parts specified.		X
	Not gage specified.	X	
	Rust, scale, pits.	X	
Drawer pull	Not as specified in 3.2.4.4.	X	
	Rough or sharp edges.	X	
	Not properly secured to desks.		X
Binding strip	Not as specified in 3.2.4.5.	X	
Desk top	Material not as specified.	X	
	Top covering not properly ahdered to top plate.	X	
	Top plate buckled, bulged or warped.	X	
	Top plate does not grip binding strip.	X	
	Edge molding has sharp edges.	X	
	Corners rounded on less than 3/4 radius.		X
	Binding strip loose or does not closely fit top material.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification Major	Classification Minor
Drawers	Inside dimensions less than specified.	X	
	Not constructed as specified.		
	Drawer extension less than specified.		
	Drawer front does not fit square in opening affecting appearance.		X
	Storage drawers not equipped with 2 crosswise partitions on 1 inch centers.		
Drawer suspension and stops	Not of type specified.	X	
	Suspension not properly secured to drawer side of pedestal.		
	Not constructed as specified.		
	Stop lets drawer bypass on inward or outward movement.		
	Drawer fronts touch when 2 or more drawers are open at the same time.		X
	Does not contact rubber bumpers.		
Stationery tray	Stationery tray not furnished or not as specified (type II desk).		X
Pedestal	Gage and grade of steel used, and construction not as specified.	X	
Legs	Not properly secured to pedestal.		X
	No reinforcement in slip-on-type legs.		
	Spring clips or brackets for securing slip-on-type leg not continuous full height of pedestal.		
	Not square with pedestal when secured in plate, affecting appearance.		
End panel (Class 2 desks)	Gage and grade of steel used and construction not as specified.	X	
Rear knee space panel	Not full height of pedestal.		X
	Does not fit tight against pedestal sides.		
	Bottom of panel not properly formed, affecting appearance.		
Knee-space brace (class 2)	Not size and shape specified.		X
	Not attached to pedestal and end panel as specified.		
Sliding shelf	No sound dampening material on underside.		X
	Not provided with noise reducing stop.		
	Has sharp or unprotected edges affecting safety.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification Major	Classification Minor
Typewriter compartment	Door not double-wall.		
	Corners of door not ground smooth.		X
	No provision made for holding door in open or closed position.		
	Typewriter mechanism not securely mounted.	X	
	Weld or braze on typewriter door cracked or broken.		

4.2.2.2 Dimensional examination. Inspection will be made of desks for compliance with dimensions specified including thickness of metal and film thickness of prime coat and enamel, and enamel where primer coat has been omitted. Any dimension not within tolerance specified shall be classified as a defect.

4.2.2.3 Inspection levels and AQL's. The acceptable quality levels (AQL's) expressed in defects per hundred units, and inspection levels shall be as follows:

	Inspection levels	AQL's
For examination in Table I Major	II	4.0
For examination in Table I Total	II	10.0
For examination in 4.2.2.2 (1 class)		4.0

4.3 Examination of preparation for delivery. An examination will be made to determine that packaging, packing and marking, as required by Section 5 of this specification, are complied with. Defects will be scored in accordance with Table II below. The sample unit shall be one shipping container. The lot size shall be the number of containers in the inspection lot.

TABLE II. Classification of defects

Examine	Defects
Marking	Incorrect, illegible, of improper size, location, sequence, or method of application.
Material	Any noncomforming components, component missing, damaged or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete, closure of shroud, inadequate securing of keys, drawers and doors of contents and padding of perimeter edges.

4.4 Tests.

4.4.1 Typewriter mechanism and platform test. After satisfactory preliminary inspection has been accomplished, the test shall be performed with the back edge of the desk secured to avoid tipping and with the platform in the raised or operating position but without any surport to the platform by the compartment door. A load of 120 pounds shall be applied to an area of not more than one square foot in the center of the platform starting four inches from the outer end. The load shall be allowed to remain in place for a period of one hour. Accurate measurements of the distance between the floor and the bottom of the front of the typewriter platform shall be taken before the load is applied, immediately afterwards and at the end of the testing period. The deflection of the platform shall not exceed 1/4 inch at any time during the test, and after the load is removed shall have taken a permanent set of more than 1/8 inch. Any loosening of parts or any deflection which exceeds the above maximum allowance will be considered as failing to meet the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

4.4.2 Top test. A weight of not less than 600 pounds shall be applied to an area not to exceed 12 inches in diameter for at least 5 minutes. The test area shall be at the front center of the knee-space. The desk top or fixed platform shall not deflect more than 1/8 inch and shall not take on any permanent set. See 4.4.11 for Level Test to be performed in conjunction with this test.

4.4.3 Finish test for steel panels. A 20 gage steel panel prepared in accordance with 3.4 shall be bent at room temperature around a 1/8 inch diameter rod at 180 degrees without cracking, flaking or loss of adhesion of the enamel.

4.4.4 Spot welds. Spot welds shall meet the peel test specified in Military Specification MIL-W-12332A(MR) and button diameter shall conform to Table II as specified therein.

4.4.5 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend at room temperature with and across with grain without showing any crystallization, cracks or fractures on the outside of the bend.

4.4.6 Service test. The desk or desk pedestal of the desk being tested shall be bolted or otherwise secured in proper position. The file drawer shall be connected by the drawer pull to a machine which will operate the drawer. The machine shall have a positive means (no springs) for adjusting the length of its stroke so that the drawer will travel the full distance (not more than 1/2 inch clearance at each end of stroke) from back stop to front stop. The machine shall drive the drawer at a rate of 20 cycles per minute (plus or minus 2 cycles per minute). The mechanism shall in no way contribute to the support of the drawer. The drawer shall be loaded with papers, guide cards and folders, or their equivalent weight, which shall be equally distributed from front to back of drawer and shall total 50 pounds. The suspensions of the drawer being tested shall be cleaned and lubricated with SAE 30 machine oil at the end of 10,000 cycles and shall have no further attention until the test is completed. At the beginning of the test and at each increment of 10,000 cycles, a drawer pull test as specified in 4.4.7 shall be conducted. The drawer suspension shall be considered as having failed the service test if the drawer fails to pass any of the required pull tests performed at or before the completion of 50,000 cycles. Should suspension failure be perceptible during the increments of 10,000 cycles, the machine shall be stopped and the drawer pull test specified in 4.4.7 shall be conducted at that point.

4.4.7 Drawer pull test. The drawer to be tested shall be loaded with typical filing material such as papers, guide cards and folders or their equivalent weight equally distributed from front to back of drawer in the following amounts:

File drawer - 50 pounds
Storage drawer - 20 pounds

The test shall be conducted by passing a limp cord, attached to the center of the drawer pull, over a sheave with a weight applied to the free end. The force required to start the loaded drawer forward and to move it to its full outward limit shall be recorded. The drawer operating force for the file drawer shall not exceed 3-3/4 pounds, except, when the drawer suspension assembly incorporates a feature which drops the drawer into place to facilitate closing of the drawer. The drawer operating force shall then not exceed 6 pounds to bring the suspension out of the depression. At that point the drawer will be stopped and the operating force required to continue the drawer to full extension shall not exceed 3 pounds. The drawer operating force for the storage drawer shall not exceed 4-1/2 pounds to start operating and shall not exceed 4 pounds to continue drawer to full extension.

4.4.8 Drawer interference test. With the drawers loaded with the weights specified in 4.4.7, the drawer fronts shall not touch each other at any point of extension, up to and including full extension when adjoining drawers are opened and closed at the same time.

4.4.9 Follower-block (compressor test). The file drawer to be tested shall be loaded with filing material consisting of paper, guide cards and folders with a total weight of 30 pounds. The filing material shall be held against the front of the drawer by the follower block. The location of the follower block shall then be marked by a mark scratched on the bottom of the drawer. The apparatus specified in 4.4.6 for operating the drawer shall be connected to the drawer being tested and set in motion and made to operate 500 cycles. Upon completion of the 500 cycles the position of the follower block shall be indicated by a second mark scratched on the bottom of the drawer. The rearward movement of the follower block, as indicated by the distance between the two scratch marks, as a result of this test shall not exceed 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.4.10 Plastic laminate delamination test. Two test specimens, 4 inches by 24 inches, shall be cut from each of the sample panels prepared in 3.3.6.1. The test specimens shall be completely immersed in boiling distilled water for one hour, then removed and immersed in distilled water at 23 degrees, plus or minus 1.1 degrees Centigrade (C) (73.5 degrees, plus or minus 2 degrees Fahrenheit (F) for 30 minutes. The test specimens shall then be dried at 60 degrees, plus or minus 3 degrees C (140 degrees plus or minus 5 degrees F) in a circulating air oven for 20 hours. The specimen shall be removed from the oven, allowed to cool for 2 hours and then shall be bent over a 16 inch diameter mandrel in 3 to 6 seconds until the entire specimen is in contact with the surface of the mandrel. The specimen shall be examined for evidence of delamination, cracking and blistering.

4.4.11 Level test for top. Place a steel straight-edge on edge diagonally, (corner-to-corner), across the top. The length of the straight-edge shall be greater than the diagonal length of the top. There shall be no gap between the straight-edge and top greater than 1/16 inch at any point along the diagonal length of the top. This test shall be performed along both diagonals of the top before and after performing the top test specified in 4.4.2.

5. PREPARATION FOR DELIVERY shall be in accordance with Interim Federal Specification PPP-P-00225, Desk, General Office, Steel, Packaging and Packing of.

6. NOTES

6.1 Intended use. The Type I, class 1 desk is intended for use in general office areas where maximum desk top area and drawer space are required for clerical duties. The type II, class 1 desk is intended for use in general office areas where maximum desk top area and drawer space is required by the typist or secretary. The Type I, class 2 and Type II, class 2 desks are intended for use in general office areas where the duties of the clerk or secretary do not require a double pedestal desk and where floor space is a determining factor.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.


(a) Size and class of desk required (see 1.2.1).
(b) Color of finish if other than gray (see 3.2.6.2.1).
(c) If special marking is required (see 3.5).
(d) If preproduction sample is not required (see 3.1).
(e) Whether packaging and packing level A, B, or C, is required.
(f) If plastic tops are required (see 3.2.3 and 3.3.5).
(g) When locks are required (see 3.2.4.3).

6.3 Plastic laminate top. A pinch roller pressure of 50 pounds per square inch has been found to give a satisfactory bond for the adhesive.

6.4 Color, pattern, and finish of laminated plastic. The following products are known to comply with the required laminated plastic color, pattern, and finish as exemplified by the GSA standard sample:

1. Enjay Fiber and Laminates Co.——Nevamar, product no LH-7-1 white leater, LSO finish.
2. Formica Corporation——Product No. 77-249-33
3. General Electric Corporation——Textolite, product no. S-759, unbrushed textured.
4. Pioneer Plastics Corporation——Pionite, No. 8-LEA-2 white leathertone, matte finish.
5. Westinghouse Corporation——Micarta, No. 81-M-60 white cowhide, oil rub finish.
6. Reiss Associates, Inc.——Railite, No. NW-861-O, oil texture finish.
7. Den-Gre Plastics Co., Inc.——Lamilite, product no. 525, white leather, matte finish.
8. Ralph Wilson Plastic Co.——Wilson Art, product no. 2970, velvet finish.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

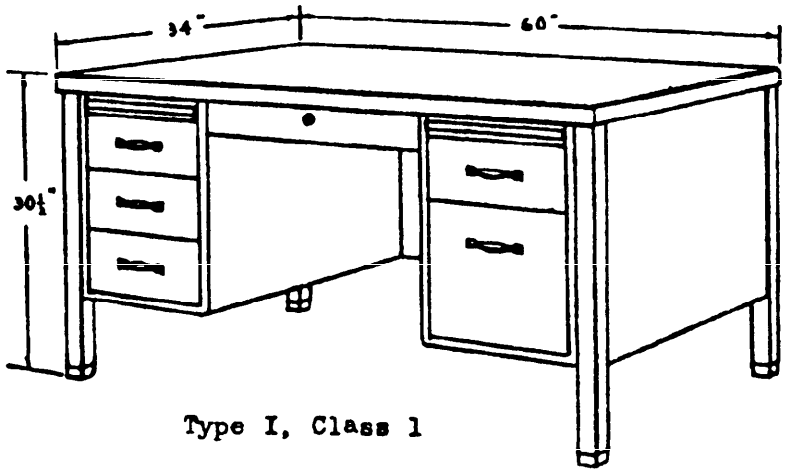

Type I, Class 1

Desk contains:

4 Storage drawers min. inside clear 12" W x 5-1/2" H x 24" D
1 Letter drawer min. inside clear 12-1/8" W x 10-1/8" H x 22-3/4" D
1 Center drawer min. inside clear 22" W x 1-1/2" H x 18" D

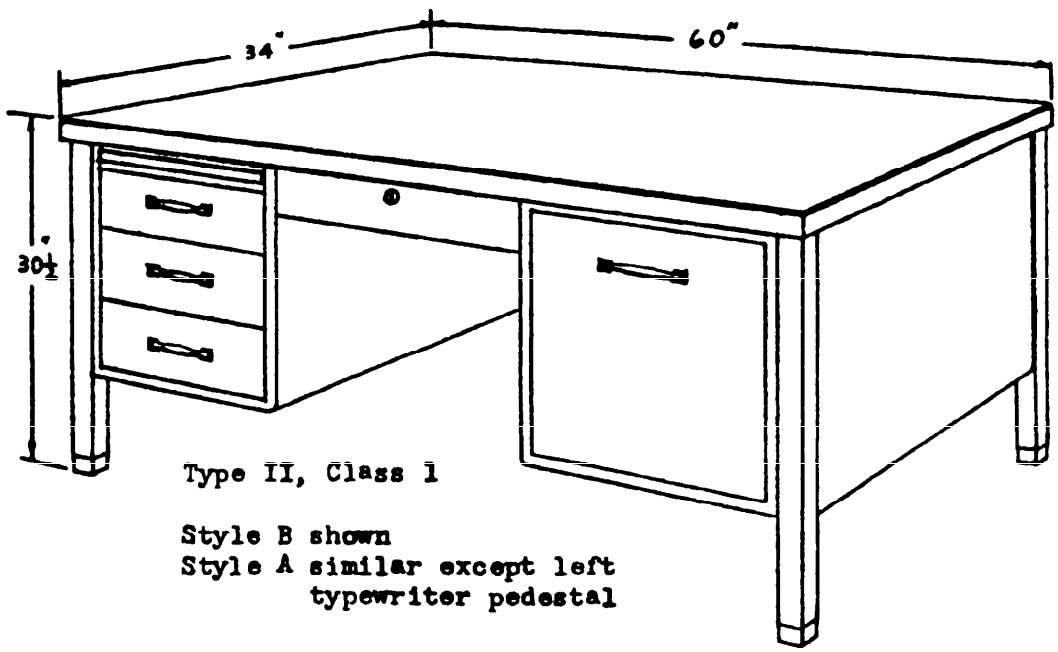

Type II, Class 1

Style B shown
Style A similar except left typewriter pedestal

Desk contains:


3 Storage drawers min. inside clear 12" W x 5-1/2" H x 24" D
1 Center drawer min. inside clear 17" W x 1-1/2" H x 18" D
1 Typewriter compartment door 18" W x 18-1/2" H

FIGURE 1. Double pedestal desks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Desk contains:


1 Storage drawer min. inside clear 12" W x 5-1/2" H x 24" D
1 Letter drawer min. inside clear 12-1/8" W x 10-1/8" H x 22-3/4" D
1 Center drawer min. inside clear 22" W x 1-1/2" H x 18" D

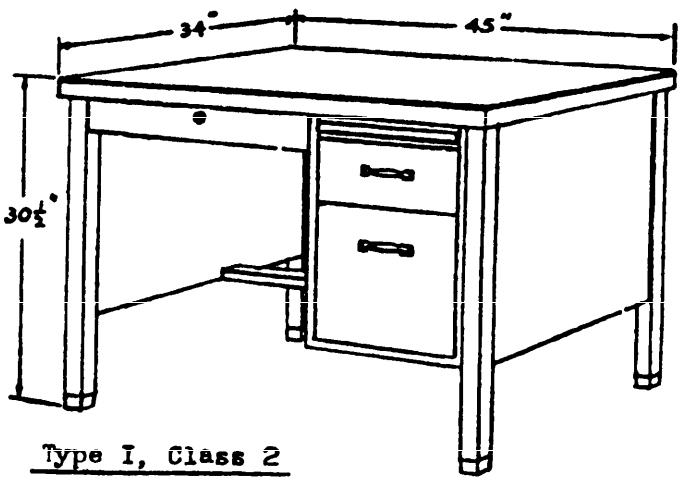

Type I, Class 2

Desk contains:

3 Storage drawers min. inside clear 12" W x 5-1/2" H x 24" D

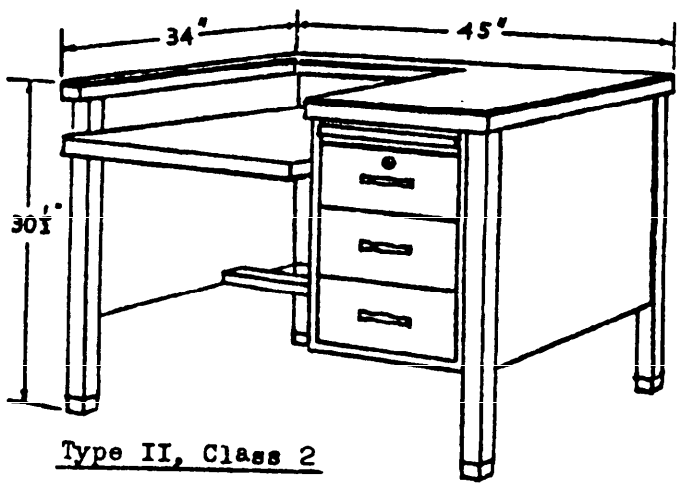

Type II, Class 2

FIGURE 2. Single pedestal desks.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

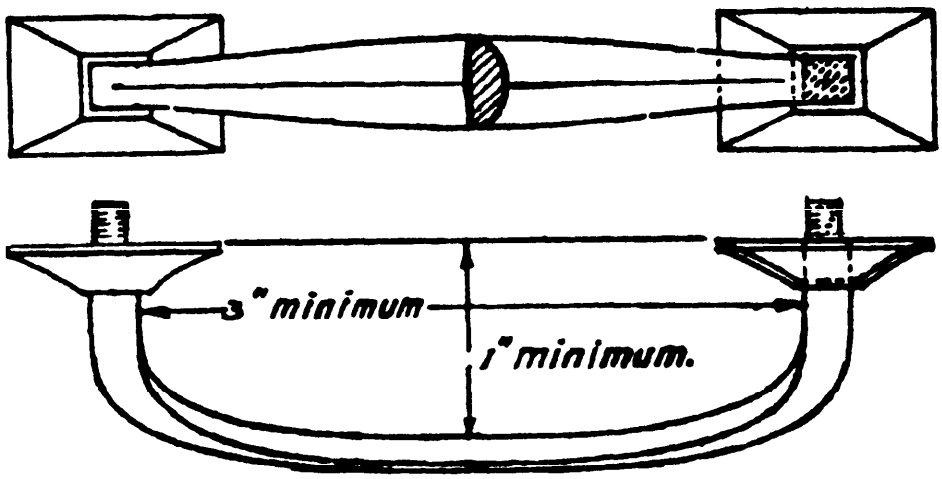


FIGURE 3. Drawer pull.

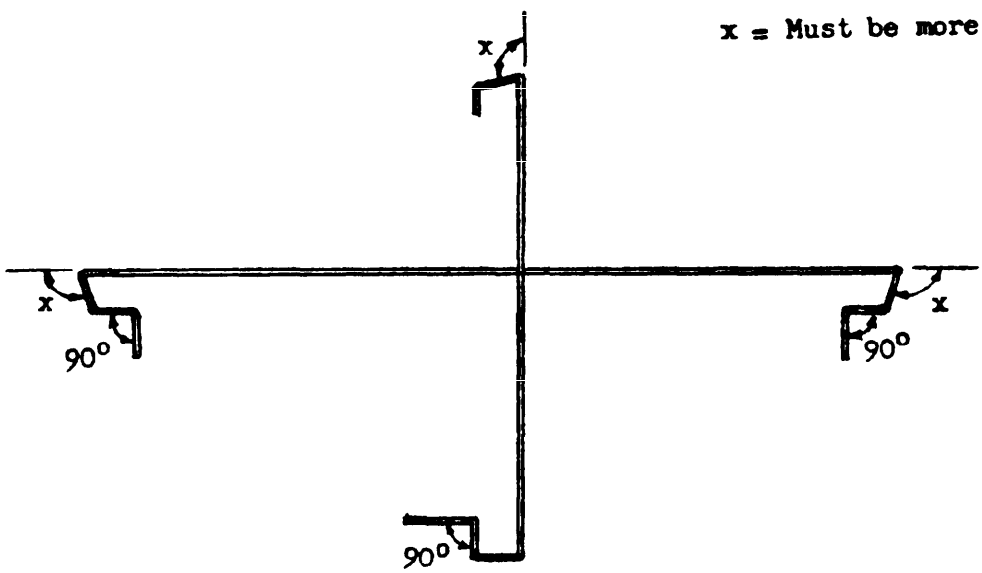


FIGURE 4. Outside drawer front formation
Horizontal and vertical sections.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

GENERAL SERVICES ADMINISTRATION - FEDERAL SUPPLY SERVICE

SPECIFICATION COMMENT SHEET

BUDGET BUREAU NO. 29-R0175

INSTRUCTIONS

This form provides a way for users of this specification to inform the originator of problems encountered in its use. It is not to be used to request changes to accommodate proprietary features. All comments will be considered and appreciated, but please do not expect a reply. To comment: detach, complete, and mail to: General Services Administration, FSS (FMSF), Washington, D. C. 20406

NOTE: Comments on this form do not constitute or imply authorization to waive any part of the document or serve to amend contractual requirements.

1. SPECIFICATION

AA-D-001911(GSA-FSS) Desks, Steel, General Office

2. CONTRACT NO. *(If any)*	3. QUANTITY ON CONTRACT *(Optional)*	4. DOLLAR VALUE *(Optional)*

5. GENERAL NATURE OF PROBLEM *(e.g., inspection difficulties, manufacturers unable to meet tolerances, containers collapse under normal warehousing conditions, etc.)*

6. SPECIFIC REQUIREMENTS AFFECTED *(Include paragraph number and lines of wording)*

7. SPECIFIC PROBLEMS *(e.g. tests in 4.2.2 will not assure that the battery will last required time; temperature ranges in table 2 do not conform to commercially available items.)*

8. RECOMMENDATIONS

9. NAME OF MANUFACTURER, ASSOCIATION, GOVT., AGENCY, ETC.	10. ADDRESS *(Number, Street, City, State and Zip Code)*

11. NAME AND TITLE OF SUBMITTER	12. DATE

FORM GSA FEB 69 2200

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.