AA-O-240
FEBRUARY 2, 1961
SUPERSEDING
Int. Fed. Spec. AA–F–00795a(GSA–FSS)
February 6, 1959

FEDERAL SPECIFICATION

OFFICE FURNITURE, STEEL, UNITIZED

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope.—The steel furniture items covered by this specification are designed for use in specific applications when it is considered necessary or advantageous to (a) conserve floor space, (b) gain additional desk top working space in the same amount of floor space, (c) increase efficiency by providing "work stations" incorporating the type and quantity of filing drawers, book shelves, or working top area which can be arranged to meet the requirements of a specific job. The furniture is designed to supplement but not entirely replace standard office furniture and is intended to be used instead of proprietary intermembering type modular furniture. (See paragraph 6.2 for intended use of this furniture.)

1.2 Classification.

1.2.1 *Types.*—Unitized office furniture shall be of the following types, as specified:

Type I.—Desk, Flat Top, L–Unit, Single Right Pedestal, adjustable in height from 29 inches to 30½ inches.
- Size 1.—40 inches wide, 30 inches deep.
- Size 2.—50 inches wide, 30 inches deep.

Type II.—Desk, Flat Top, L–Unit, Single Left Pedestal, adjustable in height from 29 inches to 30½ inches.
- Size 1.—40 inches wide, 30 inches deep.
- Size 2.—50 inches wide, 30 inches deep.

Type III.—Table, Clerical, L–Unit, Auxiliary, 66 inches wide, 18 inches deep, adjustable in height from 29 inches to 30½ inches.
- Style a.—Without back panel.
- Style b.—With back panel.

Type IV. — Table, Secretarial, L–Unit, Auxiliary, Typewriter, Two-Level Top, 66 inches wide, 18 inches deep, 27½ and 30½ inches high with a downward adjustment of 1½ inches.
- Style a.—Without stationery compartment.
- Style b.—With stationery compartment in left pedestal.
- Style c.—With stationery compartment in right pedestal.

Type V.—Table, Interview, L–Unit, Auxiliary, 66 inches wide, 24 inches deep, adjustable in height from 29 inches to 30½ inches.

Type VI.—Table, Filing, L–Unit, Auxiliary, with integral filing cabinet in left pedestal, 66 inches wide, 18 inches deep, adjustable in height from 29 inches to 30½ inches.

Type VII.—Table, Filing, L–Unit, Auxiliary, with integral filing cabinet in right

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

pedestal, 66 inches wide, 18 inches deep, adjustable in height from 29 inches to 30½ inches.

Type VIII.—Bookcase, 2 shelves, 22 inches wide, 18 inches deep, adjustable in height from 29 inches to 30½ inches.

Type IX. — Credenza, Office, 66 inches wide, 18 inches deep, 30½ inches high.

Type X.—Top Assembly, Desk, for use over two 2-drawer security filing cabinets, 66 inches wide, 30 inches deep.

Type XI.—Top Assembly, Desk, for use over one 2-drawer security filing cabinet, 50 inches wide, 30 inches deep.

Type XII.—C–Clamp, 2¾ inches nominal size, 2¾-inch-deep throat.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards.—The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification.

Federal Specifications:

L–P–00508 — Plastic Sheet, Laminated, Decorative and Nondecorative.

QQ–S–781—Strapping, Flat, Steel.

UU–P–268 — Paper, Kraft, Untreated, Wrapping.

UU–P–271 — Paper, Wrapping, Waterproofed Kraft.

UU–T–111 — Tape; Paper, Gummed (Sealing and Securing).

LLL–L–354—Linoleum; Desk-Top.

PPP–B–566 — Boxes, Folding, Paperboard.

PPP–B–591—Boxes, Fiberboard, Wood-Cleated.

PPP–B–601—Boxes, Wood, Cleated-Plywood.

PPP–B–621—Boxes, Wood, Nailed and Lock-Corner.

PPP–B–636—Box, Fiberboard.

PPP–B–676 — Boxes, Set-Up, Paperboard.

PPP–C–843—Cushioning Material, Cellulosic.

PP–T–60 — Tape; Pressure-Sensitive Adhesive, Waterproof—For Packaging and Sealing.

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

Fed. Std. No. 595—Color.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Military Specifications:

MIL–A–140 — Adhesive, Water-Resistant, Waterproof Barrier-Material.

MIL–C–490—Cleaning and Preparation of Ferrous and Zinc Coated Surfaces for Organic Protective Coating.

MIL–T–6841—Tape, Adhesive, Rubber and Cork Composition.

Military Standards:

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes.

MIL–STD–129—Marking for Shipment and Storage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

MIL–STD–130—Identification Marking for U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. — The following publications of the issues in effect on date of invitation for bids, form a part of this specification.

Uniform Freight Classification Rules.

(Application for copies may be addressed to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6. Ill.)

Steel Products Manual, Carbon Steel Sheets.

(Application for copies may be addressed to the American Iron and Steel Institute, 350 Fifth Avenue, New York 1, N. Y.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Steel.*—The steel sheets used for all exposed parts shall be cold-rolled, stretcher leveled standard of flatness as defined in table 24 of Steel Products Manual, full pickled and oiled, and free from imperfections. Other sheets shall be hot-rolled, pickled and oiled. The sheet steel for parts to be formed shall withstand the bend test specified in 4.4.2. The gages shown herein are the Manufacturers' Standard Gage for Steel Sheet. The decimal equivalent shown for the steel sheet thickness are subject to the established standard tolerances or ordering limits.

3.1.2 *Linoleum.*— The linoleum shall conform to the requirements of Federal Specification LLL–L–354 except that burlap or felt back may be used. The thickness of linoleum shall be not less than 0.075-inch. The linoleum color shall be as specified in 3.2.2.2.

3.1.3 *Plastic sheet.*—When plastic tops are specified in the invitation for bids, the plastic sheet shall conform to the requirements of Interim Federal Specification L–P–00508 (GSA–FSS), style D, type I, grade HP, class 1, finish A. The plastic sheet shall be 0.062-inch thick with a plus or minus tolerance of 0.005 inch. The plastic sheet color shall be as specified in 3.2.2.3.

3.1.4 *Face hardware.*—The face hardware shall be satin finished anodized aluminum or type 430 corrosion-resistant steel or brushed chromium on steel or on die-cast zinc, brass, or bronze.

3.1.5 *Cleaning.*—All metal surfaces, except exposed hardware, shall be cleaned and surface preparation processed in accordance with any of the grades or types specified in Military Specification MIL–C–490.

3.1.6 *Enamel.*—Enamel for the final coat shall be in accordance with manufacturer's commercial practice, except the color shall be as specified in 3.2.2.1, and the enamel shall be baked for not less than 45 minutes at 300° F., or in accordance with the enamel manufacturer's directions. Enamel shall withstand the test specified in 4.4.3.

3.1.7 *Preproduction sample.*—When specified in the invitation for bids, preproduction samples of the finished commodity, and each component part not visible after assembly, shall be made available at the contractor's plant for inspection and testing by the Government to determine compliance with the requirements of this specification prior to quantity production. The approved preproduction sample shall be used as a quality guide throughout production under the contract.

3.2 Construction.

3.2.1 *Design.*—The design shall be as shown in the attached drawings, as specified in the detailed requirements of this specification, and as exemplified by standard samples adopted by the Federal Supply Service.

3.2.2 *Color.*

3.2.2.1 *Metal finish.*—The color of the metal finish of the furniture units shall be gray,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Color No. 26134, of Federal Standard No. 595. Sample panels of the standard color of the metal finish are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington 25, D. C., or from the Business Service Center of the nearest GSA Regional Office.

3.2.2.2 *Linoleum.*—The linoleum color shall be gray and shall match the standard linoleum color adopted by the Federal Supply Service, General Services Administration. Samples of the standard color of linoleum are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington 25, D. C., or from the Business Service Center of the nearest GSA Regional Office.

3.2.2.3 *Plastic sheet.*—When plastic tops are specified in the invitation for bids, the plastic sheet color shall be green and shall match the standard color adopted by the Federal Supply Service, General Services Administration. Sample panels of the color are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington 25 D. C., or from the Business Service Center of the nearest GSA Regional Office.

3.2.3 *Tolerances.*—Overall width and depth dimensions are subject to a tolerance of plus or minus ⅛ inch except for auxiliary tables, the width of which shall be 66 inches plus or minus $\frac{3}{16}$-inch. All other dimensions, unless otherwise specified herein, are subject to a plus or minus tolerance of ⅛-inch. Dimensions in excess of these tolerances are not permissible due to use with standard partition panels.

3.2.4 *Assembly.*—Assembly holes shall be true and even in joining members. Welding and pits or extortions on the face of the parts shall be filled and ground smooth, and shall not show on the exposed finished parts of the furniture units. The joining of all members shall result in a compact unit of sufficient strength and rigidity to prevent the distortion, breaking or loosening or objectionable vibration of any part of the units during usage with office machines and to withstand rough handling in moving with drawers loaded.

3.2.5 *Locks.*—The center or control drawer of the type I and type II desks shall have a disc tumbler lock operated by a grooved key. The face of the lock shall be of the material specified in 3.1.4, or alternatively, shall be dull nickel finish on die-cast zinc. Each lock on an order up to 200 desks shall be of a different key change in that no one key will open more than one of the 200 locks. Two keys shall be furnished with each lock. The locking mechanism is to be such that in its unlocked position, the center drawer may remain closed without locking pedestal drawers. The lock catches on all pedestal drawers are to be spring controlled in order that any drawer may be pushed in and locked with the locking mechanism in the locked position.

3.2.6 *Drawer pulls.*—The design and dimensions of the drawer pulls shall be as shown in figure 11. The drawer pulls shall be of the materials specified in 3.1.4. All surfaces and edges shall be ground smooth to eliminate roughness and sharp edges. Pulls shall be securely attached with screws or nuts and lockwashers which shall be surface mounted if attached to the inside of the drawer head or countersunk if mounted to the double wall of the drawer front. The finish of all drawer and sliding shelf pulls used on one unit shall match.

3.2.7 *Binding strip.* — The binding strip shall have an upper outside radius of not less than $\frac{1}{32}$-inch or more than $\frac{3}{64}$-inch. Alternatively the binding strip used for the type IX, credenza may have not less than $\frac{3}{16}$-inch quarter round bead. The binding strip material shall be as specified in 3.1.4. The binding strip shall be not less than $\frac{3}{16}$ inch nor more than ¼ inch wide. It shall interlock with the top plate and top frame molding. The binding

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

strip shall not project above the top surface of the linoleum or plastic sheet and shall be made of not more than two pieces joined at the ends with only hair line fitted joints. Four pieces of binding strip are permitted for the type IV secretarial tables with two level tops. The binding strip shall be easily removable.

3.2.8 *Tops.*—The top plate of all furniture units shall be not less than 18 gage (0.478 inch) steel, stretcher leveled standard of flatness, and shall be rigidly reinforced to meet the required test specified in 4.4.1. The top frame molding shall be not less than 20 gage (0.0359 inch) steel, and shall provide for a binding strip as specified in 3.2.7. The top frame molding shall be of one or more pieces and shall be butt joined at the ends. All corners of the top shall be rounded on not less than ¾ inch radius. The overall height of the edge molding and the binding strip shall be not less than 1½ inches.

3.2.8.1 *Linoleum top covering.* — The top plate shall be covered with linoleum as specified in 3.1.2 which shall be cemented uniformly to the top plate by a cement recommended by the linoleum manufacturer. The cement shall be free of lumps or foreign matter.

3.2.8.2 *Plastic top covering.*—When specified in the invitation for bids, the top plate shall be covered with plastic sheet as specified in 3.1.2. The plastic sheet shall be bonded uniformly to the top plate by an adhesive recommended by the adhesive manufacturer for use with metal and shall be applied at a temperature recommended by the adhesive manufacturer to insure even adhesion. The steel top plate shall be properly cleaned and prime painted prior to application of the adhesive. Adhesive shall be applied to both top plate and plastic sheet and dried to remove solvents. After the plastic has been applied to the steel top plate, pressure shall be applied within the range of 5 pounds per square inch minimum and 16 pounds per square inch maximum by a method which will not cause uneven adhesion over the reinforcing members of the top plate.

3.2.9 *Height adjustment.*—The height adjustment mechanism shall permit continuous height adjustment over a range of 1⅛ inches minimum; shall be corrosion resistant; shall approximate the color of the face hardware (see 3.1.4); and shall be entirely operable by hand. The height adjustment mechanism shall consist of a metal tube having a diameter of at least 1½ inches with a ⅜ inch—16 threaded stem. Alternatively, the height adjustment mechanism shall consist of a solid cylinder of general purpose phenolic molded around a ⅜ inch—16 threaded stem. The phenolic cylinder shall be 1½ inches in diameter, plus or minus 1/16 inch. The color of the phenolic shall approximate the color of the face hardware (see 3.1.4). For use with the filing cabinet pedestal of the type VI and type VII auxiliary tables and the type VIII bookcase, a ½-inch diameter steel bolt or a ¾-inch diameter metal tube or phenolic cylinder is acceptable. All footings shall have a smooth bearing surface of at least one square inch. The height adjustment mechanism shall operate with a support constructed of 18 gage (0.0478 inch) steel with a corrosion resistant finish. The height adjustment mechanism and the support shall be constructed and attached in a manner to prevent damage to the furniture in normal use and movement, and shall withstand the test specified in 4.4.4. The type of adjustment mechanism used shall be harmonious with the design of the furniture units as shown on the attached drawings.

3.2.10 *Clamping.* — All desks and tables shall be so constructed as to permit clamping with the C-Clamp shown in figure 12. The clamp is to be attached to the underside of the table edge and the desk edge and shall be inserted and tightened from the desk side as shown in figure 13. The single level tables shall accommodate the clamp at any point along the length of the top, except for the part covered by the end panel or integral filing cabinet. The type IV auxiliary typist tables shall provide for clamping as shown in figure 4. The underside of the table edge shall be so constructed as to require no more than 1½ inches of the clamp opening and the

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

underside of the desk edge shall require no more than ½ inch of the clamp opening. There shall be a minimum of 4 inches clearance for application of clamp from the outer edge of the center drawer to the outer edge of desk top and back to the recessed end panel. Desks and tables shall intermember with standard samples established by the Federal Supply Service.

3.2.11 *Desks, type I and type II.*—The design and dimensions of the desks shall be as shown in figure 1 and figure 2. The desks shall be adjustable in height continuously from 29 inches to 30½ inches. The desks shall have a recessed end panel support similar to the design illustrated which will allow a minimum of 11 inches for user's knees to swing in the "L" arrangement of desk and auxiliary table.

3.2.11.1 *Drawers.*—The number, kind, and minimum inside clear dimensions (usable space) of the drawers required shall be as shown in figure 1 and figure 2. Each letter file drawer shall be equipped with one suitable compressor or file support for front to back filing. When specified in the invitation for bids, each letter file drawer shall also be equipped with one suitable removable legal size compressor for across the drawer filing, together with one vertical drawer partition. Alternatively, a removable legal size cross-tray with compressor or file support may be furnished. The storage drawers are to be of sufficient depth to accommodate trays for 5 by 3 inch, 6 by 4 inch, or 8 by 5 inch cards with clearance for index tabs. A minimum of one partition shall be furnished for each storage drawer. The front of the drawers shall be flush with the front section of the desk. Drawers shall fit into pedestal opening without binding and without a gap.

3.2.11.2 *Drawer fronts.* — The drawer fronts shall have double wall construction. The outside drawer front shall be not less than 20 gage (0.0359 inch) steel. The top and side edges shall be formed in a channel shape which shall be at least 7/16-inch wide. The bottom edge is to be flanged back with three extrudes that bend up into the drawer body assembly, or alternatively, shall be beveled, offset and flanged back and electric welded to the drawer body assembly. The inside drawer front shall be not less than 26 gage (0.0179 inch) steel. The four edges shall be flanged and shall be secured in place by electric welding the side and bottom flanges to the drawer body, or alternatively, flanged on all sides, snugly fit, and held in place by the drawer handle bolts. Alternatively, the inside drawer front shall be flanged at top and bottom and shall have a continuous channel formed across the entire width to provide full rigidity and be a spacer between the inner and outer front.

3.2.11.3 *Storage drawer body.*—The storage drawer body is to be of not less than 24 gage (0.0239-inch) steel. The sides and bottom shall be formed in one piece. The upper edges shall be formed in a bead or channel. To provide for the insertion of adjustable partitions, the sides are to be formed and slotted on one inch centers from front to back. The slots may begin 5¼ inches from inside drawer front. The storage drawer back shall be 22 gage (0.0299 inch) steel. The upper edge shall be folded over and the sides and bottom edges flanged for attachment to the sides and bottom of the drawer body. Alternatively, the storage drawer back may be 19 gage (0.0418-inch) steel. The upper edge shall be ground and sanded and the sides and bottom edges flanged for attachment to the drawer body. The back shall be the same height as the drawer sides, which shall be a minimum of 4 inches.

3.2.11.4 *Letter drawer body.*—The letter drawer body is to be of not less than 24 gage (0.0239 inch) steel. The sides and bottom shall be formed in one piece. The upper edge of the body shall be formed in a bead or channel shape for safety and reinforcement. The letter drawer back shall be of not less than 22 gage (0.0299 inch) steel with the sides and bottom edges flanged for attachment to the sides and bottom of the drawer body and the upper edge folded over. Alternatively, the storage drawer back shall be 19 gage (0.0418

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currenversion before use.

inch) steel. The upper edge shall be ground and sanded and the sides and bottom edges flanged for attachment to the drawer body. The back shall be the same height as the drawer sides, which shall be a minimum of 7 inches. Provision shall be made for the proper operation of a compressor. The compressor shall be controlled by spring tension and shall operate easily within the drawer when released and be held firmly when engaged.

3.2.11.5 *Center drawer.*—The center drawer shall be equipped with a convenience tray which shall extend the full width of the drawer. The tray shall have not less than three compartments not less than 3 inches wide and one pencil compartment. The tray shall be not less than 1 inch high and 3 inches wide. The center drawer shall be equipped with a hood formed from not less than 24 gage (0.0239 inch) steel. The hood shall be not less than 1½ inches wide flanged in on the horizontal ends for spot welding to the drawer sides. The full width of the front edge shall be formed for strength.

3.2.11.6 *Drawer suspensions and stops.*—The drawer suspension shall be constructed without rough or sharp edges and to insure durability and ease of operation and without excessive friction, noise, sagging, wobble or vibration in fully extending the drawer with a minimum test load of 40 pounds evenly distributed in the letter file drawer, 20 pounds in each of the storage drawers, and 10 pounds in the center drawer. Pedestal drawers shall not touch when loaded and equally extended. All storage drawers are to be mounted on smooth operating cold drawn channel suspensions of not less than 16 gage (0.0598 inch) steel. The suspension members are to be formed to eliminate raw edges. The suspension assemblies shall incorporate sufficient nylon bearing surfaces to reduce metal to metal contact in storage drawer operation. The letter size filing drawers shall operate on a zinc, nickel or cadmium plated or black oxide finished progressive suspension with ball or roller bearings. Each drawer shall be equipped with a stop which shall prevent the drawer from falling out when fully extended but will permit easy removal of the drawer when desired. The drawers shall contact rubber bumpers on the closing movement to reduce noise.

3.2.11.7 *Drawer partitions and stationery trays.*—Double wall partitions shall be made of not less than 24 gage (0.0239 inch) steel with a rounded top edge. Single wall partitions shall be made of not less than 18 gage (0.0478 inch) steel. The top edge shall be folded or beaded or ground and sanded. A minimum of one partition shall be furnished for each storage drawer which shall fit securely into the adjustment feature of the drawer sides. When specified in the invitation for bids, sloping stationery compartments shall be included. The stationery compartments shall remain firmly in place and shall be of the interlocking type which interlock with vertical partitions, or alternatively, shall interlock with sides of drawer. Four compartments shall be provided. The compartments shall be not less than ¾ inch apart and shall adequately accommodate 8½- by 11-inch paper. They shall be snugly fitted into any storage drawer to maintain their slope and eliminate vibrations.

3.2.11.8 *Knee-space shelf.*—The knee space shall be braced by means of a shelf. The knee-space shelf shall be not less than 20 gage (0.0359 inch) steel, formed channel shape on the front and rear edges. The ends shall be formed and attached to the side of the pedestal and the end panel. The shelf shall be 9 inches wide, plus or minus ½ inch, and ¾ inch thick. The shelf shall be located even with the bottom edge of the back panel and approximately 1/16 inch from the channel edge of the back panel to prevent vibration.

3.2.11.9 *Sound deadening material.*—The inside of the desk pedestal shall have a non-organic sound deadening material applied to sides and back.

3.2.11.10 *Sliding shelf.*—Each drawer pedestal shall have a sliding pull out shelf of not less than 20 gage (0.0359 inch) steel, suit-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

ably formed and reinforced which shall be located at the top of the pedestal. The shelf shall be provided with suitable stops and bumpers to provide silent and safe operation and shall move on channel suspension. This shelf may incorporate a convenience tray with a sliding plastic or metal cover. The shelf shall extend horizontally not less than 14¾ inches from the front of the desk.

3.2.11.11 *Pedestal construction.*—The pedestal shell sides and back shall be formed of one piece of not less than 22 gage (0.0299 inch) steel with top and bottom edges flanged. The bottom flanges of the pedestal sides and back are to be electric welded to the pedestal bottom. The pedestal bottom shall be of not less than 22 gage (0.0299 inch) steel. There shall be an interior frame or structure consisting of two front and two rear uprights of not less than 18 gage (0.0478 inch) steel and top and bottom horizontal reinforcements on each side of not less than 20 gage (0.0359 inch) steel joining the front and back uprights. The front and back uprights shall be punched and slotted to accommodate drawer suspension members. The pedestal shall be securely electric welded to the interior frame or structure to produce a solid pedestal assembly. The pedestal bottom shall be reinforced by means of box channel supports of not less than 18 gage (0.0478 inch) steel at front and rear for attaching pedestal supports. The pedestal shall have a ¾ inch radius on all corners.

3.2.11.12 *Knee-space back panel.*—The rear knee-space back panel shall be formed of not less than 20 gage (0.0359 inch) steel flanged on the top and side edges. The lower edge is to be rounded and folded or formed into a channel shape for appearance and strength. The back panel is to extend the full height of the pedestal. The back panel shall be located 1¾ inches in from the back of the pedestal.

3.2.11.13 *Desk pedestal leg.*—The legs shall be similar in design and shall be located as shown in figure 1 and figure 2. The leg shall be constructed of 18 gage steel and shall have a corrosion-resisting plating or painted finish. The height adjustment mechanism and support shall be as specified in 3.2.9. The leg or leg support shall be attached to the pedestal by a secure method which will withstand the test specified in 4.4.4. Support columns may have a cover made of nonwoven fiber-glass-mat-filled polyester. The color of the polyester shall match the color of the desk.

3.2.11.13.1 *End panel leg.*—The height adjustment mechanism and support shall be as specified in 3.2.9 and shall be located within ½ inch of the extreme outer edge of the end panel to provide maximum stability.

3.2.11.14 *End panel.*—The recessed end panel shall be constructed of not less than 22 gage (0.0299 inch) steel. The panel thickness shall be at least 2½ inches. End panels shall have a ¾ inch radius on all corners. Particular care should be given to eliminating sharp edges at bottom of panels. The end panel shall be located 1¼ inches, plus or minus 1/16 inch, from the side edge of desk top. The edge of the end panel at the back of the desk shall be even with the pedestal in relation to the desk top.

3.2.11.15 *Desk edge cushioning.*—In order to provide protective cushioning below the projecting binding strips of the desk, two discs shall be applied to the outside surface of the top edge molding on the side which accommodates the clamp. The discs shall be located 3 inches from the front and back edges of the desk top edge molding. The discs shall be made of cork and rubber cushioning material in accordance with Military Specification MIL–T–6841 and shall have pressure sensitive adhesive backing. The disc shall have a minimum diameter of 1¼ inches and shall be ⅛ inch thick.

3.2.12 *L-unit auxiliary tables.*

3.2.12.1 *End (side) panels.*— The end or side panels shall be formed from not less than 22 gage (0.0299 inch) steel. The panel thick-

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

ness shall be at least 2½ inches. The corners shall be formed with a ¾ inch radius. Lock washers shall be used in the attachment of the side panel to the table top. The leg shall be as specified in 3.2.11.13.1.

3.2.12.2 *Back panel.*—The back panel shall be not less than 20 gage (0.0359 inch) steel. The side edges shall be flanged for attachment to the end (side) panels or the table pedestal. The upper edge shall be flanged. The bottom edge shall be formed in a tubular or channel shape. The back panels for the type III, type V, type VI and type VII tables shall be 23½ inches in height. The back panels for the type IV, styles a, b and c, shall be 20½ inches in height. When attached, the bottom edge of the panel shall be 5½ inches from the floor when the height adjustment is at the 29 inch height for the single top tables or 26 inch height for the two level top tables.

3.2.13 *Type III, style a, table, clerical, L-unit.*—The design and dimensions of the table shall be as shown in figure 3. The table shall be sufficiently stable and rigid so that after clamping to the L-unit desk there will be no objectionable vibrations when used with an electric typewriter. The end (side) panels shall be as specified in 3.2.12.1 and shall be located 1¼ inches, plus or minus 1/16 inch from edge of top. The table shall be continuously adjustable in height from 29 inches to 30½ inches.

3.2.13.1 *Type III, style b, table, clerical, L-unit.*—The table shall be constructed in accordance with 3.2.13. The table shall have a back panel as specified in 3.2.12.2 running the full width of the table and located 1¾ inches, plus or minus 1/16 inch, from the outer edge of top.

3.2.14 *Type IV, style a, table, secretarial, L-unit.*—The table shall have a two-level top. The design and dimensions shall be as shown in figure 4. The table shall be sufficiently stable and rigid so that after clamping to the L-unit desk there will be no objectionable vibrations when used with an electric typewriter. The end (side) panels shall be as specified in paragraph 3.2.12.1 and shall be located 1¼ inches, plus or minus 1/16 inch, from edge of top. The table shall be continuously adjustable in height from 29 inches to 30½ inches at one end and 26 inches to 27½ inches at the other end. The metal filler between the two tops shall have a 2½ inch cut-out on each side located 7½ inches from the end of the top as shown in figure 4. Each cut-out shall be provided with a metal cover plate, finished same as filler strip, attached to filler by two sheet metal screws. The cover plate shall be easily removable. The table shall be provided with a back panel as specified in 3.2.12.2 running the full width of the table and located 1¾ inches, plus or minus 1/16 inch, from the outer edge of top. Holes shall be drilled at both outer edges of the side panels so that the back panel can be attached at either side of the table in order to form a right or left hand return when used with a type I or type II desk.

3.2.14.1 *Type IV, style b, table, secretarial, L-unit with stationery compartment in left pedestal and type IV, table, secretarial, L-unit, style c, with stationery compartment in right pedestal.* — The table shall be constructed in accordance with 3.2.14. The design and dimensions shall be as shown in figure 5. The table shall be supported at the lower level end by a cabinet containing shelves. The other end or higher level of the table shall be supported by a panel as specified in 3.2.12.1. The table shall be continuously adjustable in height from 29 inches to 30½ inches at one end and 26 inches to 27½ inches at the other end. The table shall have a back panel as specified in 3.2.12.2 running the width between the stationery compartment on one end and the end (side) panel and located 1¾ inches, plus or minus 1/16 inch, from the outer edge of the top. The panel shall be the full height of the stationery compartment pedestal.

3.2.14.2 *Stationery compartment.*—The design and dimensions shall be as shown in figure 5. The sides and back shall be formed

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

of one piece or three pieces but shall not be less than 22 gage (0.0299 inch) steel with the top and bottom edges flanged. The front and back corners shall have not less than ¾ inch radius. The bottom flanges of the sides and back are to be electric welded to the bottom. The bottom shall be not less than 20 gage (0.0359 inch) steel. The top flanges of the sides and back are to be electric welded to the top front and rear spreader reinforcements. The top front and rear spreader reinforcements shall be of not less than 18 gage (0.0478 inch) steel. There shall be reinforcing uprights at front and rear corners of not less than 18 gage (0.0478 inch) steel. These uprights are to be electric welded to the sides and back. Interior flush linings on each side are to be made of not less than 24 gage (0.0239 inch) steel and to be pierced at least one inch on centers to accommodate adjustable shelves.

3.2.14.3 *Shelves.*—The compartment shall have not less than 5 adjustable shelves. The shelves shall be adjustable to at least 2 inches from top and bottom of cabinet. The shelf shall be constructed of not less than 18 gage (0.0478 inch) steel. The edges shall be folded or beaded or ground and sanded. The outer edge shall have a half-circle cut-out to permit easy removal of papers. The shelf shall fasten into the piercings in the interior flush lining so as to permit easy adjustability and shall remain firmly in place. When in place, the front edge of the shelf shall be approximately ½ inch from front of compartment.

3.2.14.4 *Leg.*—The leg shall be similar in design and position to figure 5 and shall be in accordance with 3.2.11.13. The leg shall be attached by a secure method which will permit sliding or upending of the table.

3.2.15 *Type V, table, interview, L-unit.*—The design and dimensions of the table shall be as shown in figure 6. The table shall be sufficiently stable and rigid so that after clamping to the L-unit desk, there will be no objectionable vibrations when used with an electric typewriter. The end (side) panels shall be as specified in 3.2.12.1 and shall be located 1¼ inches, plus or minus 1/16 inch, from edge of top. The table shall be continuously adjustable in height from 29 inches to 30½ inches. The table shall have a center panel running the full width of the table located 7½ inches from one outer edge of the end panel and 15½ inches from the other outer edge of end panel. Extra holes shall be drilled so that if desired the center panel may be located 11½ inches from the outer edges of the end panel. The center panel shall be as specified in 3.2.12.2.

3.2.16 *Table, filing, L-unit, with integral filing cabinet. Type VI, single left pedestal, type VII, single right pedestal.*—The design and dimensions of the tables shall be as shown in figure 7. The table shall be sufficiently stable and rigid so that after clamping to the L-unit desk, there will be no objectionable vibrations when used with an electric typewriter. The table shall be supported at one end with a cabinet containing one letter drawer and two storage drawers. The other end shall be supported by a panel as specified in 3.2.12.1 which shall be located 1¼ inches, plus or minus 1/16 inch, from edge of top. The table shall be continuously adjustable in height from 29 inches to 30½ inches. The table shall have a back panel as specified in 3.2.12.2 running the width between the filing cabinet on one end and the end (side) panel. The back panel shall be located 1¾ inches, plus or minus 1/16 inch, from the outer edge of the top. The number, kind and inside dimensions of the drawers required shall be as shown in figure 7.

3.2.16.1 *Drawer pedestal.*—The sides and back may be formed of either one piece or three piece construction, and shall be not less than 22 gage (0.0299 inch) steel, with the top and bottom edges flanged. Front and back vertical edges shall have not less than a ¾-inch radius. Bottom flanges of sides and back are to be electric welded to the bottom which shall be not less than 20 gage (0.0359 inch) steel. The top flanges of the sides and back are to be electric welded to front and

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

rear spreader reinforcements. There shall be reinforcing uprights at front and rear corners of not less than 18 gage (0.0478 inch) steel. These uprights to be electric welded to the sides and back. Front and rear uprights are to be punched and slotted for attaching drawer suspension members. The top front and rear spreader reinforcements shall be of not less than 18 gage (0.0478 inch) steel.

3.2.16.2 *Drawers.*—The number, kind, and minimum inside clear dimensions (usable space) of the drawers required shall be as shown in figure 7. The drawer fronts shall have double wall construction. The outside drawer front of storage and letter drawers shall be not less than 20 gage (0.0359 inch) steel with the upper, side, and bottom edges formed in a channel shape at least 7/16 inches wide. The bottom and side edges shall then be flanged back and electric welded to the drawer body. The inside front is to be of not less than 26 gage (0.0179 inch) steel, to be flanged in on all sides and secured in place by electric welding of the side and bottom flanges to the drawer body or alternatively flanged on all sides snugly fit and held in place by the drawer handle bolts. Drawer bodies shall be not less than 24 gage (0.0239 inch) steel with the sides and body formed in one piece with the upper edges of the sides formed in a beaded or channel shape. Drawer back shall be not less than 22 gage (0.0299 inch) steel. Each letter file drawer shall be equipped with one suitable compressor for front to back filing. All drawers, storage and letter, shall operate on zinc, nickel, cadmium plated or black oxide finished progressive suspension with ball or roller ball bearings. Each drawer shall be equipped with a stop which will prevent drawer from falling out when fully extended but will permit easy removal of the drawer when desired.

3.2.17 *Type VIII bookcases.*— The design and dimensions of the bookcase shall be as shown in figure 8. The sides and back may be formed of one piece or three piece construction but shall be not less than 22 gage (0.0299 inch) steel with the top and bottom edges flanged. Front and back corners of bookcase to have not less than 3/4-inch radius. The 3/4-inch radius may be accomplished by application of trim end panels which are securely attached to bookcase. The bottom flanges of the sides and back are to be electric welded to the bookcase bottom. The top flanges of the sides and back are to be electric welded to the top front and rear spreader reinforcements. There shall be reinforcing uprights at front and rear corners of not less than 18 gage (0.0478 inch) steel. These uprights are to be electric welded to the sides and back. Bookcases to have interior flush linings on each side made of not less than 24 gage (0.0239 inch) steel and to be pierced at least one inch on centers to accommodate adjustable shelf. These piercings are to be located so that when the adjustable shelf is set in the center of the unit the clear height in each of the two compartments shall be a minimum of 12 inches. The shelf shall be adjustable to within at least 7 inches of either top or bottom of bookcase. The bookcase shall have one adjustable shelf formed from not less than 20 gage (0.0359 inch) steel. Front and back edges to be formed into a channel shape for rigidity and strength. Shelf shall be secured in place with a spring type retainer to permit easy adjustability. Top front and rear spreader reinforcement to be made of not less than 18 gage (0.0478 inch) steel. Bookcase bottom to be made of not less than 20 gage (0.0359 inch) steel. Bookcase shall be continuously adjustable in height from 29 to 30½ inches.

3.2.18 *Type IX, credenza.*—The design and dimensions of the credenza shall be as shown in figure 9. The credenza shall have a bookcase at either end in accordance with paragraph 3.2.17 except for height adjustment. The credenza legs shall be similar in design and position to figure 9 and shall be in accordance with paragraph 3.2.18.1. The credenza shall have a shelf above the knee space with a clearance of 3½ inches between the top of the shelf and the underside of the unit top. The shelf shall be of not less than 18 gage

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(0.0478 inch) steel and shall be formed in a channel shape at front and back and fastened securely to provide rigidity for entire unit. The unit shall be 30½ inches high. Items adjustable to this height are acceptable.

3.2.18.1 *Credenza legs.*—The credenza legs shall be similar in design and position to figure 9. The leg shall be constructed of at least 18 gage (0.0478 inch) steel. Legs shall have a corrosion-resisting plating or painted finish. Painted metal legs shall have foot sockets as specified in 3.2.18.2. Legs may be adjustable in height from 29 inches to 30½ inches. If a height adjusting device is used to achieve the 30½ inch height, it shall be as specified in 3.2.9 and shall be set at the 30½ inch height. Legs shall be attached to bookcase by a secure method which will withstand the test specified in 4.4.4.

3.2.18.2 *Foot sockets.* — Foot sockets not less than 1½ inches high of the materials specified in 3.1.4 are mandatory if a painted metal leg is used. The foot sockets shall be flush with the outside surface of the leg and shall be firmly secured by fastenings which are designed to protect floors.

3.2.19 *Type X, top assembly, desk. (For use over 2-drawer uninsulated security filing cabinets.* — (The uninsulated security filing cabinets are constructed in accordance with size I of Federal Specification AA–F–358. The outside overall dimensions of the size I cabinets are 20 13/16 inches maximum width, 28 inches maximum depth and 30⅝ inches maximum height.) The top assembly design and dimensions shall be as shown in figure 10 and shall consist of a desk top and center drawer. The desk top shall be constructed in accordance with 3.2.8 and shall be 66 inches wide and 30 inches deep. The underside of the top shall be fitted with two frames as shown in figure 10. (The frames are to fit over, but not be attached to, the two security filing cabinets.) The frames shall be constructed of ½-inch by 1-inch by 0.060-inch angle steel. The 1-inch dimension of the angle shall be attached to the top by means of at least 4 oval head sheet metal screws. To prevent scratching or damaging the finish of the filing cabinet, the inside angles of the frame shall be lined with cork and rubber cushioning material as specified in 3.2.11.15 and shall be ⅛-inch thick. Alternatively, the inside angles of the frame may be fitted with nylon buttons or glides. The center drawer shall be in accordance with 3.2.11.5 and shall be located in the space between the frames. The minimum inside dimensions of the drawer shall be 2½ inches high, 15⅞ inches wide and 18 1/16 inches deep. A lock is not required.

3.2.20 *Type XI, top assembly, desk. For use over one 2-drawer uninsulated security filing cabinet.* — (The uninsulated security filing cabinet is constructed in accordance with size I of Federal Specification AA–F–358. The outside overall dimensions of the size I cabinets are 20 13/16 inches maximum width, 28 inches maximum depth and 30⅝ inches maximum height.) The top assembly design and dimensions shall be as shown in figure 10 and shall consist of a desk top, a center drawer and one end (side) panel. The desk top shall be constructed in accordance with 3.2.8 and shall be 50 inches wide and 30 inches deep. The underside of the top shall be fitted with one frame. (The frame is to fit over, but not be attached to, one security filing cabinet.) The frame shall be constructed and shall be lined in accordance with 3.2.19. The center drawer shall be in accordance with 3.2.19 and shall be attached to the top in a position which will result in the frame and security cabinet forming a right hand pedestal. The top shall have one end (side) panel located at the opposite end to the frame. The end (side) panel shall be constructed in accordance with 3.2.12.1 and shall be adjustable in height from 29 inches to 30⅝ inches. The end (side) panel shall be 29 inches wide. To provide a top assembly which can be reversed and which can be clamped to an L-unit table as required in 3.2.10, when specified in the invitation for bids, the top shall have an end (side) panel which is 17 inches wide and a center drawer

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

which can be attached from either side of the top. The 17 inch width end (side) panel shall be in accordance with 3.2.12.1 and shall be adjustable in height from 29 inches to 30⅝ inches. Attachment of the end (side) panel to the top shall be such as to permit placing at either front or back of the side of the desk top. The center drawer rails shall be attached to the desk top so as to permit reversal of the rails to allow the center drawer to be inserted from either side of the top. The desk top shall be provided with desk edge cushioning in accordance with 3.2.11.15.

3.2.21 *Type XII, C-clamp.* — The design and dimensions of the C-clamp shall be as shown in figure 12. The C-clamp shall be constructed of cold-rolled commercial steel and shall be bright zinc plated.

3.3 Finish.—All exterior and interior steel surfaces of the furniture units except hardware, shall be prepared for painting in accordance with 3.1.5. All surfaces of the furniture units and drawers shall be enameled. The enamel shall conform to the requirements of 3.1.6. The minimum total finished film thickness on exposed enameled surfaces shall be not less than 1.0 mil. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film, and separation of colors. Special attention shall be given to the bottoms and to the interior to insure that all surfaces are adequately protected against rust. Finish shall withstand the tests specified in 4.4.3.

3.4 Identification marking.—Unless otherwise specified, each furniture unit shall be permanently marked on the underside of the top or center drawer in a plain and legible manner with the specification number, the Federal Stock Number, the month and year of manufacture, and the contractor's name or trademark, and the contract order number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with Military Standard MIL–STD–130.

3.5 Workmanship. — The furniture units shall be constructed in strict accordance with the detailed requirements specified herein and be of a similar design as shown in figures 1 through 12. The edges of all parts and sheets shall be further protected by folding, beading, flanging, or grinding to eliminate possible injury from the burrs or raw edges. The furniture units shall be free from any other defects which might affect the durability, serviceability, or appearance, and shall withstand the applicable tests specified in 4.4.1, 4.4.2, 4.4.3, and 4.4.4.

3.6 Knocked-down construction.—All desks, bookcases and credenzas shall be furnished completely set-up. All L-unit auxiliary tables may be shipped knocked-down only to the extent that back panels, end panels, tops and pedestals are packaged separately but are securely bound together so that they can be handled as one item. Type IV tables shall be shipped with double top completely assembled.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

4.1.1 *Inspection lot.*—Normally, the inspection lot size shall consist of all units submitted for inspection at one time.

4.1.2 *Sampling for inspection.*—A representative random sample shall be selected from the lot in accordance with table I. Acceptance or rejection of the lot shall be based on the number of defective units found in the sample selected and inspected, as being equal to or less than the specified acceptance number or equal to or greater than the specified rejection number of table I.

4.2 Inspection.—Furniture units shall be inspected to determine compliance with this specification as to workmanship, materials, design, details of construction, intermembering of desks and tables, hardware, finish, marking and packing. Inspection may be made at the factory by a representative of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Government at any time during process of manufacture, or at point of delivery.

TABLE I.—*Sampling for visual and dimensional inspection based on acceptable quality level (AQL) of 2.5 percent*

Lot size	Sample size	Acceptance number	Rejection number
15 and under	3	0	1
16 to 40	7	0	1
41 to 110	15	1	2
111 to 300	35	2	3
301 to 500	50	3	4
501 and over	75	4	5

Note 1.—The Government inspection may institute tightened or reduced inspection in accordance with section 9 of Military Standard MIL–STD–105.

Note 2.—The above is a single sampling procedure. Alternate double or multiple sampling procedures of alternate acceptable quality levels for different classes of defects may be specified at the discretion of the procuring agency.

4.3 Contractor inspection.—The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order (see 6.1). The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.4 Tests.

4.4.1 *Top test.*—A weight of not less than 500 pounds shall be applied to an area not to exceed 12 inches in diameter for at least 5 minutes. The test area shall be in the center of each types I through IX furniture unit top. The top shall not deflect more than ⅛ inch and shall not take on any permanent set.

4.4.2 *Bend test for steel sheets.*—The steel sheets used for parts to be formed shall withstand a 180° bend at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the bend.

4.4.3 *Test for enamel finish.*—20 gage steel panel prepared in accordance with 3.3 shall be bent at room temperature around a ¼ inch rod to 180°, without cracking, flaking or loss of adhesion of the enamel.

4.4.4 *Stability test.*—Each furniture unit types I through IX shall be abruptly upended so that all the weight is borne by the footings at each corner of the end panel while the footing is adjusted to the full 30½ inch height. The drawers of the type I and type II desks shall have a load of 100 pounds evenly distributed weight in accordance with drawer size and the drawers of the type VI and type VII auxiliary tables with integral filing cabinets shall be empty during this test. There shall be no damage to any piece of furniture.

5. PREPARATION FOR DELIVERY

(The levels of preservation, packaging and packing protection used are defined in Federal Standard No. 102 (for civil agencies only).)

5.1 Setting of height adjustment.—Prior to packaging, types I through VIII furniture units shall have all height adjustments set at the 29-inch height.

5.2 Packaging.—Packaging shall be level A or C as specified (see 6.1).

5.2.1 *Level A.*

5.2.1.1 *Types I and II.*—All drawers and sliding shelves of each type I and type II desks shall be prevented from vibration while in transit by wedging cushioning material conforming to type III of Federal Specification PPP–C–843 between the drawer and drawer frame. The sliding shelf shall be secured closed by means of minimum 3-inch wide pressure-sensitive adhesive tape conforming to type III, class 2 or 3 of Federal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Specification PPP–T–60, applied over edges of shelf and adjacent desk body. All drawers shall be secured closed by locking the center drawer. The key shall be placed in a cotton cloth drawstring bag, the bag securely knotted closed, and then securely tied to a drawer handle. Loose drawer partitions shall be wrapped in cushioning material specified or similar cushioning material and secured within the drawer with tape specified.

5.2.1.2 *Type III.*—Each type III table shall be disassembled by removing the back panel, when supplied, and the two side panels from the top. The back panel and the two side panels shall be placed on the table top and all components slip-sheeted with minimum 40-pound kraft wrapping paper conforming to grade B of Federal Specification UU–P–268. Loose hardware required to reassemble each table shall be packaged in a cotton cloth drawstring bag and the bag securely knotted closed.

5.2.1.3 *Type IV.*

5.2.1.3.1 *Style a.*—Each type IV, style a table shall be packaged as specified in 5.2.1.2 for type III table.

5.2.1.3.2 *Styles b and c.*—Each type IV, styles b and c table shall be disassembled by removing the side and back panels and pedestal from the top. The side and back panels and table top shall be slip-sheeted and placed together as specified in 5.2.1.2. The adjustable shelves in the pedestal shall be secured in place with fiberboard inserts or removed from the pedestal and slip-sheeted as specified. Loose hardware required to reassemble each table shall be packaged in a cotton cloth drawstring bag and the bag securely knotted closed.

5.2.1.4 *Type V.*—Each type V table shall be packaged as specified in 5.2.1.2 for type III table.

5.2.1.5 *Types VI and VII.*—Each type VI and VII table shall be disassembled by removing the side and back panels and pedestal from the top. The side and back panels and table top shall be slip-sheeted and placed together as specified in 5.2.1.2. All drawers in the pedestal shall be prevented from vibration while in transit by wedging cushioning material conforming to type III of Federal Specification PPP–C–843 between the drawer and drawer frame. The drawers shall be secured closed by means of tape specified in 5.2.1.1, applied over edges of drawers and drawer frames. Loose hardware required to reassemble each table shall be packaged in a cotton cloth drawstring bag and the bag securely knotted closed.

5.2.1.6 *Types VIII and IX.*—The adjustable shelf shall be secured in place or removed from each type VIII bookcase or type IX credenza and wrapped in paper specified in 5.2.1.2 and the wrap secured with tape specified in 5.2.1.1 or tape conforming to class 1 of Federal Specification UU–T–111.

5.2.1.7 *Type X.*—The drawer of each type X desk top shall be prevented from vibration and secured closed as specified in 5.2.1.5.

5.2.1.8 *Type XI.*—Each type XI desk top shall be disassembled by removing the side panel from the top. The side panel shall be placed on the desk top and slip-sheeted with paper specified in 5.2.1.2. The drawer shall be prevented from vibration and secured closed as specified in 5.2.1.5. Loose hardware required to reassemble each desk top shall be packaged in a cotton cloth drawstring bag and the bag securely knotted.

5.2.1.9 *Type XII.*—Each type XII C-clamp shall be closed to the minimum size and packaged in a snug-fitting folding or set-up paperboard box conforming to Style III, type B, class a of Federal Specification PPP–B–566 or type I, class A, style 2 of Federal Specification PPP–B–676, respectively. Box closure shall be in accordance with the appendix of Federal Specification PPP–B–676.

5.2.2 *Level C.*—Furniture shall be packaged in accordance with the manufacturer's commercial practice.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

5.3 Packing.—Packing shall be level A, B, or C as specified (see 6.1).

5.3.1 *Level A.*

5.3.1.1 *Types I and II.*—Each type I and II desk, packaged as specified in 5.2, shall be packed in a shipping container conforming to overseas type of Federal Specification PPP–B–601, or class 2, style 2 or 4 of Federal Specification PPP–B–621. The desk shall be braced, blocked, bolted, or strapped within the shipping container to prevent movement and subsequent damage to the desk. Surfaces of the desk in contact with blocks, braces, or straps shall be cushioned to prevent damage to the desk. End grain nailing shall not be used to hold blocking in place. Strapping used for anchoring shall conform to type I, class A or B of Federal Specification QQ–S–781. Each desk shall be covered with a full length shroud made of waterproof barrier-material conforming to class E–2, H–1, H–5 or M of Federal Specification UU–P–271. All seams of the shroud shall be sealed with a minimum ¾ inch width continuous seam of water-resistant adhesive conforming to Military Specification MIL–A–140. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.3.1.2 *Type III.*—Each type III table, packaged as specified in 5.2, shall be packed in a snug fitting shipping container conforming to class 2, V3c or V3s, style FPF of Federal Specification PPP–B–636. Contents shall be immobilized within the container as required with fiberboard inserts. Each shipping container shall be closed and reinforced and the contents waterproofed in accordance with the appendix of the container specification.

5.3.1.3 *Type IV.*

5.3.1.3.1 *Style a.*—Each type IV, style a table shall be packed as specified in 5.3.1.2 for type III table.

5.3.1.3.2 *Styles b and c.*—Each type IV, styles b and c table, packaged as specified in 5.2, shall be packed as specified herein. The side and back panels, table top, and loose hardware shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style FPF of Federal Specification PPP–B–636. The pedestal shelves shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style RSC of Federal Specification PPP–B–636. Contents shall be immobilized within the container as required with fiberboard inserts. Each shipping container shall be closed and reinforced and the contents waterproofed in accordance with the appendix of the container specification.

5.3.1.4 *Type V.*—Each type V table, packaged as specified in 5.2, shall be packed as specified in 5.3.1.2 for type III table.

5.3.1.5 *Types VI and VII.*—Each type VI and VII table, packaged as specified in 5.2, shall be packed as specified herein. The side and back panels, table top, and loose hardware shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style FPF of Federal Specification PPP–B–636. Contents shall be immobilized within the container as required with fiberboard inserts. The pedestal shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style RSC of Federal Specification PPP–B–636. Fiberboard inserts shall be used to protect drawer handles and to fill void between the legs and bottom of the pedestal. Each shipping container shall be closed and reinforced and the contents waterproofed in accordance with the appendix of the container specification.

5.3.1.6 *Type VIII.*—Each type VIII bookcase, packaged as specified in 5.2, shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style RSC of Federal Specification PPP–B–636. Fiberboard inserts shall be used to immobilize the adjustable shelf as required and to fill void between the legs and bottom of the bookcase.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Each shipping container shall be closed and reinforced and the contents waterproofed in accordance with the appendix of the container specification.

5.3.1.7 *Type IX.*— Each type IX credenza, packaged as specified in 5.2, shall be packed as specified in 5.3.1.1 for types I and II desks.

5.3.1.8 *Types X and XI.*—Each type X and XI desk top, packaged as specified in 5.2, shall be packed as specified in 5.3.1.2 for type III table.

5.3.1.9 *Type XII.* — Type XII C-clamps, packaged as specified in 5.2, shall be packed in a snug-fitting shipping container conforming to class 2, V3c or V3s, style RSC of Federal Specification PPP–B–636. The weight limitation of the container specification shall not be exceeded. Each shipping container shall be closed and reinforced and the contents water-proofed in accordance with the appendix of the container specification.

5.3.2 *Level B.*

5.3.2.1 *Types I, II and IX.*—Each type I and II desks and type IX credenza, packaged as specified in 5.2, shall be packed as specified in 5.3.1.1, except that shrouding shall not be required and shipping containers shall conform to domestic type, style A or B of Federal Specification PPP–B–591. Additional cleats shall be added to the bottom of the container, centered under the legs of the desk or credenza, and of sufficient width to insure that legs remain over the cleats while in transit.

5.3.2.2 *Types III, IV, V, VI, VII, VIII X, XI, and XII.*—Each type III, IV, V, VI, VII, VIII, X, XI, and XII furniture units, packaged as specified in 5.2, shall be packed as specified in 5.3.1, except that shipping containers conforming to Federal Specification PPP–B–636 shall be type I or II, class 1. Waterproofing of contents shall not be required. All flaps of the fiberboard shipping containers shall be securely sealed with an adhesive commercially used for the specific product being packed by application throughout the entire area of contact between the flaps, or by a combination of metal stitching the bottom flaps and sealing the top flaps with adhesive. In addition, style FPF shipping containers shall be tape banded in accordance with the appendix of the container specification.

5.3.3 *Level C.*—Furniture units shall be packed in containers of the type, size and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.4 **Marking.**

5.4.1 *Civil agencies.*—In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Federal Standard No. 123. Shipping containers for types III, IV, styles a, b and c, V, VI and VII tables shall be set marked as specified in Federal Standard No. 123.

5.4.2 *Military requirements.*—In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Military Standard MIL–STD–129. Shipping containers for types IV, styles b and c, VI, and VII tables shall be set-marked as specified in Military Standard MIL–STD–129.

6. NOTES

6.1 **Ordering data.** — Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, symbol, and date of this specification.

(*b*) Type required, and style or size, if applicable (see 1.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

(*c*) Whether preproduction sample is required (see 3.1.7).

(*d*) Whether linoleum or plastic tops are required (see 3.2.8.2).

(*e*) Whether legal size compressors for across the drawer filing are required (see 3.2.11.1).

(*f*) Whether sloping stationery trays are required for desks (see 3.2.11.7).

(*g*) Whether a back panel is required for type III auxiliary tables (see 3.2.13).

(*h*) Whether full or half width end panel is required (see 3.2.20).

(*i*) Identification marking desired (see 3.4).

(*j*) Inspection record details (see 4.3).

(*k*) Selection of applicable levels of packaging and packing (see 5.2 and 5.3).

(*l*) Marking requirements (see 5.4).

6.2 Intended use.—The unitized furniture covered by this specification is not intended to entirely replace standard general office desks and tables for general office use. It is designed for use in specific applications when determination has been made that (a) available floor space is insufficient for proper use of standard desks, (b) a need exists for additional desk top space in the same amount of floor space, and (c) a specific work operation requires a "work station" designed to facilitate the operation. The furniture, with the exception of the credenza which is not intended to be placed immediately next to any other piece of furniture, is adjustable in height from 29 to 30½ inches to serve a dual functional purpose. The adjustable feature insures a level worktop surface for units which must be placed in juxtaposition to each other on uneven floors, and it also provides a choice of desk top working height for greater comfort and efficiency.

All of the furniture units covered by this specification are free standing with the exception of type X and type XI desk tops, and can be arranged as necessity requires. Attachment of the desk and auxiliary table by means of a C-clamp is recommended; the clamp is furnished so that office machine vibration, uneven floors, etc., will not cause one item to separate from the other in use.

The L-unit desks are not intended to be used alone, but with any of the L-unit auxiliary tables. The auxiliary tables have been designed for specific uses. The single level auxiliary tables are intended for general clerical use and for occasional typing or office machine operation. The two-level auxiliary table is provided for full-time typing or machine operation and its typing height corresponds to that of the typewriter platform of the standard general office desk. The interview table provides a work station when interviewing and conference type work constituted the major activity and provides the facility of desk and table in space formerly required for desk alone. The auxiliary tables with integral filing cabinets provide working top area plus additional drawer space. The bookcase is intended to supplement the basic L-unit or to be used with any standard steel office furniture. The credenza is designed primarily for use with the steel conference type desk covered by Federal Specification AA–D–195, although it may be used with unitized furniture or the standard general office steel desk if the need arises. The desk tops (type X and type XI) are provided for use over the 2-drawer security filing cabinets in Federal Specification AA–F–358. The tops can be used with one or two security cabinets to form single pedestal or double pedestal desk-like arrangements.

The L-unit consists of a type I or type II desk (with a pedestal to right or left) and an auxiliary table placed at right angles to the desk. Diagram A shows the amount of floor space required for the proper use of an L-unit and for the proper use of a standard desk. (It has been determined that a minimum of 36 inches is required for use of a chair.) The floor space gained is 2.6 square feet per unit. At the same time this 2.6 square feet of floor space is saved per unit, 2.4 square feet of desk top surface is gained. When additional L-units are added to the basic L

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

arrangement, the saving in floor space is cumulative as illustrated in diagram B. Additional desk top space can be gained through use of the L-unit. Diagram C shows the amount of desk top space provided per L-unit compared to a standard desk. In many cases, efficiency can be increased by providing a "work station" incorporating the type and quantity of desk drawers, filing drawers, shelves, working top area, etc., required for a specific work operation. All records, books, office machines, can be placed within easy reach. Work stations may be formed with or without the use of partitions or partitions with attached bookshelves (see diagram D). A waste-paper basket placed under the L-unit table is more convenient to use, requires less floor space, and improves the appearance of the office.

The unitized furniture is also designed for use with many pieces of standard general office steel furniture, including certain pieces of sectional furniture covered by Federal Specification AA–F–791b, Furniture and Cabinets; Office, Sectional, Steel.

When basic units are used in group arrangements, back panels for the type III tables are not required. However, when used singly, and when the auxiliary type III table cannot be placed with its width against a wall or partition, the back panel may be desirable. The furniture units are designed for use with partitions which are covered by Federal Specification AA–P–615. Much of the floor space savings is accomplished through the use of partitions, and additional easy-to-reach work space is gained through the use of partitions with attached bookshelves.

6.3 **Transportation description.**—Transportation description and minimum weights applicable to this commodity are:

Rail:

Types I and II:

Desks, with enclosed pedestals on either side, steel, set-up.

Carload minimum weights:

In cars 40'9" or less in length, inside measurements — 10,000; 12,000; 15,000; 18,000; 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements—16,000; 18,000; 21,000; 24,000; 30,000 and 40,000 pounds.

Types III, IV, V, VI and VII:

Tables, not otherwise indexed by name, steel, other than cast-iron, knocked-down, finished.

Carload minimum weights:

In cars 40'9" or less in length, inside measurements — 10,000; 12,000; 15,000; 18,000; 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements—16,000; 18,000; 21,000; 24,000; 30,000 and 40,000 pounds.

Types VIII and IX:

Bookcases, other than sectional, set-up.

Carload minimum weights:

In cars 40'9" in length, inside measurements — 10,000; 12,000; 15,000; 18,000; 22,000 and 30,000 pounds.

In cars exceeding 40'9" in length, inside measurements—16,000; 18,000; 21,000; 24,000; 30,000 and 40,000 pounds.

Types X and XI:

Tops, flat top desk.

Carload minimum weight 30,000 pounds.

Type XII:

Clamps, hand.

Carload minimum weight 30,000 pounds.

Motor:

Types I and II:

Desks, with enclosed pedestals on either side, steel, set-up.

Truckload minimum weights:

(W)10.6; (W)12.6; (W)15.6; (W)18.6; (W)22.6; and (W)30.6 pounds, (W) subject to Rule 34, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Types III, IV, V, and VII:

Tables, not otherwise indexed, steel, knocked-down, finished.

Truckload minimum weights:

(W)10.6 (W)12.6; (W)15.6; (W) 18.6; (W)22.6 and (W)30.6 pounds, (W) subject to Rule 34, National Motor Freight Classification.

Types VIII and IX:

Bookcases, other than sectional, set-up, metallic.

Truckload minimum weights:

(W) 10.6; (W)12.6; (W)15.6; (W) 18.6; (W)22.6 and (W)30.6 pounds, (W) subject to Rule 34, National Motor Freight Classification.

Types X and XI:

Tops, flat top desk.

Truckload minimum weight (W)30.6 pounds, subject to Rule 34, National Motor Freight Classification.

Type XII:

Clamps, hand.

Truckload minimum weight (W)30.6 pounds, (W) subject to Rule 34, National Motor Freight Classification.

6.4 Federal specifications do not include all types, classes, grades, and sizes of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTEREST:


Army—Q

Navy—S

Air Force—MOAMA.


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

Desk Contains:	Minimum Inside Clear Dimensions
1 Storage Drawer	12" W x 5-19/32" H x 24-1/8" D
1 Center Drawer	15-7/8" W x 1-5/16" H x 18-1/16" D
1 Letter Drawer	12" W x 10-27/32" H x 23-15/16" D

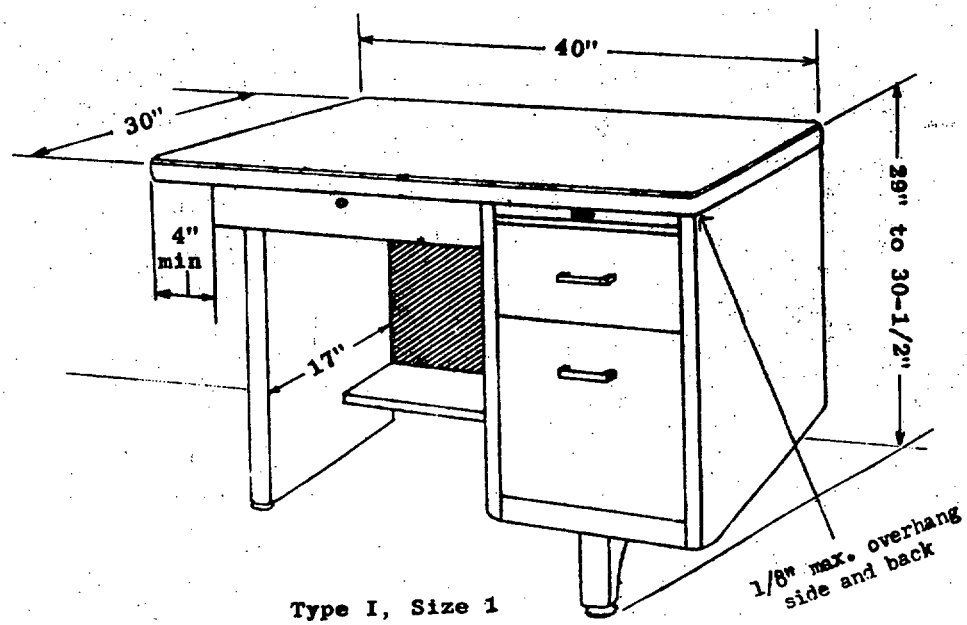

Type I, Size 1

L-Unit Desk, Single Right Pedestal

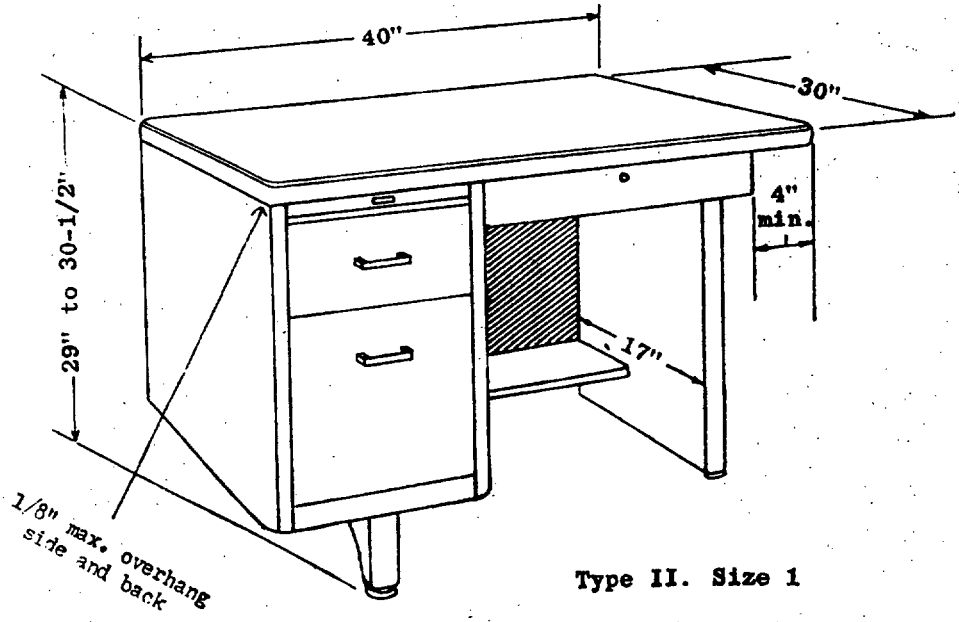


Type II. Size 1

L-Unit Desk, Single Left Pedestal

Figure 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Desk Contains:	Minimum Inside Clear Dimensions
1 Storage Drawer	12" W x 5-19/32" H x 24-1/8" D
1 Center Drawer	15-7/8" W x 1-5/16" H x 18-1/16" D
1 Letter Drawer	12" W x 10-27/32" H x 23-15/16" D

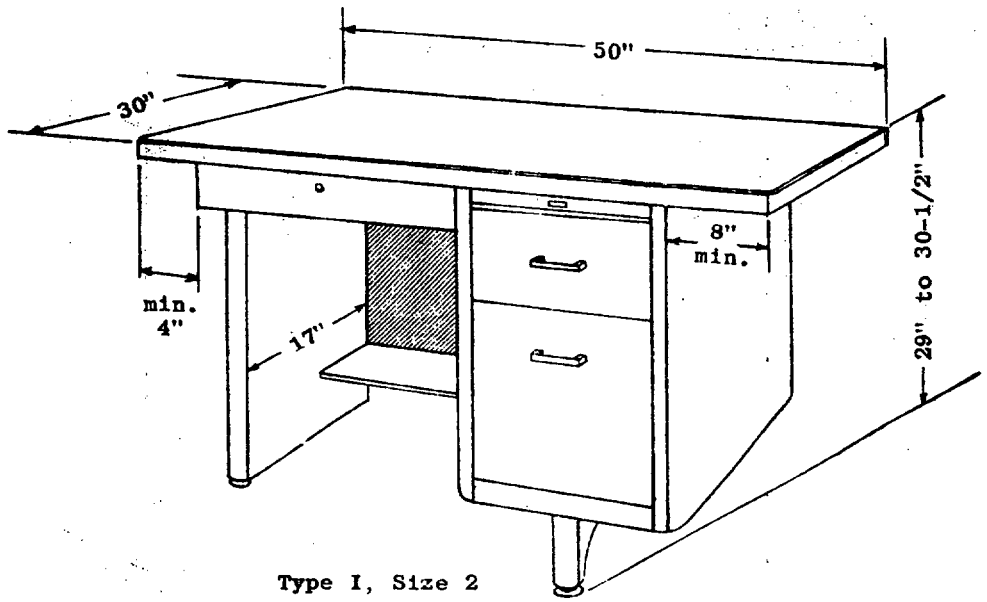

Type I, Size 2

Type I, L-Unit Desk, Single Right Pedestal

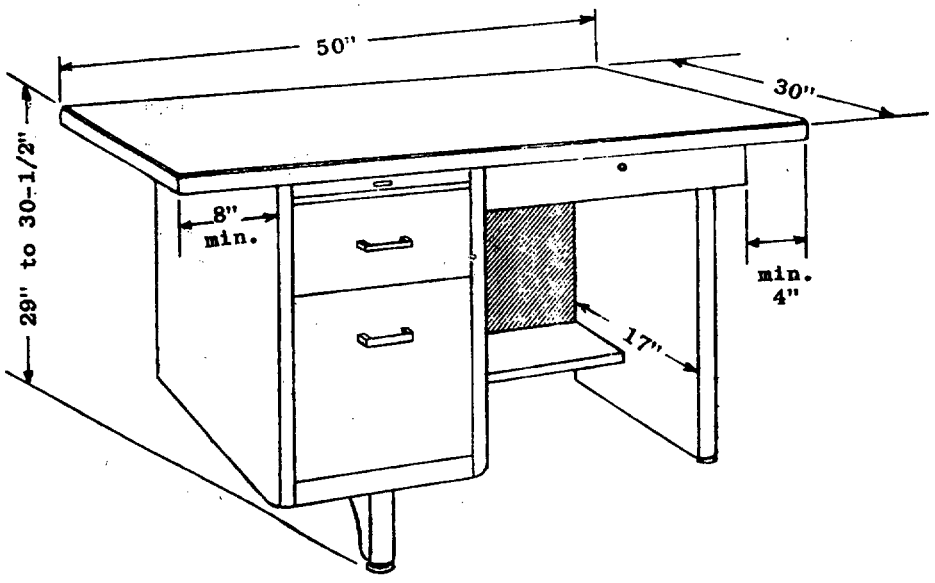


Type II, Size 2

Type II, L-Unit Desk, Single Left Pedestal

Figure 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

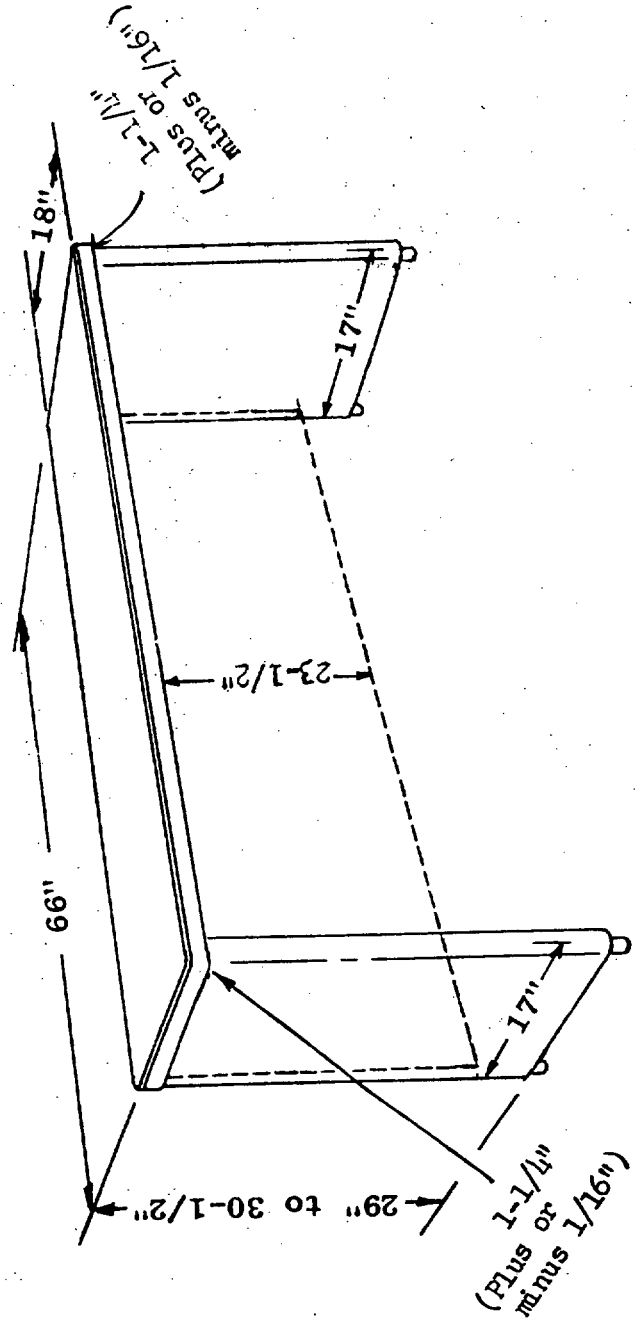

Type III, Table, Clerical, L-Unit


Figure 3

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

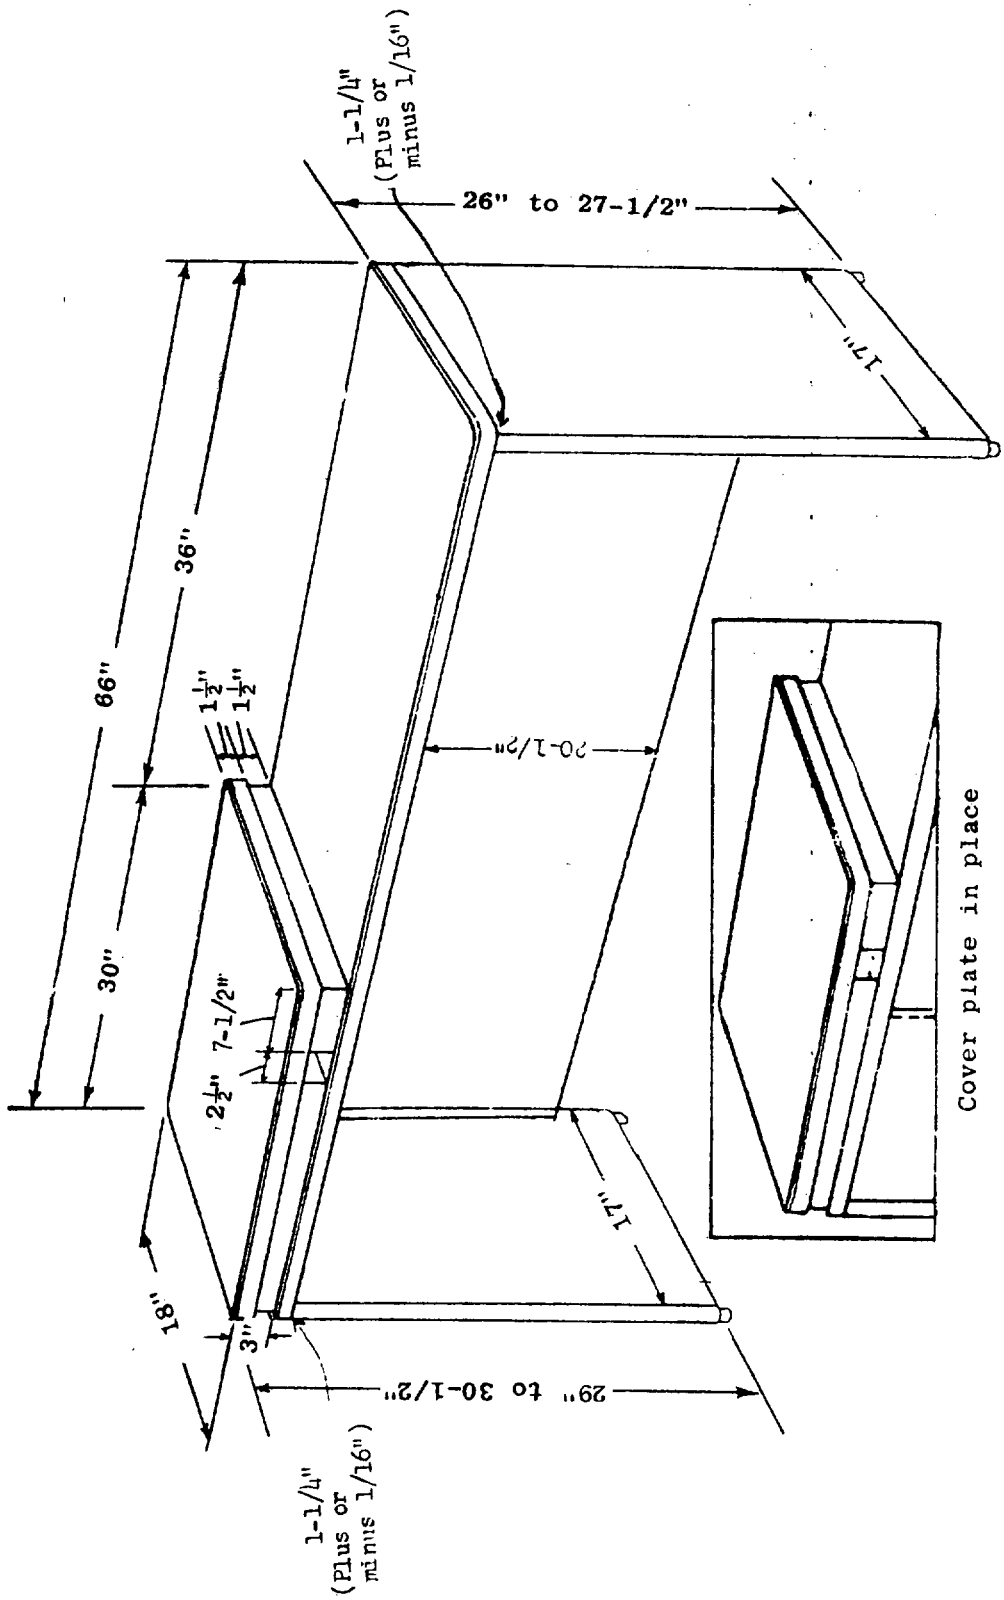


Type IV, Style a, Table, Secretarial, L-Unit
Figure 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

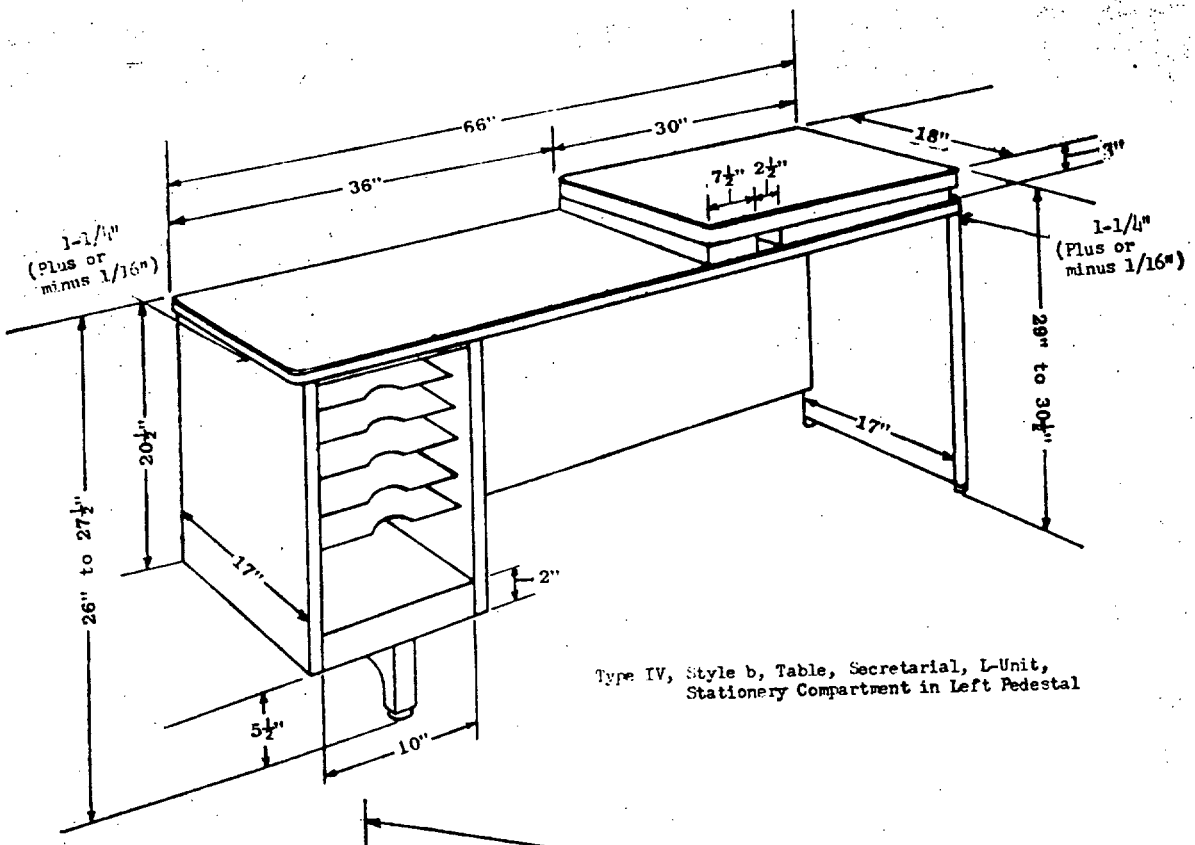


Type IV, Style b, Table, Secretarial, L-Unit,
Stationery Compartment in Left Pedestal

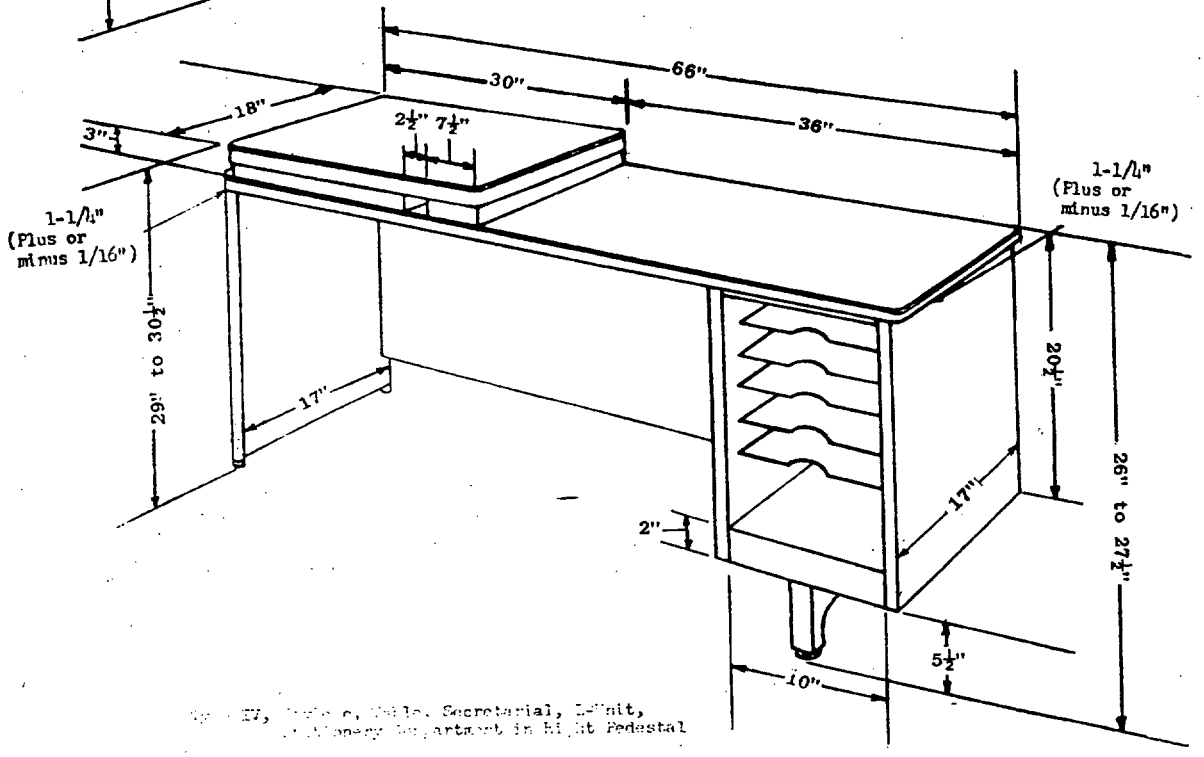

Type IV, Style c, Table, Secretarial, L-Unit,
Stationery Compartment in Right Pedestal

Figures 5

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

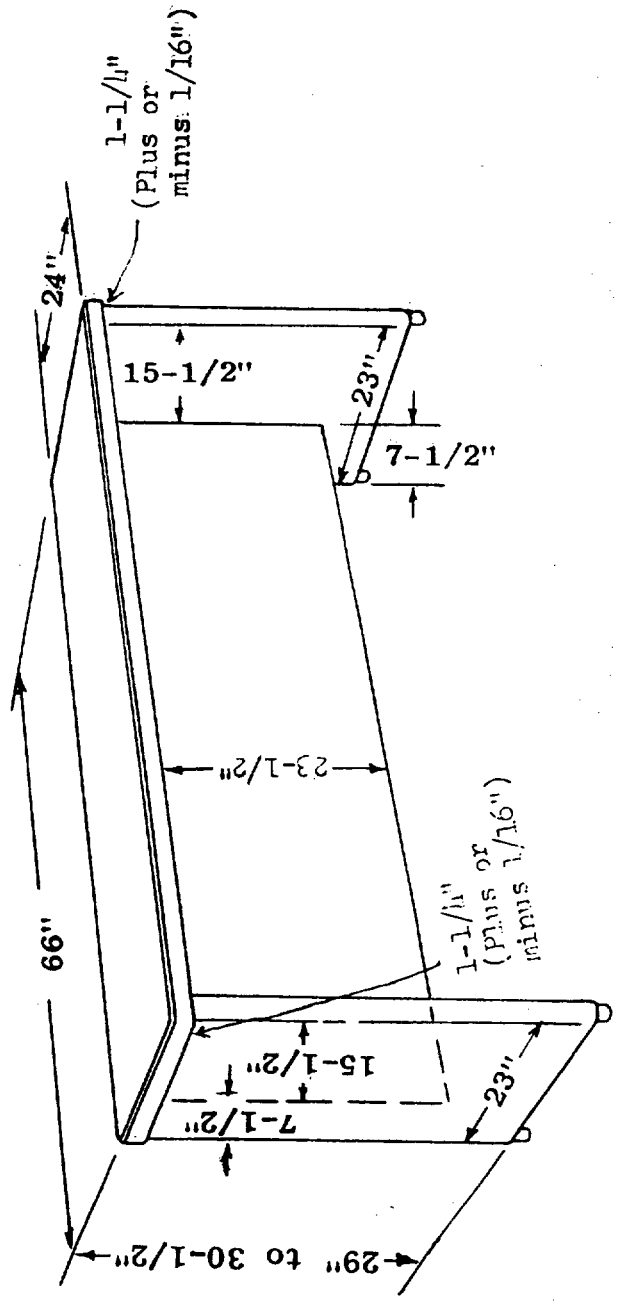


Type V, Table, Interview, L-Unit

Figure 6

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

Auxiliary Table Contains:


	Minimum Inside Clear Dimensions
2 Storage Drawers	12" W x 4-7/8" H x 15-1/4" D
1 Letter Drawer	12" W x 10-1/2" H x 15-1/4" D

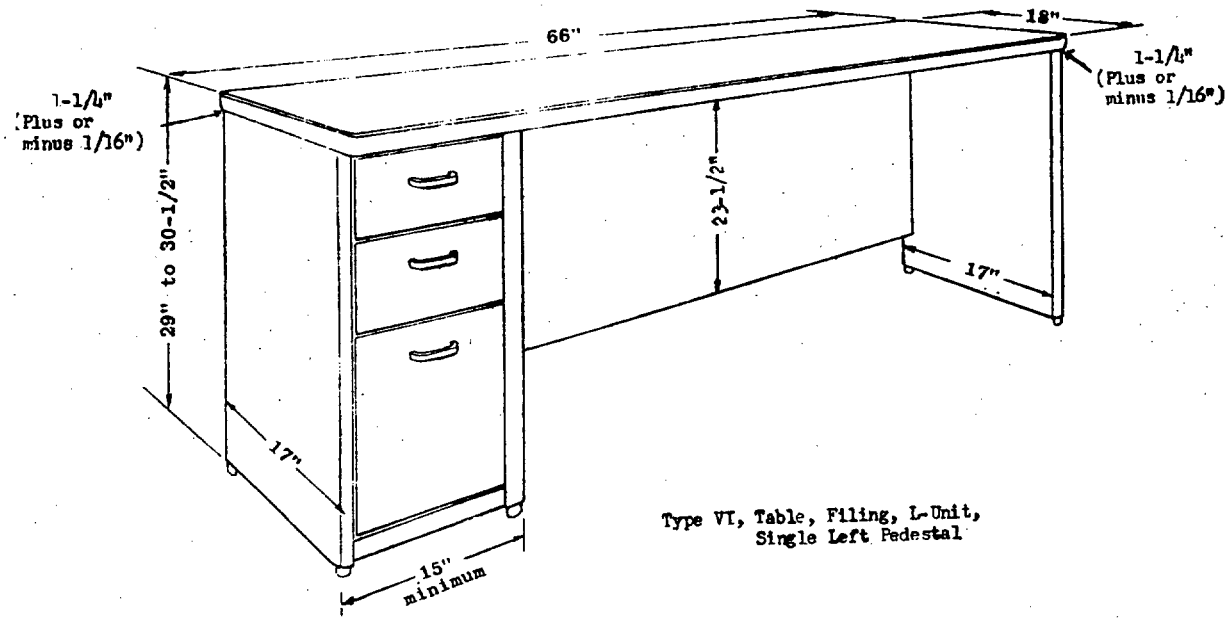

Type VI, Table, Filing, L-Unit,
Single Left Pedestal

Auxiliary Table Contains:

	Minimum Inside Clear Dimensions
2 Storage Drawers	12" W x 4-7/8" H x 15-1/4" D
1 Letter Drawer	12" W x 10-1/2" H x 15-1/4" D

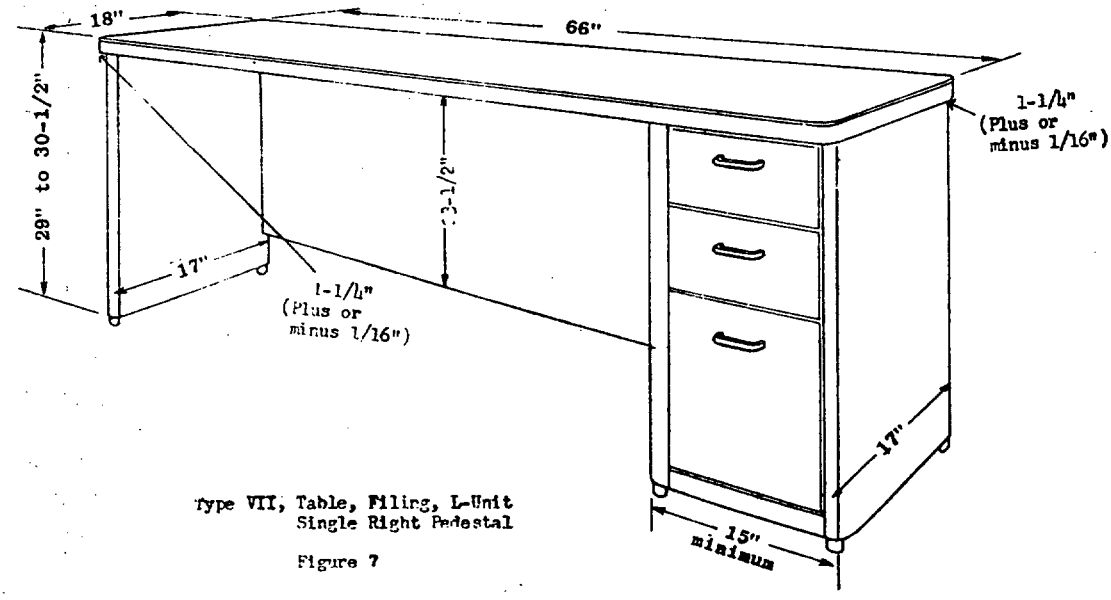

Type VII, Table, Filing, L-Unit
Single Right Pedestal

Figure 7

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.


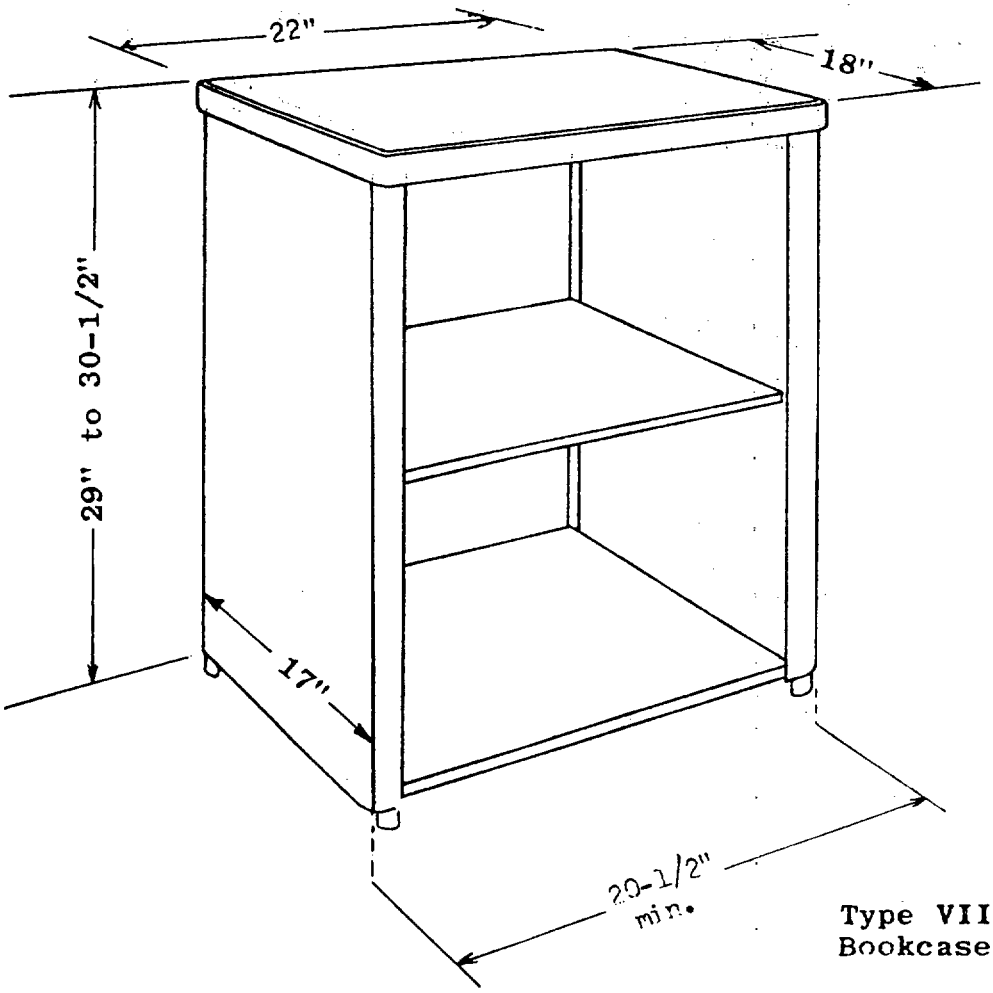


Figure 8


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

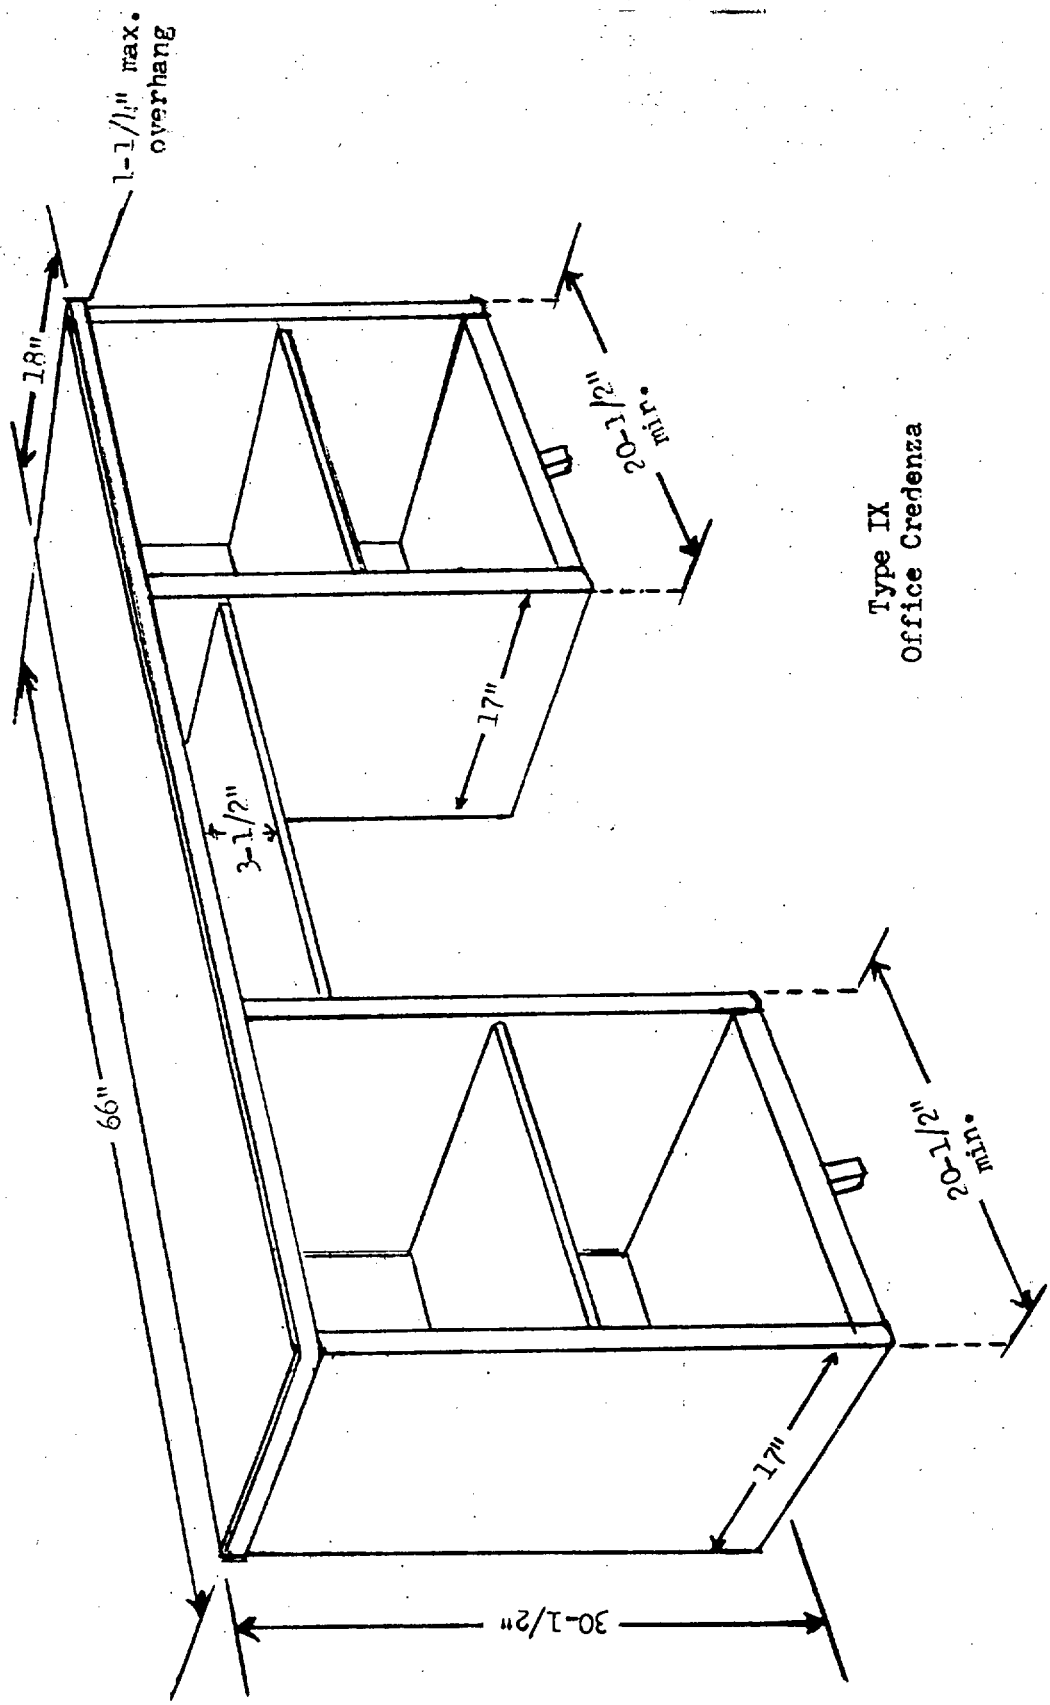

Type IX
Office Credenza

Figure 9


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

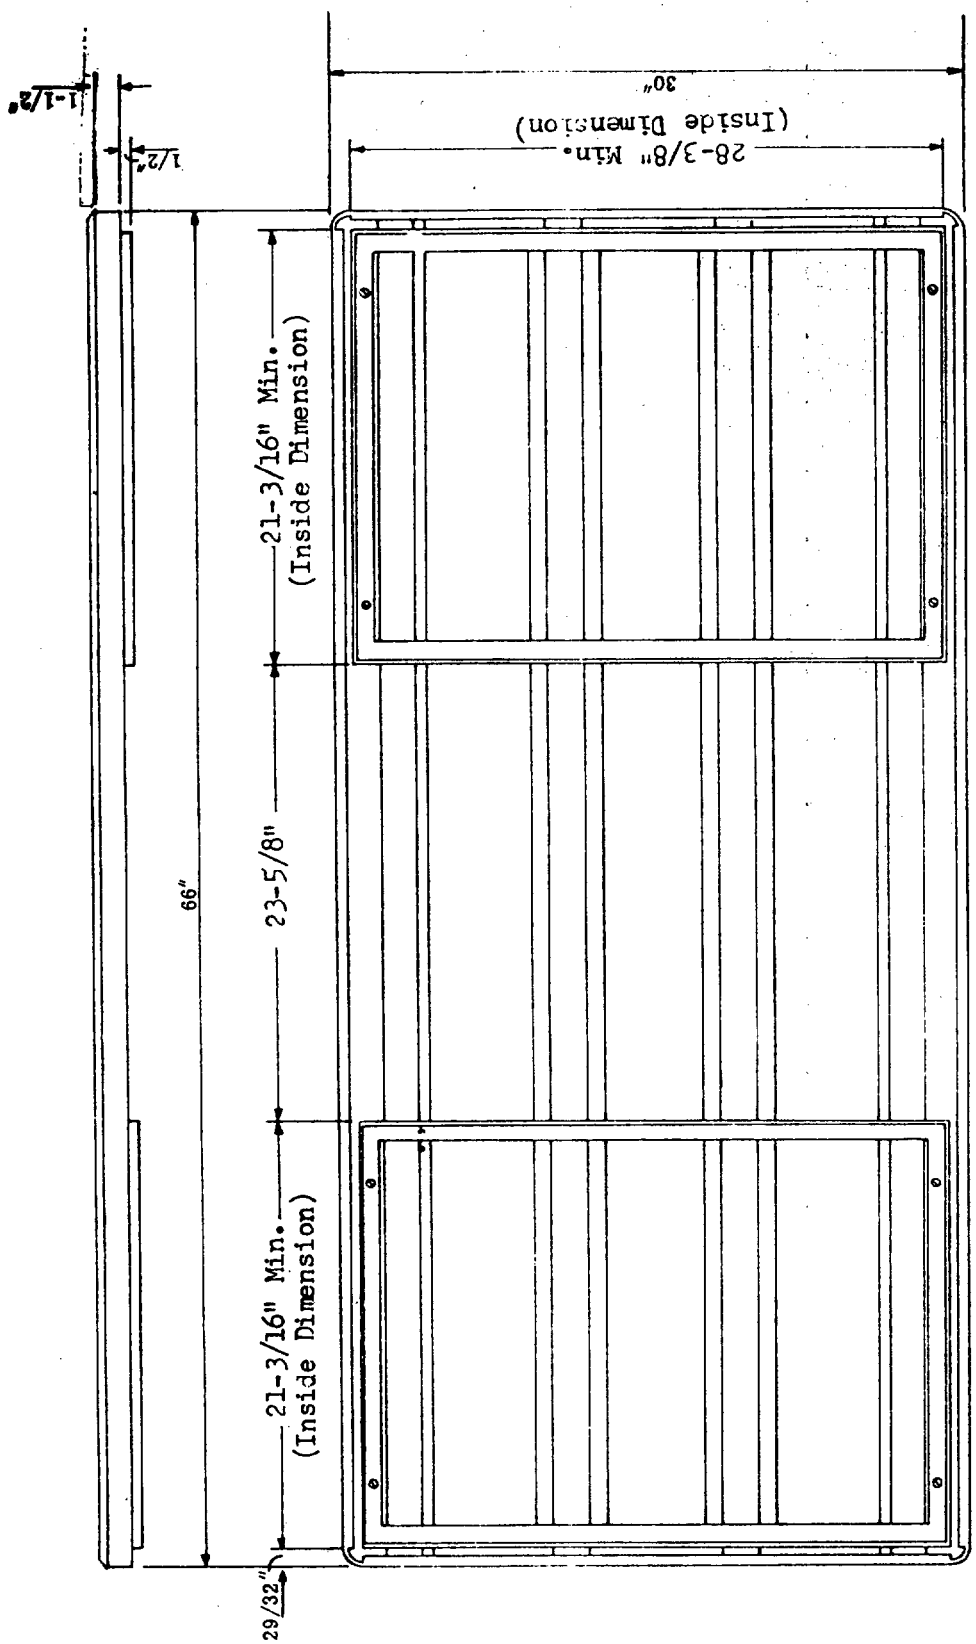

Type X, Top Assembly, Desk

Figure 10


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

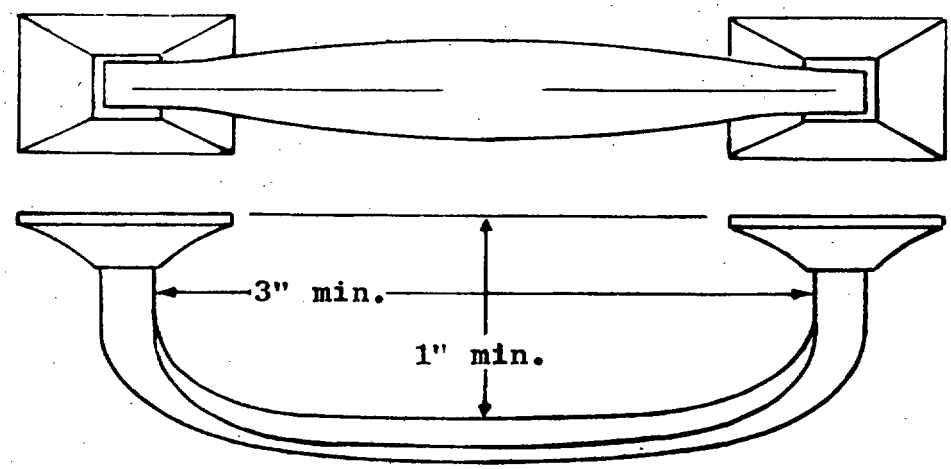

Drawer Pull


Figure 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

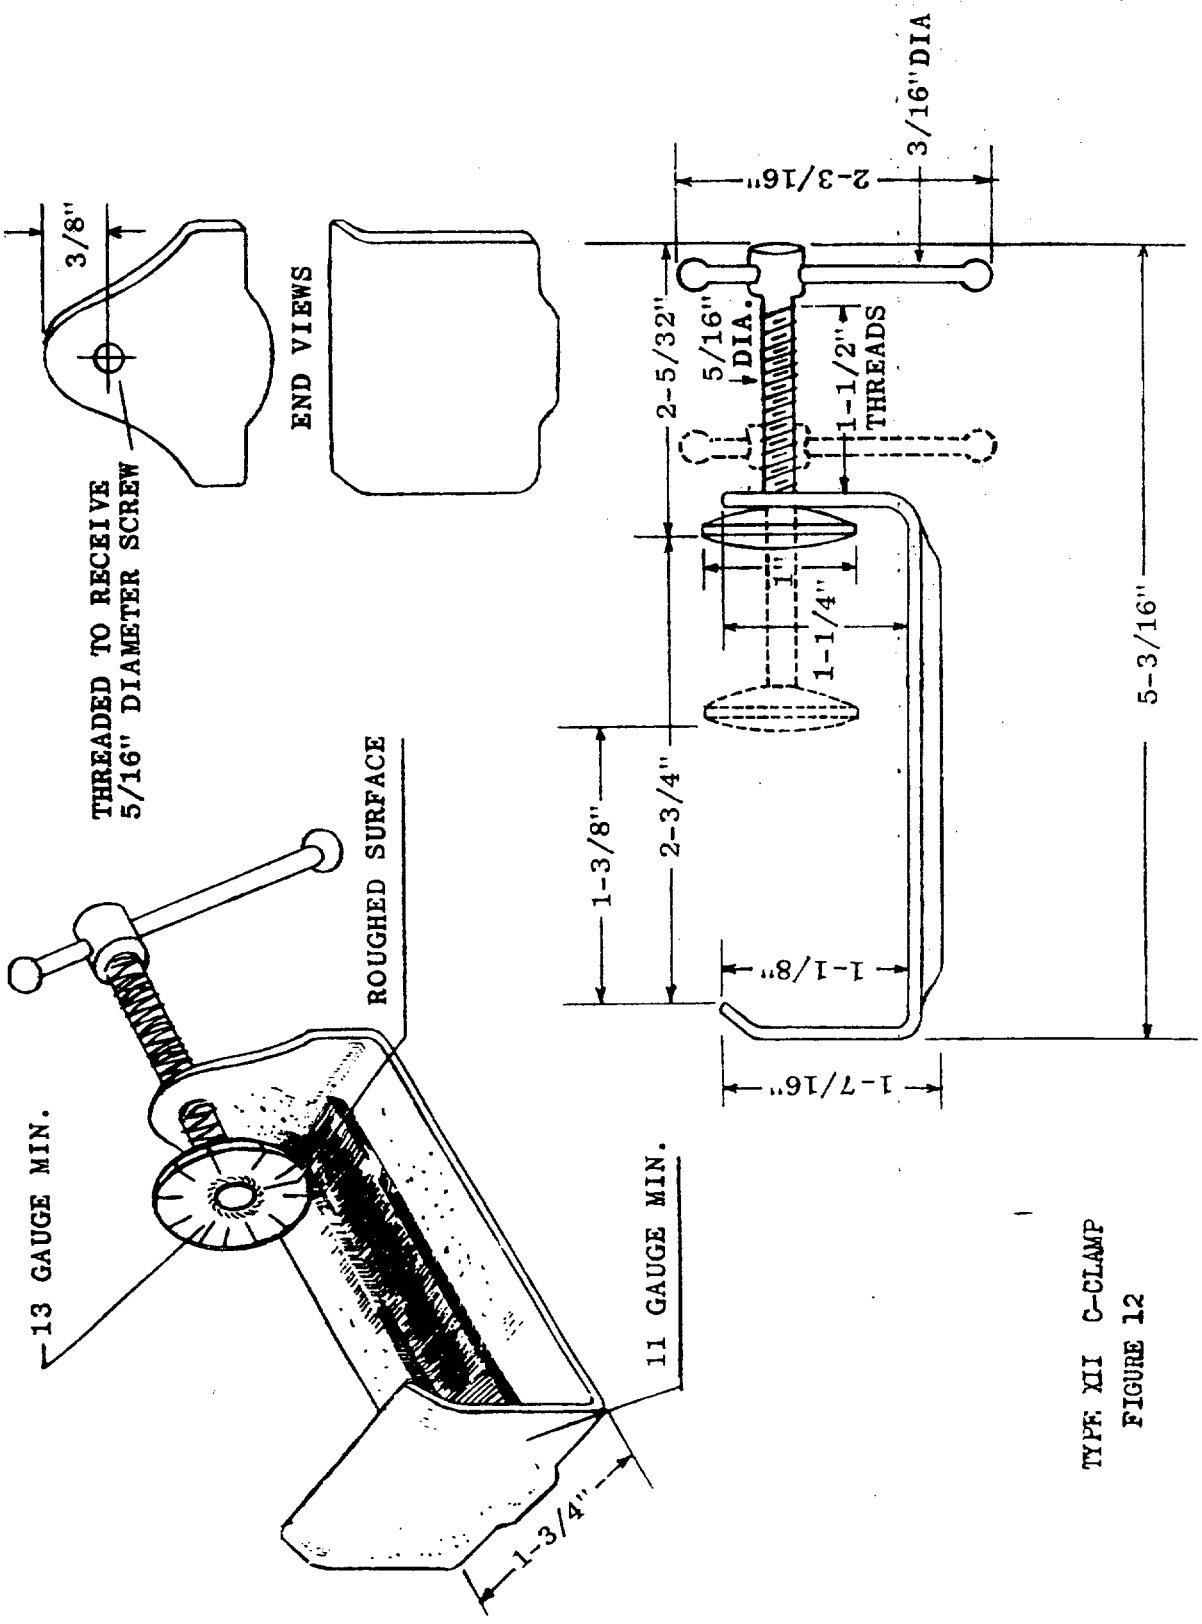

TYPE XII C-CLAMP
FIGURE 12


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

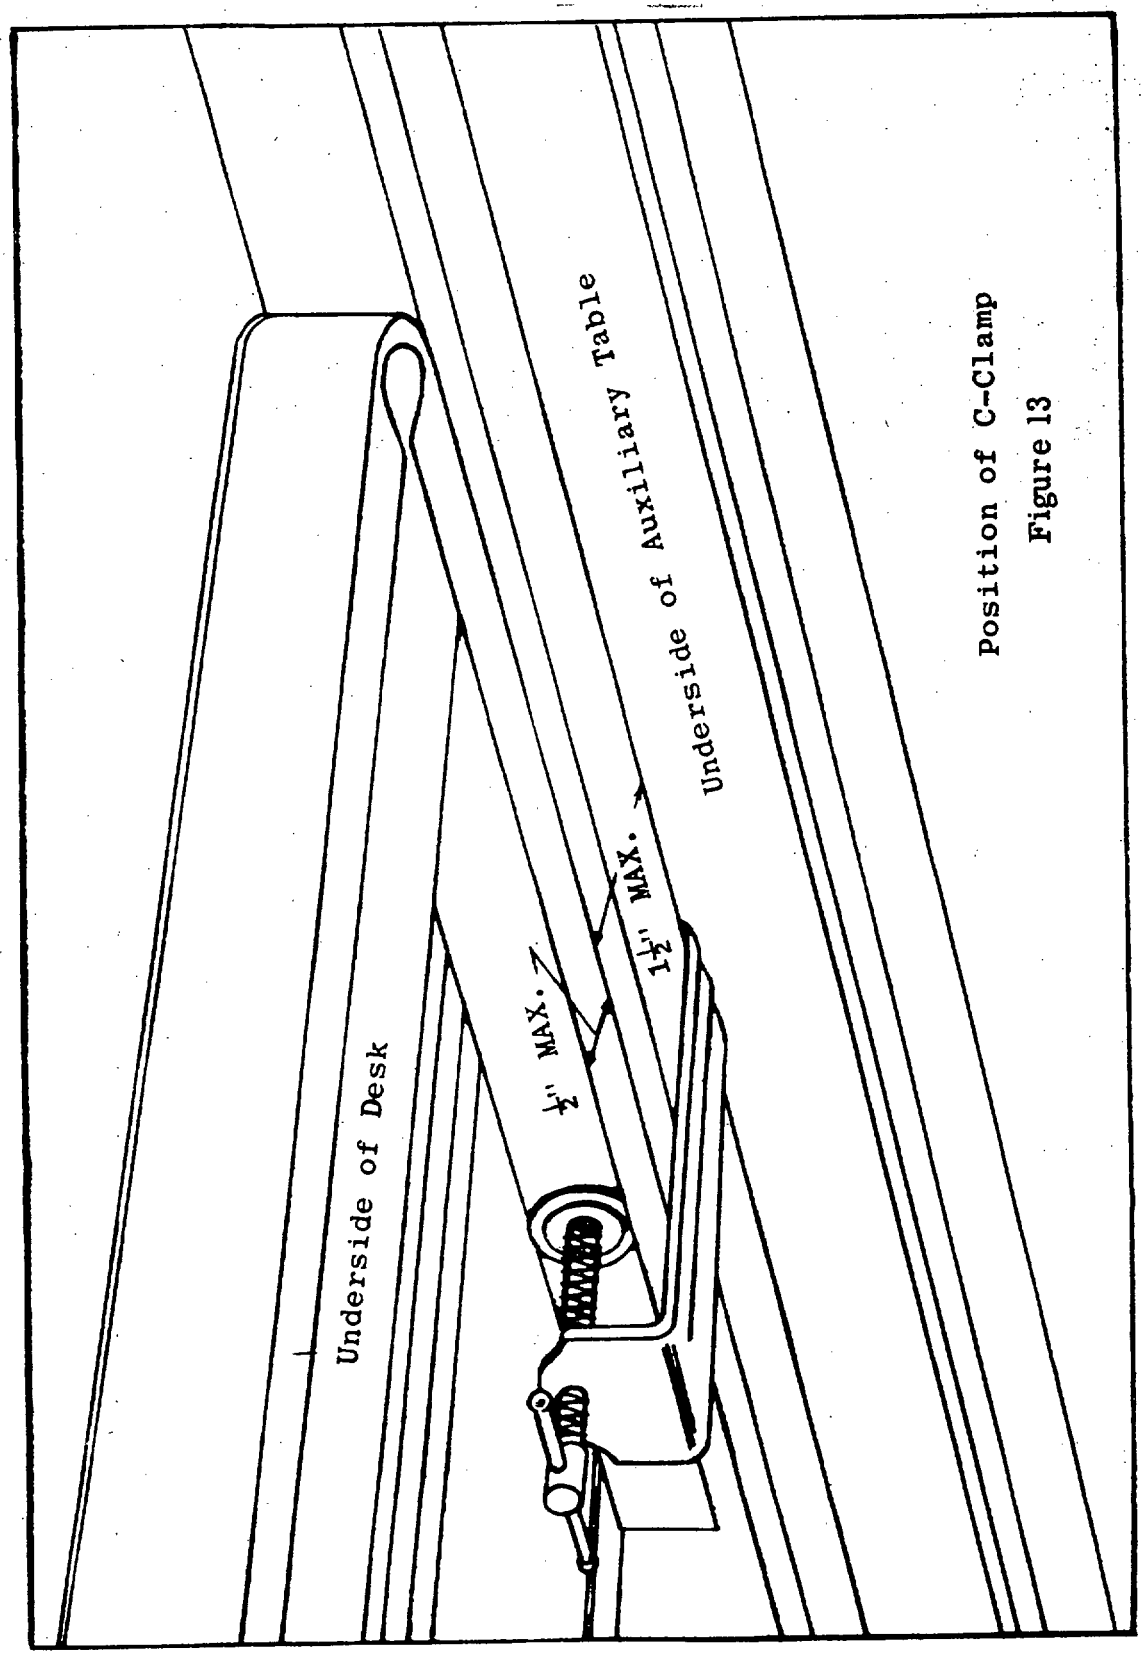


Position of C-Clamp
Figure 13

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

Diagram A




3828 sq. in. or 26.6 sq. ft. of floor space required.




4200 sq. in. or 29.2 sq. ft. of floor space required.

Diagram B

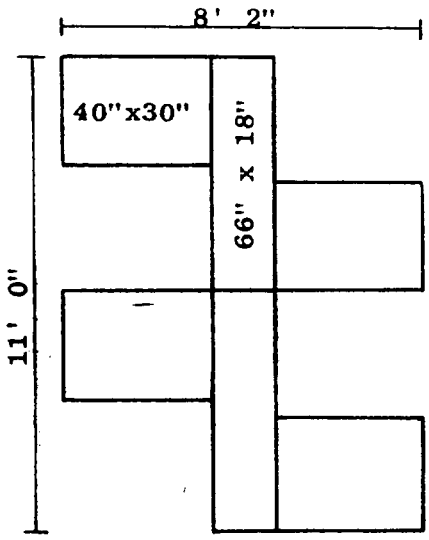

89.9 sq. ft. required.

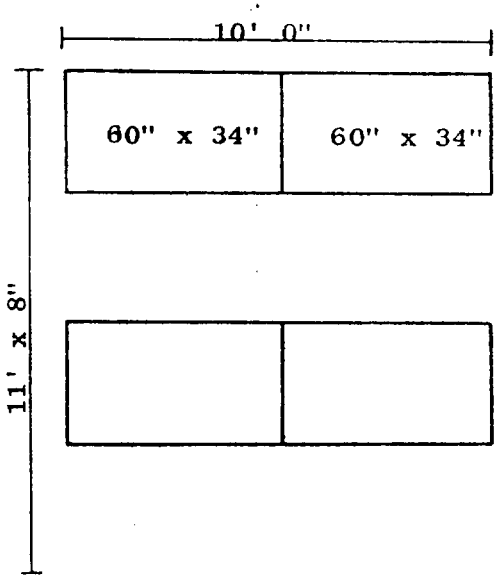

116.7 sq. ft. required.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.