BBB-R-0060a(GSA-FSS)
October 19, 1964

Revision of
Int. Fed. Spec.
BBB-R-0060(GSA-FSS)
October 31, 1963

INTERIM FEDERAL SPECIFICATION

RAINCOAT, MAN'S, LIGHTWEIGHT; COVER, CAP (RAIN), WITH DETACHABLE CAPE; AND JACKET, MAN'S (VISIBILITY)

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, D.C., 20407, based upon currently available technical information. It has been partially coordinated with industry, but has not been coordinated with Government agencies and is subject to modification. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for a lightweight raincoat, black; cap cover with detachable cape, black; and visibility cape, bright orange.

1.2 Classification.

1.2.1 Type. The raincoat, cap cover with detachable cape, and visibility jacket shall be of one type in the following sizes and colors (see 6.2):

	Sizes	Colors
Raincoat -	36 42 48 38 44 50 40 46 52	Black
Cap over with detachable cape	One size only	Black
Jacket, visibility	Small Medium Large	Bright Orange

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276 -- Thread, Cotton.
CCC-T-191 -- Textile Test Methods.
PPP-B-636 -- Box, Fiberboard.

Federal Standards:

Fed. Std. No. 102 -- Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123 -- Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 595 -- Colors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 -- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 -- Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Guide sample. Guide samples when available are furnished for guidance and information to the contractor. Variations from the specification may appear in the sample in which case the specification shall govern.

3.2 Preproduction sample. When specified (see 6.2), before production is commenced, a preproduction sample of the raincoat, cap cover with detachable cape, and visibility jacket, as applicable, shall be submitted to the contracting officer for approval.

3.3 Cloth

3.3.1 Cloth, basic. The basic cloth shall be nylon twill, two up, one down, right twill, 1.6 ozs (+ 1 oz., -2 ozs.), per sq. yd. The warp yarn shall be semi-dull, 40 denier, 13 filament yarn, with 6 to 8 turns per inch of "Z" twist. The filling yarn shall be bright, 70 denier, 34 filament yarn, with 2 to 3 turns of "Z" twist. Relaxed filling yarn shall be used to minimize pirn taper barre. The dyed uncoated cloth shall have a minimum of 116 warp yarns and 76 filling yarns per inch, with a minimum breaking strength of 50 lbs. in the warp and 50 lbs. in the filling and shall not shrink more than 2 percent in the direction of the warp, nor more than 1 percent in the direction of the filling. The cloth shall be finished to stabilize the cloth for dyeing and to minimize further shrinkage of the cloth in the coating operation. The dyed fabric prior to coating shall have not more than 2 percent residual size, finishing or other nonfibrous materials. Unless otherwise specified, the cloth shall be jet black (6.2).

3.3.2 Coated cloth. The basic cloth shall be coated with the specified coating compound on the reverse side of the fabric only, and cured. The coated fabric shall have a uniform finish and the face side shall be jet black in luster and color. The coated side of the fabric shall be dusted with an appropriate compound, non-irritating to the skin, to prevent blocking. The coated fabric shall have good colorfastness to light, wet and dry crocking, perspiration, and weather and shall meet the requirements specified in table I. Reverse side of fabric as used herein shall be the side with the twill line running up from right to left.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.3.2.1 Coating compound. The coating compound shall be a rubber copolymer of butadiene and acrylonitrile, plasticized with phosphate or phthalate ester plasticizers, and pigmented to meet the requirements of this specification; or a comparable coating compound of natural rubber, synthetic rubber, or a mixture of natural and synthetic rubber suitably formulated and pigmented, may be used if other requirements of the specification are met.

3.4 Color. The color for the raincoat and cap cover with detachable cape shall be jet black, unless otherwise specified (6.2). The color shall match the approved standard shade, when available, under natural (north sky) daylight or artificial daylight having a color temperature of 7500°Kelvin and shall be a good approximation of the standard shade under incandescent lamplight at 2800°Kelvin. When an approved standard shade is not available, the color shall approximate color number 27038 of Fed. Std. No. 595.

TABLE I. Requirements for coated fabric

	Minimum	Maximum
Overall weight of coated fabric, oz/sq. yd	3.6	4.25
Breaking strength, lbs.(Grab method):		
Warp	50	
Filling	50	
Tearing strength -		
Scale reading:		
Warp	17	
Filling	17	
Hydrostatic resistance, lbs./sq. in:		
Initial	65	
After strength (stretch) of coating	50	
After water immersion	55	
After resistance to low temperature	50	
After abrasion resistance (multidirectional)	No leak	
After 72 hours (coated side) in weatherometer	20 1/ 2/	
After 3 dry cleanings	50% of Initial result 2/	

1/ No individual determination shall be less than 15 lbs./sq. in.

2/ The test specimens shall not be soft, tacky, stiff, brittle, or papery when compared with a weathered specimen of the standard sample.

3.5 Design and construction. The design and construction of the garments shall conform to the requirements as specified hereinafter. Figure 1 shows the raincoat and cap cover with detachable cape and figure 2 shows the visibility jacket and are furnished for guidance to the contractor. In the event of differences between the requirements specified herein and figures 1 and 2, the requirements specified herein shall govern.

3.6 Raincoat. The raincoat shall be single breasted and shall be of a stitched and sealed seam construction and shall be fully waterproofed. The raincoat shall be fully cut, well balanced, raglan shoulder design with slash cut through pockets, self back yoke lining, storm fly, windcuffs. The coat shall conform to all details and dimensions as specified. The color shall be black.

3.6.1 Material.

3.6.2 Thread. The thread shall be cotton and shall conform to type IC2 of V-T-276 and shall be of sufficient size as used commercially to ensure secure and durable stitching and seaming. The thread shall be black to match the raincoat material and shall show good fastness to light, perspiration and weather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.6.3 Eyelets. Ventilating eyelets shall be made of aluminum. Outside diameter shall be 0.24 to 0.32 inch for the top flange and the inside diameter shall be 0.12 to 0.20 inch. Ventilating eyelets shall be enamelled black to comparably match the raincoat material. Eyelets for the badge holder shall be made of aluminum (0.016 inch gauge) and shall conform to the following finished requirements:

Outside diameter of the flange	0.485 to 0.500
Outside diameter of barrel	0.277 to 0.283
Diameter of the hole	0.220 to 0.230
Overall length	0.215 to 0.230

3.6.4 Seam sealant. The seam sealant shall be durable and compatible with the compound used in coating the base fabric. The sealant, when applied to the coating shall not produce a stripe materially different in color from the surrounding area.

3.6.5 Seam dusting material. All sealant and exposed reinforcement adhesive areas shall be dusted with an appropriate compound to prevent blocking.

3.6.6 Interlining. Interlining shall be cotton, plain weave, permanent finish, and approximate the following requirements: Weight - 4.0 ozs. per sq. yd.; threads per inch - 32 warp, 24 filling; breaking strength - 45 lbs. warp, 25 lbs. filling. The interlining shall not shrink more than 3 percent in the warp and 2 percent in the filling and shall be of adequate stiffness for the purpose intended. Interlining shall have good colorfastness to crocking, perspiration and weather. The use of sulfur dyes is prohibited.

3.6.7 Snaps. Shall be a non-rusting, 24 ligne, heavy duty closure with a black button for the black coats attached through all layers of material.

3.6.8 Collar. The collar and collar stand shall be made of two plies of cloth. The collar shall finish with the points measuring approximately 3 inches long at the front, and measure approximately 2-3/4 inches in width at the rear. For a size 40 coat (proportionate for other sizes in accordance with good tailoring practice); the outside measurement of the collar (point to point) shall be approximately 23-1/4 inches and the collar stand shall measure approximately 12-1/4 inches in length when measured at the seam adjoining the collar and shall be approximately 1-3/4 inches in width when measured at the center.

3.6.9 Yoke lining. The coat shall carry a self yoke lining, and shall be approximately: 8-1/2 inches in length when measured from seam on collar stand at dead center for a size 40R coat (proportionate for other sizes in accordance with good tailoring practice); 17-1/2 inches across the bottom (seam to seam); and 7-1/2 inches across the top at seam of collar stand.

3.6.10 Sleeves. Shall be a raglan style with attached windcuff (as described herein) attached by means of a single needle seam, sealed with seam sealer, and finished with an elastic insert at the bottom. The windcuff shall be approximately 6 inches in length with the attaching stitch approximately 6 inches from the bottom of the sleeve, and the cuff shall be attached in a manner that the cuff will not extend below the bottom of the sleeve when the sleeve is hanging vertically. Underarm sleeve measurement for size 40R (proportionate for other sizes in accordance with good tailoring practice) will be approximately 18 inches. Width of sleeves at bottom hem will be approximately 7-1/2 inches. Hem shall be 3/4 inch.

3.6.11 Pockets. There shall be provided one slash pocket diagonally placed on each side, with length of welt approximately 9-1/2 inches long. Pocket opening shall have a reinforcement welt of the same fabric. The inside hanging patch shall be made of basic fabric and shall be lined with nylon/cotton blend pocketing for strength and absorption. Dimensions of the hanging patch shall be 14 inches in length and approximately 11 inches in width at its widest point. Pockets shall have approximately 9-1/2 inches opening to allow access to trouser pockets or revolver. Pockets shall be bartacked to the facing at the top, center, and bottom at the edge of the facing. Center bartack will go through the top ply of the pocket and the facing to allow maximum use of the pocket area.

3.6.12 Fly. Coat shall have a double storm fly front, and shall be fastened with snap fasteners as specified. There shall be six snap fasteners, including the snap at the neck, spaced 6-1/2 inches apart. Bottom fastener will be approximately 35 inches from the top of the front. Snap fasteners will fasten through the front, the interlining, and the facings in all cases.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.6.12.1 The facing shall be approximately 6 inches in width at the top of the front for size 40R (proportionate for other sizes in accordance with good tailoring practice), tapering to 3 inches at the bottom. The storm fly shall be approximately 5 inches in width at the top tapering to 4 inches at the bottom, and shall be approximately 31 inches in length along the back edge to the top of the hinge. The storm fly shall be comprised of two plies of the basic fabric plus the interlining which will extend throughout. It shall have three snap fasteners, attached throughout all plies of fabric, and spaces approximately 10 inches apart and be positioned so that, when the snaps are fastened, the outside fronts will smoothly and accurately assume their correct position in relation to each other when the snaps on the front of the coat are snapped. The top snap of the storm fly shall be approximately 4-1/2 inches from the top of the fly. The storm fly shall be sewed to the facing, along the back edge, with 2 rows of stitching 1/4 inch apart, approximately.

3.6.13 Badge plates. Reinforced badge plates, shield type, measuring 2-1/2 inches in width and 3 inches in height shall be stitched to the left breast of the raincoat and centered 6 inches from the edge of the left front and in line with the second snap fastener from the top. There shall be two eyelets as specified spaced vertically and approximately 1-1/4 inches apart. The eyelets shall be on the outside layer of the material only. Stitching shall be waterproofed on the inside of the coat.

3.6.14 Stitch type. All seams to be of a lock stitch construction, with the sleeve seams, body joining seams, and the other double needle seams to be of a 3/16 inch gauge. The coat shall not have a shirt sleeve type construction, but shall be tailored like a topcoat, with the underarm seam offset from the side seam as in normal quality clothing tailoring. The underarm sleeve seam shall not become a continuation of the side seam. The hem of the coat shall be single stitched and shall be a 3/4 inch hem. The hem shall not be continuous all the way across the coat, but will extend from the back edge of one facing to the back edge of the other facing, as is common to quality tailoring.

3.6.15 Stitches per inch. There shall be 9 to 12 stitches per inch in all seams.

3.6.16 Hanger. Each coat shall have a hanger at least 1-1/4 inches in length inserted in the seam of the collar stand and the top of the coat, at the center.

3.6.17 Size marking. The size of the coat shall be stamped indelibly with a contrasting color at the position below the hanger of the coat and on the yoke.

3.6.18 Dimensions. Each raincoat shall conform to the following dimensions:

Size	Breast when Buttoned	Length	Sweep of coat*	Sleeve Inseam
36	46 in.	46 in.	68 in.	17
38	48 in.	48 in.	71-1/2 in.	18
40	50 in.	48 in.	73 in.	18
42	52 in.	50 in.	76 in.	19
44	54 in.	50 in.	78 in.	19
46	56 in.	50 in.	80 in.	19
48	58 in.	52 in.	82 in.	19
50 **	60 in.	52 in.	83 in.	19
52 **	62 in.	52 in.	84 in.	19

* Sweep of coat: Measured across hem allowing tolerance of ± 1/2 inch.

** Dimensions given for sizes 50 and 52 are approximations. Dimensions shall conform to good commercial practice for these sizes.

Width of sleeve (minimum) (size 42):

Cuff	-	7-1/2 in.
Elbow	-	10 in.
Armhole	-	11-1/2 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.6.19 Waterproofing. Any stitching of seams in the body of the coat, shoulder, sleeves, badge, pockets, and windcuffs which penetrates the fabric from the outside throughout the waterproof fabric to the inside shall be completely waterproofed with the seam sealer specified previously. All sealant will be dusted to be tack free after drying.

3.7 Cap cover with detachable cape - design and construction.

3.7.1 Material. The cap cover and detachable cape shall be made of coated nylon twill, same as used for the raincoat, except the weight shall be 3 ozs. per square yard.

3.7.2 Covers. The covers shall be designed to fit an 8 point police cap. The crown of the cap cover to be approximately 12 inches in diameter with sides approximately 3 inches in height. The cover to be one piece with gathering at the bottom, leaving an opening of approximately 6 inches in diameter. The opening of the cap cover to be gathered with a 3/8 inch elastic sewn into the cover. On the front of the cap cover extending approximately 1/2 the width of the cover there shall be securely sewn a slot for the visor. The slot shall be arc shaped approximately 2-1/4 inches in depth in the top portion and 1-1/2 inches in depth in the bottom portion, stitched so that the visor will fit loosely in the slot. There shall be provided on the back of the cover, securely stitched in the bottom of the cover a stand 14 inches in length and 2 inches in height for the attachment of the cape.

3.7.3 Cape. The cape shall be attached to this stand with 5 black dome shaped snap fasteners, 1/2 inch in diameter and spaced approximately 3-1/4 inches apart. The first and last snap fastener to be placed approximately one inch from each end of the stand. The cape shall be made in a semicircular shape approximately 43-1/2 inches at the bottom, and approximately 16 inches at the top. The height of the cape in the center of the rear portion to be approximately 11 inches. The front of the cape to be cut out to permit the face of the wearer to show and to fasten at the bottom with two 1/2 inch black dome shaped snap fasteners, spaced 3-1/4 inches apart. The front opening to start 5-1/4 inches from the bottom of the cover, and shall have a width of approximately 5 inches in the center.

3.7.4 Grippers. All grippers are to be attached to a double thickness of the material with facing of one inch. All edges of the material to be turned under and stitched with a matching mercerized thread.

3.7.5 Eyelets. There shall be two black eyelets on the front stand of the black cap covers and centered vertically on the visor. The bottom eyelet shall be one inch above outside seam when elastic is inserted and the top eyelet shall be in a vertical line 1-3/4 inches above the bottom eyelet so that the cap plate may be mounted to the cap through the cap cover.

3.8 Visibility jacket - design and construction.

3.8.1 Material. The visibility jacket shall be made of coated nylon twill, same as used for the raincoat, except that the color shall be bright orange unless otherwise specified (6.2). When fluorescent orange is specified (6.2), the minimum weight of the cloth shall be 3.0 ozs. per sq. yd. and the maximum 4.25 oz. per sq. yd. Thread shall approximately match the color of the jacket material.

3.8.2 Style. To be jacket design, sleeveless, single breasted without collar. The jacket to close in front with 3 nickel finish snap fasteners, 1/2 inch in diameter and shall be spaced approximately 7-1/2 inches apart. The top snap shall be placed approximately 3/4 inches from top of garment. Front overlap of jacket shall be approximately 2-1/4 inches wide, and shall be of same material as jacket. Facings shall be interlined with first quality buckram. The snaps shall be attached through both layers of material. Neck of jacket shall be faced with self-material approximately one inch wide.

3.8.3 Seams, stitching and size measurements. Body seams, shoulder seams and armhole bindings shall be double stitched 3/8 inch with thread comparably matching the color of the jacket and sealed with sealant same as body of coat. Bottom of jacket shall be turned under and double stitched 1/4 inch. Each jacket shall conform to the following dimensions:

	Length	Breast	Armhole
Large	25 in.	60 in.	29-1/2 in.
Medium	24 in.	56 in.	27-1/2 in.
Small	23 in.	52 in.	23 in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.9 Patterns. Patterns will not be furnished by the Government. The contractor shall furnish necessary patterns for manufacture of the garments covered by this specification.

3.10 Workmanship. The end items shall conform to the quality and grade of product established by this specification. Occurrence of defects shall be limited by the acceptable quality levels established herein.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES.

4.1 Responsibility for inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample. When required (3.2), inspection of the preproduction sample shall be made of a completed raincoat, cap cover with detachable cape, and/or visibility cape, as applicable, for compliance with the requirements of this specification.

4.3 Sampling and inspection for acceptance. Sampling and inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

4.3.1 In-process inspection. Inspection shall be made at any point or during any phase of the manufacturing process to determine whether operations are accomplished as specified. The Government reserves the right to exclude from consideration for acceptance any material on which in-process inspection has indicated nonconformance.

4.3.2 Inspection of the end item.

4.3.2.1 Examination of end items. The end items shall be examined for the following defects in design, material, construction and workmanship.

Examine	Defect	Classification	
		Major	Minor
Material defect and damages	Hole or tear.	X	
	Uncoated area.	X	
	Thinly coated area.		X
	Separation of coating from base fabric.	X	
	Cracked or checked coating.	X	
	Blister or lump.		X
	Material defects and workmanship damages affecting appearance or seriously affecting serviceability.	X	
	Material defects and workmanship damages slightly affecting serviceability.		X
Color and shade	Wrong color.	X	
	Any outside part shaded.	X	
Cleanness	One or more spots or stains of a permanent nature.	X	
	One or more removable spots or stains clearly noticeable.		X
	Thread ends not trimmed.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Continued.

Components and assembly	Any component part or required operation omitted.	X	
Cutting	Any component part not cut in accordance with specified requirements.	X	
Seams and stitching	Any part of garment caught in any unrelated operations or stitching.	X	
	Seams twisted, puckered or pleated affecting appearance.		X
	Any open seam: less than 1/2 inch		X
	1/2 inch or more	X	
	Raw edges on the outside: less than 3/4 inch		X
	3/4 inch or more	X	
	Loose tension resulting in a loose seam.	X	
	Tight tension (stitches break when normal strain is applied to seam or stitching.)	X	
	Incorrect number of stiches per inch.		X
	Any specified bartack missing	X	
	Wrong shade of thread on outside of garment, affecting appearance.		X
Raincoat: Collar	Collar not properly set.		X
	Irregular, affecting appearance.	X	
	Corners of collar points poorly shaped or not of uniform shape seriously affecting appearance.		X
Shoulders	Improperly set.	X	
Sleeves	Sleeves of improper fullness.	X	
	Sleeves twisted, tight or short.	X	
	Sleeve bottom edge noticeably uneven.		X
Windcuffs	Improperly attached.		X
	Cuff extends below bottom of sleeve when sleeve is hanging vertically.		X
Yoke lining	Improperly cut or attached		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Continued.

Pockets	Other than slash pockets.	X	
	Reinforcement welt not as specified.	X	
	Pocketing material not as specified.	X	
	Pocket opening not as specified.	X	
Fly	Fly front construction not as specified.	X	
	Excessive fullness.		X
Badge plates	Badge plate reinforcement construction not as specified.		X
Hanger	Omitted or ends not securely attached to coat.		X
	Off center.		X
Cap cover	Incorrect design.	X	
	Cover not one piece.		X
	Gathering improperly constructed.		X
	Slot for visor incorrectly constructed.	X	
Detachable cape	Cape not semicircular.		X
	Cut out in front of cape does not permit face of wearer to show.	X	
Visibility jacket	Incorrect design and construction.	X	
	Neck of jacket not faced as specified.		X
Seam dusting material	Exposed reinforcement adhesive areas not dusted with powder as specified.		X
Waterproofing	Missing or incorrectly applied.	X	
Snap fasteners and eyelets	Incorrect type.		X
	Made of material improperly or not treated for corrosion resistance.	X	
	Improperly located on respective garments.	X	
	Not securely attached.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.3.2.2 Examination for dimensional characteristics. Examination shall be made of the end item to determine compliance with dimensional requirements. Any dimension not within the specified requirements shall be classified as a defect.

4.3.2.3 Inspection levels and acceptable quality levels (AQL's). Inspection levels and acceptable quality levels, expressed in defects per hundred units shall be as follows. The sample unit shall be one raincoat, cap cover with detachable cape or visibility jacket or combination of these garments as prepared for shipment.

	Inspection level		AQL
For examination applicable to 4.3.2.1	II	Major	1.5
		Total	6.5
For examination applicable to 4.3.2.2	L-6	Total	4.0

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored in accordance with the table listed below. The sample unit shall be one shipping container fully packed, selected prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per one hundred units.

Examine	Defect
Marking (exterior or interior)	Omitted,incorrect, illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, any component damaged, affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number of items per container is more or less than specified. Number of items per bundle is more or less than specified. 1/

1/ For this defect one bundle shall be examined from each shipping container in the sample.

4.4 Tests. Wherever applicable, tests shown in tables II and III shall be conducted in accordance with CCC-T-191. Unless otherwise specified, the inspection level for testing shall be L-1 of MIL-STD-105 and the AQL for each characteristic tested shall be 6.5 defects per hundred units.

4.4.1 Weatherometer. The test shall be performed for 72 hours as specified in method 5804 of CCC-T-191 with the coated side exposed. The sample size for the weatherometer shall be approximately 9-1/2 inches in width, and 26 inches in length. After exposure, the sample shall be oven dried at 125 ± 10°F. for a period of 2 hours and conditioned at standard temperature and relative humidity for a period of 24 hours. This sample shall then be visually examined for compliance with footnote 2/ of table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

TABLE II-Test Methods, Base Fabric

Characteristic	Test method	Number of determinations per individual unit of product	Results reported for each unit of product
Fiber identification	1530	1	Pass or fail.
Yarn construction Denier	4020 1/	4	Average of 4 determinations to nearest whole number.
Twist	4052	5	Average of 5 determinations to nearest whole number.
Filament	Visual	1	Pass or fail.
Weave	Visual	1	Pass or fail.
Yarns per inch (each direction)	5050	5	Average of 5 determinations to nearest whole number.
Weight	5041	5	Average of 5 determinations to nearest 1.0 oz.
Breaking strength (each direction)	5100	5	Average of 5 determinations to nearest 1.0 lb.
Nonfibrous material	2611	2	Average of 2 determinations to nearest 0.1%.
Shrinkage (each direction)	5552	3	Average of 3 determinations to nearest 0.1%.

1/ Except use 120 yard skein. The denier calculated as follows: Weight of skein in grain X 5.315.

TABLE III - Test Methods, Coated Fabric

Characteristic	Test method	Number of determinations per individual unit of product	Results reported for each unit of product
Weight	5041	5	Average of 5 determinations to nearest 0.1 oz.
Breaking strength (each direction)	5100	5	Average of 5 determinations to nearest 1.0 lb.
Tearing strength (each direction)	5132 1/	5	Average of 5 determinations to nearest full scale div.
Hydrostatic resistance: Initial	5512 2/	5	Average of 5 determinations to nearest lb/sq. in.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Continued.

After strength (stretch) of coating	5512 2/ and 5972 3/	5	Average of 5 determinations to nearest lb/sq. in.
After water immersion	5512 2/ 4/	5	Average of 5 determinations to nearest lb/sq. in.
After resistance to low temperature	5512 2/ and 5874 5/	5	Average of 5 determinations to nearest lb/sq. in.
After abrasion resistance	5512 2/ and 5302 6/	5	Pass or fail.
After weathering	5512 2/ and par. 4.4.1	5	Average of 5 determinations to nearest lb/sq. in.
After 3 dry cleanings	5512 2/ and 5508	5	Average of 5 determinations to nearest lb/sq. in.
Blocking (200°F.)	5872	1	Pass or fail.
Fastness to light	5660 7/	1	Pass or fail.
Fastness to wet and dry crocking	5650	1	Pass or fail.
Fastness to perspiration	5682	1	Pass or fail.
Fastness to weather	5671	1	Pass or fail.

1/ Standard Elmendorf with augmenting weight.

2/ Water pressure shall be applied to the uncoated side of the fabric only. If leakage occurs under 5 p.s.i. on one of the five specimens, that reading shall be discarded and another specimen shall be tested. If leakage occurs on more than one of the five specimens, all readings shall be valid. The specimen shall be free from coating defects.

3/ A 20 pound load shall be applied parallel to the twill line only.

4/ The test specimen shall be immersed in water at 70 ± 2°F. for 2 hours, withdrawn from the water, the excess water blotted from the surface and the specimen tested immediately.

5/ Test specimens shall be exposed to a temperature of 0 ± 5°F. for not less than 4 hours prior to test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Continued.

6/ A solid rubber diaphragm 0.030 ± 0.010 inches thick (no metallic contact) shall be used. Air pressure of 3 p.s.i. shall be applied to the diaphragm and a load of 0.50 lbs. applied to the abradant, using the uncoated side of the coated fabric as the abradant and changing the abradant for each specimen tested. The coated side of the specimen shall be abraded 50 double strokes, removed from the abrading machine and shall withstand 10 p.s.i. water pressure for a period of 3 minutes. The water pressure shall drop no more than 2 p.s.i. during this 3 minute period.

7/ The uncoated side only shall be exposed for a period of 40 hours. Calibration papers are not required when the standard sample is available.

5. PREPARATION FOR DELIVERY

(Federal Standard No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civil agencies).

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A or B.

5.1.1.1 Raincoats. Each raincoat shall be fully fastened,laid flat with the front down, then evenly folded lengthwise, once from each outer edge. The coat shall then be folded twice in length. Five folded raincoats, of one size only, shall be stacked with every other one reversed, one on another and tied with cotton twine or tape, approximately 4 inches from each end to form a compact bundle.

5.1.1.2 Cap cover with detachable cape. Five covers with detachable capes shall be packaged in a box conforming to PPP-B-636, type CF, class domestic, style RSC. The box shall be closed and sealed in accordance with the appendix to the box specification.

5.1.1.3 Visibility jacket. Each jacket shall be fully buttoned laid flat with the front down then evenly folded lengthwise, once from each outer edge. The jacket shall then be folded lengthwise. Five folded jackets, of one size only, shall be stacked with every other one reversed, one on another and tied with cotton twine or tape, approximately 4 inches from each end to form a compact bundle.

5.1.2 Level C. The raincoats, cap covers with detachable capes, and visibility jackets shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

5.2.1 Level A. Unless otherwise specified (see 6.2), 25 raincoats; 25 cap covers with detachable capes; or 25 visibility jackets, packaged as specified in 5.1, shall be separately packed in a close-fitting box conforming to PPP-B-636, V3c, style RSC. The boxes shall be closed, sealed, waterproof sealed with tape, and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.2.2 Level B. The raincoats, cap covers with detachable capes, and visibility jackets shall be packed as specified in 5.2.1 except that waterproof sealing with tape shall not be required and the container shall be type I and class 1.

5.2.3 Level C. The raincoats, cap covers with detachable capes, and visibility jackets shall be packed to insure carrier acceptance and safe delivery to destination in containers complying with the rules and regulations applicable to the mode of transportation.

5.3 Marking

5.3.1 Civil agencies. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military activities. In addition to markings required by the contract or order, the packages and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The black lightweight raincoat and cap cover with detachable cape are intended for wear by police or guard personnel in rain, storm and under equivalent climatic conditions. The visibility jacket is intended for wear for high visibility under varying climatic conditions, day and night.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Color if other than specified (see 1.2.1, 3.3.1, 3.4 and 3.8.1).

(c) Size required (see 1.2.1).

(d) When preproduction sample is required (see 3.2).

(e) Applicable levels of packaging and packing (see 5.1 and 5.2).

6.2.1 The items covered by this specification can be ordered as entire ensembles, or as individual items as follows:

Raincoat, or
Cap Cover with detachable cape, or
Visibility jacket

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Clothing, not otherwise indexed by name.
Carload minimum weight 15,000 pounds, subject to Rule 34,
Uniform Freight Classification.

Motor:

Clothing, not otherwise indexed.
Truckload minimum weight 12,000 pounds, subject to Rule 115,
National Motor Freight Classification.

GSA DC 65-6452

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.



FIGURE 1

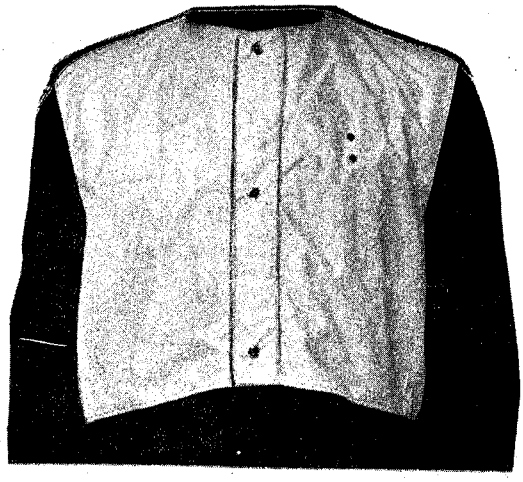


FIGURE 2 - Visibility jacket over raincoat

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.