BBB-S-1269B
September 28, 1973
SUPERSEDING
Fed. Spec. BBB-S-1269A
June 24, 1971

FEDERAL SPECIFICATION

SWEAT PANTS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for knitted, cotton fleeced sweat pants.

1.2 Classification.

1.2.1 The sweat pants shall be of one type in the following classes and sizes, as specified (see 6.2).

Class 1 - White.
Class 2 - Silver gray.
Class 3 - Nickel gray.

Schedule of sizes

Small	Large
Medium	Extra large

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276	-	Thread, Cotton.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
ZZ-B-111	-	Bands, Rubber.

FSC 8415

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

DDD-L-20 - Label; For Clothing, Equipage, and Tentage (General Use).
PPP-B-636 - Boxes, Shipping, Fiberboard.

Federal Standards:

FED-STD-123 - Marking for Domestic Shipment (Civil Agencies).
FED-STD-191 - Textile Test Methods.
FED-STD-751 - Stitches, Seams, and Stitching.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers, at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Ft. Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

PUBLICATION:

Rules and Regulations under the Flammable Fabrics Act

(Copies may be obtained from the Federal Trade Commissioner, Washington, D. C. 20580.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:28Z
Check the source to verify that this is the currenversion before use.

The Color Association of the United States, Inc.

Standard Color Cards of America, 9th Edition.

(Copies may be obtained from The Textile Color Card Association of the United States, Inc., 200 Madison Avenue, New York, N. Y., 10016.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago Illinois 60606.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.2 Materials. No flame retardant finish shall be permitted and the end item must meet the Flammable Fabrics Act requirements.

3.2.1 Knitting yarn. The knitting yarn for the fleece backing shall be a blend of cotton and polyester or cotton and acrylic fibers composed of a maximum of fifty-three (53) percent polyester or acrylic of the total fiber content by weight. The knitting yarn for the facing, tie-in and ribbed knit cloth shall be cotton; or a blend of polyester/cotton or acrylic/cotton fibers with the synthetic portion not to exceed 53 percent by weight. Testing shall be as specified in 4.4.1.1.

3.2.2 Knitted cloth.

3.2.2.1 Jersey knit cloth. The cloth for the body shall be jersey knit. When silver gray or nickel gray color is required, it shall be constructed with a silver gray or nickel gray colored facing yarn, a natural colored tie-in-yarn, and a natural colored backing yarn. The cloth shall be well napped on the back.

3.2.2.2 Rib knit cloth. The cloth for the waistband shall be 1 by 1 rib knit, constructed with two sets of yarn. For silver gray or nickel gray colored cloth, one yarn shall be a natural color and the other yarn a silver gray or nickel gray colored yarn.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.2.2.3 Physical requirements. The knitted cloth shall meet the requirements of table I when tested as specified in 4.4.1.1.

TABLE I. Physical requirements

Characteristics	Jersey knit cloth	Ribbed knit cloth
	Minimum	Minimum
Wales per inch	20	20
Courses per inch	24	22
Bursting strength (pounds)	65	80
Weight (oz./sq.yd.) 1/	6.75	7.0
Thickness (inches at 0.01 psi)	0.080	-

1/ Based on single thickness of the cloth.

3.2.2.4 Nonfibrous material content. The starch and protein content, including chloroform-soluble material of the finished cloth shall not exceed 3.0 percent when tested as specified in 4.4.1.1.

3.2.2.5 Color. The color of the knitted cloth for class 1 pants shall be white (bleached). The color of the knitted cloth for class 2 pants shall be silver gray to approximately match cable number 70151. The color of the knitted cloth for class 3 pants shall be nickel gray to approximately match cable number 70152. The shades of color and cable numbers designated are included in the Standard Color Card of America. The use of dyes and compounds containing elementary sulfur capable of oxidation to sulfuric acid is prohibited. The dyestuff shall be chosen and applied so that the dyed and finished cloth shall contain no more labile sulfur than shown by the standard sample when tested as specified in 4.4.1.1. When a standard sample is not available, the dyed and finished cloth shall show no more than a slight trace of labile sulfur as defined in the test method specified in 4.4.1.1.

3.2.2.5.1 Colorfastness. The dyed knitted cloth shall show good colorfastness to perspiration and laundering when tested as specified in 4.4.1.1.

3.2.2.6 pH. The pH value of the water extract of the knitted cloth shall be not less than 5.5 nor more than 8.5 when tested as specified in 4.4.1.1.

3.2.3 Waist tie cord. The tie cord which is inserted for the waist shall be a tubular braided or knitted cotton cord, 1/4 ± 1/32 inch wide and weighing not less than 0.10 ounces per linear yard. The end of the tie cord shall be knotted (see figure I). The finished length of the cord shall be not less than 16 inches longer than the circumference of the waistband. The color of the cord shall be white (bleached).

Source: https://assist.dla.mil -- Downloaded: 20261O-26T12:28Z
Check the source to verify that this is the currentversion before use.

3.2.4 Elastic band. The rubber elastic band for the leg bottoms shall conform to size no. 64 of ZZ-B-111, except that the width shall be 1/4 to 5/16 inch.

3.2.5 Thread cotton. The cotton thread for seaming and stitching shall be ticket numbers 50 and 70, 3 ply, type 1A2 or 1A3, and ticket number 30, 2 ply, type IC1 or IC2 of V-T-276. The color of the thread shall match the color of the knitted cloth. The dyed thread shall show good colorfastness to perspiration and laundering.

3.2.6 Sewing yarn. The cover and looper thread used with stitch type 606 and the cover thread used with stitch type 607 shall be combed peeler cotton sewing yarn conforming to the requirements specified in table II. The color of the yarn shall match the color of the knitted cloth. The dyed yarn shall show good colorfastness to perspiration and laundering when tested as specified in 4.4.1.1.

TABLE II. Requirements for sewing yarn

Yarn sizes	Yards per lb. (min.)	Breaking strength (min.)
30/2	11,000	1.65 lbs.
28/1	21,000	0.50 lbs.

3.2.7 Labels.

3.2.7.1 Identification and size label (see 3.2.7.3). Each pair of pants shall have a combination identification and size woven loop label (see last operation of table III) conforming to class 4 of DDD-L-20. The end item is intended to be laundered.

3.2.7.2 Instruction label (see 3.2.7.3). Each pair of pants shall have an instruction woven loop label (see last operation in table III) conforming to class 3 of DDD-L-20. The end item is intended to be laundered. The content shall be as follows:

CARE INSTRUCTIONS

Hand or machine wash in cold or warm water. Line dry or tumble dry at low or medium setting (max. 150°F).

3.2.7.3 The identification, size and instruction labels (care label) may be combined into one combination woven loop label.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.3 Design. The pants shall be ankle length, closed front with a seamless waistband, waist tie cord, crotch gusset, and elastic leg bottoms.

3.4 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figure, the written specification shall govern.

3.5 Construction.

3.5.1 Manufacturing operation requirements. The pants shall be manufactured in accordance with the operation requirements specified in table III. The waistband shall be made of double thickness of rib knit cloth. The supplier is not required to follow the exact sequence of operations.

3.5.1.1 Stitches, seams and stitchings. Stitches, seams, and stitching types specified in table III shall conform to FED-STD-751.

3.5.1.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table III.

TABLE III. Manufacturing operation requirements

Operation	Stitch type	Seam type	Stitches per inch	Thread		
				Cover	Needle	Bobbin or looper
Inseam legs, attach crotch gusset and close front and seat	606 or	FSa-1	10-12	30/2	70-3	28/1
	607 or	FSa-1	10-12	30/2	70-3	70-3
	504 and	SSa-1	10-12	50-3	50-3	50-3
	406	SSh-2	10-12	--	50-3	30-2
Make straight button hole barred at both ends, 5/8 ± 1/16 inch finished cut, in waistband as shown on figure 1.	304	--	40-50 per button hole	--	50-3	50-3
Attach and cover-stitch waistband (see 3.2.3)	504 and	SSa-1	10-12	50-3	50-3	50-3
	406	SSh-2	10-12	--	50-3	30-2
Hem leg bottoms, 1 inch min. width, with elastic band inclosed.	406	EFa-1 1/	10-12	--	50-3	30-2

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:28Z
Check the source to verify that this is the current version before use.

TABLE III.. Manufacturing operation requirements (cont'd)

Operation	Stitch type	Seam type	Stitches per inch	Thread		
				Cover	Needle	Bobbin or looper
Attach each label, vertical direction only, to center back just below waistband on inside of pants.	301	--	6-8	--	50-3	50-3

1/ Cover stitch shall cover raw edges of hem.

3.6 Finished measurements. The finished measurements shall be as specified in table IV. All measurements shall be in inches.

TABLE IV. Finished measurements

	Figure 1	Small	Medium	Large	X-large	Tolerance
Waist 1/	A	13	14	15	16	± 1/2
Seat width 2/	B	21-1/2	22-1/2	23-1/2	24	-1/2 + 1
Thigh width 3/	C	9	10	11	12	± 1/2
Length 4/	D	41	43	45	47	± 1
Rise 5/	E	17	17-1/2	18	18-1/2	± 1/2
Waistband	F	4-1/4	4-1/4	4-1/4	4-1/4	± 1/4

1/ Waist (relaxed) 1/2 of waist measured between outside edges of waistband.

2/ Half (1/2) seat, measured across the garment at the fullest part between the crotch and the waistband.

3/ Half (1/2) thigh, measured across the leg front at the fullest part below the crotch line.

4/ Length measurement shall be taken from top outside edge of waistband to bottom of leg.

5/ Rise measurement shall be taken from bottom of crotch area to top edge of waistband at center.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.7 Workmanship. The finished sweat pants shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When required (see 6.2), the preproduction sample submitted in accordance with 3.1, shall be visually inspected for appearance and color. The sample shall be tested for physical and chemical characteristics in accordance with 4.4.1.1.

4.4 Quality conformance inspection. Sampling for inspection and acceptance shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Inspection of components and materials. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.4.1.1 Testing of components. In addition to the quality assurance provisions of the referenced specifications, components and materials listed in table VI shall be tested for the characteristics shown therein. The methods of testing specified in FED-STD-191, wherever applicable and as specified herein, shall be followed. For the knitted cloth and the leg band elastic, the lot size shall be expressed in units of one yard each and the sample unit shall

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:28Z
Check the source to verify that this is the currentversion before use.

be one yard. For the sewing and knitting yarn, the lot size shall be expressed in units of one spool, cone or tube and the sample unit shall be one spool, cone or tube. All test reports shall contain the individual values utilized in expressing the final result. The sample size shall be in accordance with table V and the lot shall be unacceptable if one or more units fail to meet any requirement specified.

TABLE V. Sample size

Lot size	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE VI. Component tests

Material	Characteristic	Requirement referenced	Test method
Materials	Flammability	3.2	1/
Knitting yarn	Cotton identification	3.2.1	1200 2/
	Acrylic or polyester identification	3.2.1	2/
	Acrylic or polyester fiber content	3.2.1	2/
Knitted cloth	Type of knit:		
	Rib	3.2.2.2	Visual 3/
	Jersey	3.2.2.2	Visual 3/
	Texture:		
	Wales per inch	Table I	5070
	Courses per inch	Table I	5070
	Bursting strength	Table I	5120
	Weight (oz./sq.yd.)	Table I	5041
	Thickness (jersey cloth only)	Table I	4.4.1.1.1 2/
	Nonfibrous material	3.2.2.4	2611
	Labile sulfur	3.2.2.5	2020
	Colorfastness (classes 2 and 3):		
	Perspiration	3.2.2.5.1	5680
	Laundering (after 3 cycles)	3.2.2.5.1	5610 4/ 5/
	pH	3.2.2.6	2811

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:28Z
Check the source to verify that this is the current version before use.

TABLE VI. Component tests (cont'd)

Material	Characteristics	Requirement referenced	Test method
Cotton cord	Material identification	3.2.3	1200 2/
	Construction	3.2.3	2/
	Width	3.2.3	2/
	Length	3.2.3	2/
	Weight	3.2.3	2/
Elastic band	Width	3.2.4	2/
Sewing yarn	Combed peeler cotton	3.2.6	2/
	Colorfastness (dyed yarn):		
	Perspiration	3.2.6	5680
	Laundering (after 3 cycles)	3.2.6	5610 4/ 5/
	Yarn size	Table II	4021
	Ply	Table II	Visual 3/
	Yards per pound	Table II	4010
	Breaking strength	Table II	4100

1/ The supplier shall certify that no flame retardant finish was applied and that the end item meets the Flammable Fabrics Act requirements.

2/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirements.

3/ One determination per sample unit and the results reported as "pass" or "fail".

4/ The test shall consist of three (3) complete laundering cycles.

5/ Only the stain on the type of fibers used in paragraph 3.2.1 shall be evaluated in the transfer cloth.

4.4.1.1.1 Thickness test.

4.4.1.1.1.1 Preparation of specimen. The specimen shall be cut from different parts of a full width sample and shall measure not less than 6 inches by 6 inches. The specimen shall always be larger than the pressure foot on the test apparatus.

4.4.1.1.1.2 Apparatus. The test apparatus shall consist of a base plate and a circular pressure plate with a minimum bearing surface of 20 square inches, and a means of applying 0.01 pounds per square inch loading on the sample. This pressure shall be evenly distributed over the 20 square inch area. The thickness measuring device shall be capable of measuring the thickness of the sample (distance between base and pressure plate) to an accuracy of 0.001 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.4.1.1.1.3 Procedure. The pressure foot is applied to the fabric, and the thickness reading under 0.01 pounds per square inch is recorded.

4.4.1.1.1.4 Report. Five specimens shall be tested from each sample unit. The results shall be reported as the average of the five specimens tested and reported separately to the nearest 0.001 inch.

4.4.2 Examination of the end item. Defects found during this examination shall be classified in accordance with the lists shown in 4.4.2.1 and 4.4.2.2. The sample unit for these examinations shall be one finished pair of sweat pants. The lot size shall be expressed in units of one finished pair of sweat pants. The inspection levels and acceptable quality levels for these examinations shall be in accordance with 4.4.2.3.

4.4.2.1 Visual examination. The finished sweat pants shall be visually examined for defects listed in table VII.

TABLE VII. Classification of defects

Examine	Defect	Classification Major	Minor
Material defects	Hole, cut, tear, drop stitch, thin area, mends-any.	X	
	Uneven, ridgy or cockled cloth		X
	Fleeced cloth not well napped on inside.		X
	Slubby yarn more than three times normal diameter of yarn and clearly visible on outside of pants. 1/		X
Color	Color or shade not as specified.	X	
Cleanness	Spots and stains.		X
	Rancid bad odor.	X	
Components	Any component part missing, improperly inserted or other than specified.	X	
	Waistband not double thickness of rib knit cloth.	X	
Construction	Any operation omitted or other than specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

TABLE VII. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Seams and stitching	Seam and stitch type not as specified.	X	
	Any seam twisted, puckered or pulled, affecting appearance.		X
	Needle chew.	X	
	Tight tension (stitches break when normal strain is applied to seam or stitching).	X	
	Loose tension resulting in a loosely secured seam.		X
	Any part of garment badly pleated, caught or twisted in any unrelated row of stitching.	X	
	Stitches per inch more or less than specified.		X
	Two or more thread ends not trimmed.		X
Open seams (any broken stitch or two or more continuous skipped stitches)	Any open seam.	X	
Raw edge	Any protrusion of more than 1/4 inch along 1/2 inch or more of seam		X
Label	Missing, incorrect, illegible or not properly stitched.		X

1/ At normal inspection distance (approximately 3 feet).

4.4.2.2 Dimensional examination. The finished sweat pants shall be examined to determine compliance with dimensional requirements contained in table IV. Any measurement beyond the specified dimension (including tolerances) shall be classified as a defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels expressed in defects per 100 units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL Major	AQL (Major and Minor combined)
4.4.2.1	I	1.5	6.5
4.4.2.2	S-3	4.0 (1 class)	

4.4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing, and marking complies with the section 5 requirements. Defects shall be scored in accordance with table VIII. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be closed. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

TABLE VIII. Classification of preparation for delivery defects

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Materials	Any component missing or not as specified. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling, bulging or distortion of the containers. Polyethylene bags heat sealed seams open, noncontinuous or crooked; vent hole missing or greater than 1/4 inch diameter. Incorrectly fabricated bag.
Content	Number of polyethylene bagged packages per shipping container is more or less than specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.2).

5.1.1 Level A. Each pair of sweat pants shall be neatly folded to an approximate dimension of 11 by 11 inches. Each pair of pants shall be individually inserted in a flat style bag made of clear polyethylene film of 0.00125-inch thickness (± 25 percent tolerance). The bag shall be formed with heat

Source: https://assist.dla.mil -- Downloaded: 202610-26T12:28Z
Check the source to verify that this is the current version before use.

sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. The bag may be fabricated from polyethylene film tubing or sheeting. The final closure of the bag shall be heat sealed with the heat seal made as close as possible to the open end. A one-quarter inch diameter hole shall be made at one corner of the polyethylene bag to allow excess air to escape. Alternatively, the final closure of the polyethylene bag may be accomplished by means of a tuck or reverse flap.

5.1.2 Level B (civil agencies). Sweat pants shall be packaged in accordance with 5.1.1 (see 6.2).

5.1.3 Level C. Sweat pants shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Sixty sweat pants of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A packages shall be packed flat two in length, two in width and fifteen in depth within a shipping container. Inside dimensions of each container shall approximate 22-1/2 inches in length, 22-1/2 inches in width and 18-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one class only, may be packed within the same container.

5.2.2 Level B. Sixty sweat pants of one size and class only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a taped box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A packages shall be packed flat two in length, two in width and fifteen in depth within a shipping container. Inside dimensions of each container shall approximate 22-1/2 inches in length, 22-1/2 inches in width and 18-3/4 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes of one class only, may be packed within the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with the appendix of the box specification.

5.2.3 Level C. Sweat pants packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest rate of transportation for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with FED-STD-123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

5.3.2.1 Labels, mixed sizes. Each shipping container packed with mixed sizes shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5- by 4-inches with the words "MIXED SIZES", plainly stamped or printed thereon and under these words shall be legibly stamped or printed the correct quantity and sizes contained therein.

5.3.2.2 Polyethylene bagged packages. Polyethylene bagged packages shall have the required identification information legibly printed or stamped in black directly on the bag across the center face or on a white paper label inserted within the bag so as to permit ready identification.

6. NOTES

6.1 Intended use. The sweat pants covered by this specification are intended for use by personnel of Government agencies.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number, and date of this specification.
(b) Class and size required (see 1.2.1).
(c) First article. When first article sample is required (see 3.1, 4.3 and 6.4).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level B packaging is required for civil agencies (see 5.1.2).
(f) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

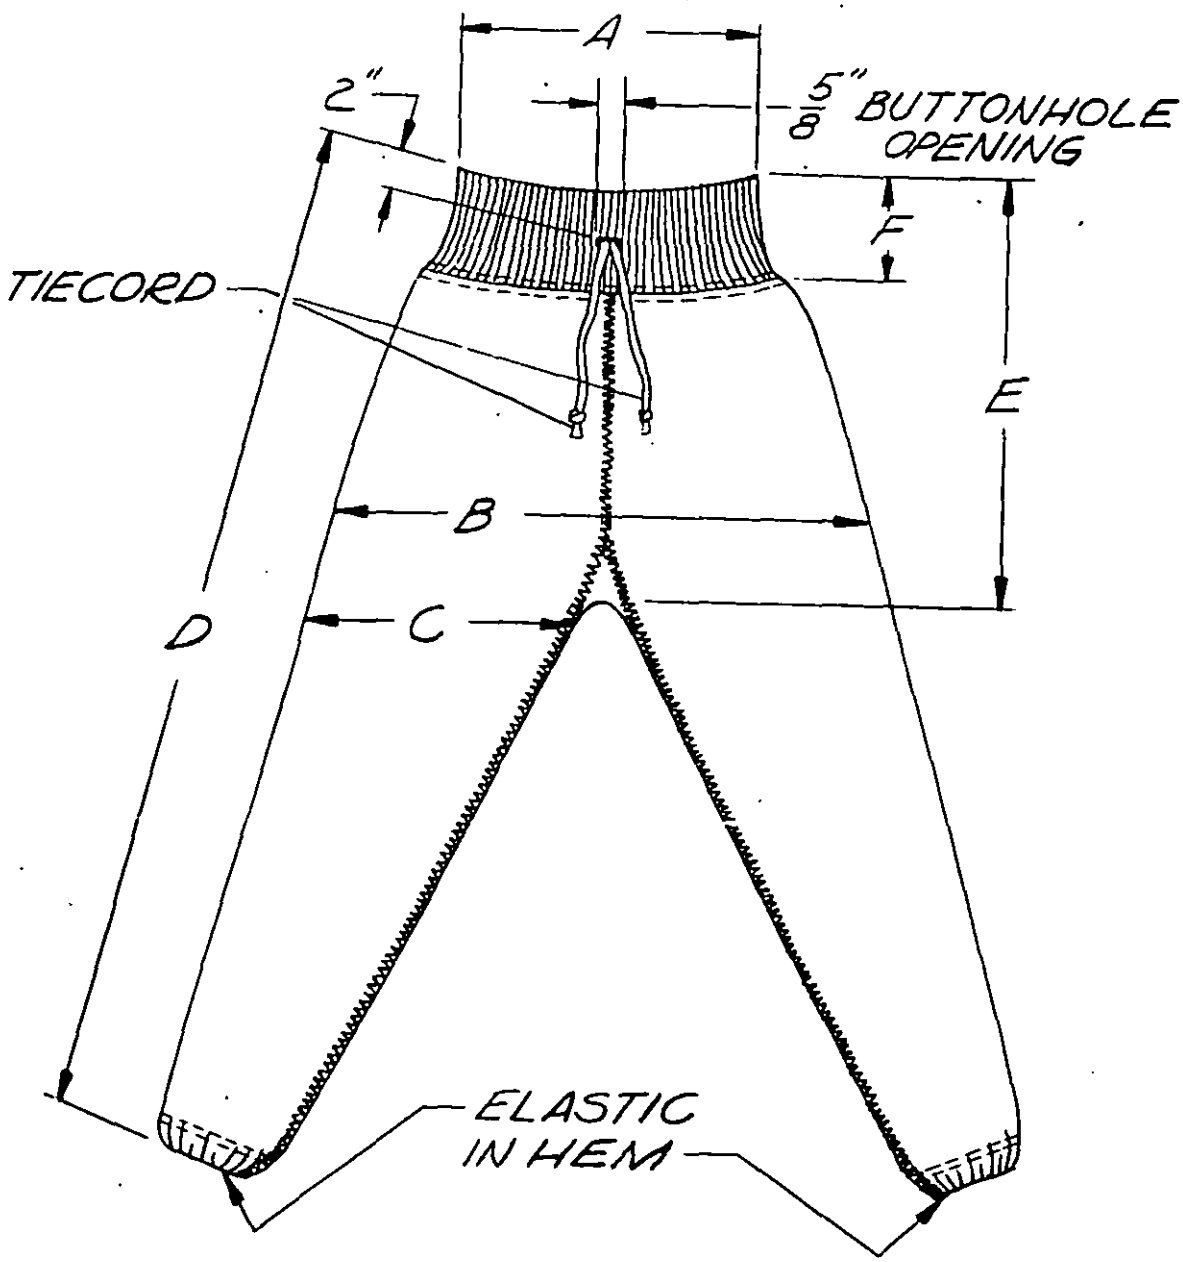


FIGURE-I SWEAT PANTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

6.3 Sample. For access to samples, address the procuring office issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample. The first article should consist of one pair of finished sweat pants. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

Custodians:

Army - GL
Navy - SA
Air Force - 82

Review activity:

Army - MD

User activity:

Navy - MC

Preparing activity:

Army - GL

Civil Coordinating Activity:

JUS-FPI
GSA-FSS

Project No. 8415-0834

☆ U. S. GOVERNMENT PRINTING OFFICE : 1973 O - 544-603/1343

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 20 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK LABORATORIES
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

STSNLT-EOS

Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

SWEAT PANTS BBB-S-1269B

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-26T12:28Z
Check the source to verify that this is the current version before use.