CCC-P-86
MARCH 18, 1937

FEDERAL STANDARD STOCK CATALOG

Section IV

(Part 5)

FEDERAL SPECIFICATION

FOR

PADDING; LAUNDRY

(STITCHED-COTTON-ROVING)

This specification was approved by the Director of Procurement, for the use of all departments and establishments of the Government, and shall become effective not later than November 1, 1937. It may be put into effect, however, at any earlier date after promulgation.

A. APPLICABLE FEDERAL SPECIFICATIONS.

A–1. The following Federal specification, of the issue in effect on date of invitation for bids, shall form a part of this specification:

CCC–T–191—Textiles: Test Methods.

A–2. Any special requirements of the individual departments of the Government are noted under section H.

B. TYPES AND GRADE.

B–1. The types shall be as follows:

Type A, commercially known as one-quarter inch thick
Type B, commercially known as five-eighths inch thick.

B–2. *Grade.*—Padding, laundry, shall be of but one grade, i. e., that known as "firsts."

C. MATERIAL AND WORKMANSHIP.

C–1. *Material.*—Padding, shall be made from cotton, free from dirt and impurities.

C–2. *Workmanship.*—Shall be free from avoidable imperfections in manufacture and from defects or blemishes affecting the appearance or serviceability of the product.

D. GENERAL REQUIREMENTS.

D–1. The construction of this fabric shall provide for sufficient firmness and resiliency to withstand the constant pressure, heat, and moisture conditions necessary to laundry purposes.

D–2. *Construction.*—This material resembles a woven fabric and is made from cotton roving which takes the place of the filling, while

Source: https://assist.dla.mil -- Down
Check the source to verify that this is t

the warp of the woven fabric is substituted in this instance by a series of spaced cotton thread stitches in row formation running the length of the fabric, each set of stitches binding individual strands of roving in successive order, forming a satisfactory padding (see sketch).

D–3. *Stitch.*—Chain, single or double thread, multiple needle.

D–4. *Stitch-Row-Spacing.*—4 to the inch. Tolerance, 1 in 2 inches.

D–5. *Thread, Stitching.*—12/2 white. Twist per inch, ply 11; tolerance, plus or minus 1.

E. DETAIL REQUIREMENTS.

E–1. The detail requirements shall be as shown in table I.

TABLE I

Type	Width	Weight per square yard	Thickness	Length of roll
	Inches		*Inch*	*Yards*
A	54	1 pound	¼	20
B	74	2 pounds 8 ounces	⅝	50–55

E–2. The thickness requirements are arbitrary trade designations and material shall not be rejected for lack of thickness if the weight requirement is met.

F. METHODS OF SAMPLING, INSPECTION, AND TESTS.

F–1. Any requirements applicable to the individual departments are noted under section H.

F–2. *Sampling.*—Not less than one sample, at least 1 yard full width, shall be taken at random from each 1,000 yards or fraction thereof, except when the shipment is over 10,000 yards, in which case a sample shall be taken from each one-tenth of the shipment.

F–3. *Tests.*—Shall be conducted in conformity with Federal Specification CCC–T–191—Textiles; Test-Methods, of the issue in effect on date of invitation for bids.

F–4. Samples from previous satisfactory purchases may be used to assist the inspector in determining conformity to the requirements of this specification.

F–5. Fabric should have a full, firm body, that is strongly bound together in which the individual strands are properly twisted to insure a proper amount of resistance. Fluffy padding, though it may appear larger to the eye, will, when squeezed through two fingers, be found lacking in this quality.

G. PACKAGING, PACKING, AND MARKING.

G–1. Any special requirements of the individual departments are noted under section H.

G–2. *Packing.*—Unless otherwise specified, the subject commodity shall be delivered in standard commercial containers, so constructed

Source: https://assist.dla.mil --
Check the source to verify that th

as to insure acceptance by common or other carriers, for safe transportation, at the lowest rate, to the point of delivery.

G–3. *Marking.*—Unless otherwise specified, shipping containers shall be marked with the name of the material, the size, and the quantity contained therein, as defined by the contract or order under which the shipment is made, the name of the contractor, and the number of the contract or order.

H. REQUIREMENTS APPLICABLE TO INDIVIDUAL DEPARTMENTS.

H–1. The following departmental specifications of the issue in effect on date of invitation for bids shall form a part of this specification:

H–1a. *Army.*—U. S. Army Specification No. 100–2, Standard Specification for Marking Shipments.

H–1a (1). The following shall apply to purchases by the Army:

H–1a (1) a. *Packing.*—Unless otherwise specified, the padding shall be delivered in burlap bales.

H–1a (1) b. *Marking.*—Each bale shall be stenciled in letters not less than one-half inch high as follows:

_____yards.
Padding, Laundry (Stitched-Cotton-Roving) ⅝ x 74-inches
Req. Q. M._____(No.)
P. O. No._____
Contractor_____

H–2. *Navy.*—Navy Department General Specifications for Inspection of Material, copies of which may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington, D. C.

H–2a. *Packing.*—Unless otherwise specified, the subject commodity shall be delivered in burlap-covered bales. The burlap used to cover the bales shall be of sufficient weight, clean, and of good quality.

I. NOTES.

I–1. *Use.*—This padding is designed primarily for laundry purposes, to be used on flatwork ironers and press machines.

I–2. It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

I–3. An index of Federal specifications may be obtained upon application, as noted in paragraph next below. Price 10 cents.

I–4. Copies of this specification, and of F. S. CCC–T–191, may be obtained upon application, accompanied by money order, or coupon,

Source: https://assist.dla.mil -- Downl
Check the source to verify that this is t

or cash, to the Superintendent of Documents, Government Printing, Office, Washington, D. C. Price 5 cents each.

Notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

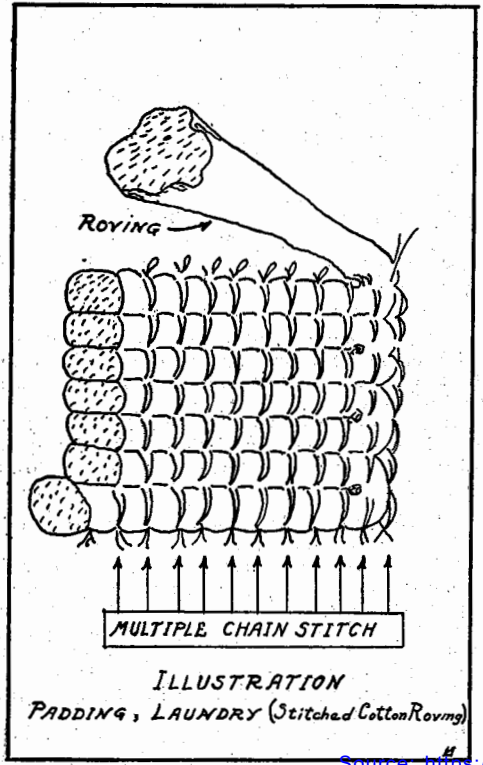


ILLUSTRATION
PADDING, LAUNDRY (Stitched Cotton Roving)

Source: https://assist.dla.mil -- Do
Check the source to verify that this i