CCC-P-86a
28 JULY 1949
SUPERSEDING
Fed. Spec. CCC-P-86
March 18, 1937

FEDERAL SPECIFICATION

PADDING, LAUNDRY (STITCHED-COTTON-ROVING)

This specification was approved by the Director, Bureau of Federal Supply, for the use of all departments and establishments of the Government.

1. CLASSIFICATION

1.1 Types.—Laundry padding covered by this specification shall be of the following types, as specified (see table I):

Type I.—¼ inch thickness (commercial designation).
Type II.—⅝ inch thickness (commercial designation).

1.2 Grade.—The grade shall be that known commercially as firsts.

2. APPLICABLE SPECIFICATIONS

2.1 The following Federal Specifications, of the issues in effect on date of invitation for bids, form a part of this specification:

V–T–276—Thread; Cotton.
CCC–T–191—Textiles; General Specification, Test Methods.

(Copies of Federal specifications and the Federal Specifications Index may be obtained upon application, accompanied by postal note, money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Prices may be obtained from the Superintendent of Documents.)

2.2 Specifications and other publications applicable only to individual departments are listed in section 7.

3. REQUIREMENTS

3.1 Material.—The padding shall be of undyed cotton, processed into roving, of a grade suitable for the purpose intended.

3.1.1 *Roving.*—The roving shall have sufficient twist and be of the proper size to insure that the padding will conform to the specified weight requirements and to provide the necessary firmness and resiliency required for laundry purposes.

3.1.2 *Thread.*—The thread used in joining the roving shall be 2-cord, ticket No. 20, type IA1, in accordance with Federal Specification V–T–276.

3.2 Construction.—The padding shall be constructed of cotton roving joined together by means of stitching to simulate a woven

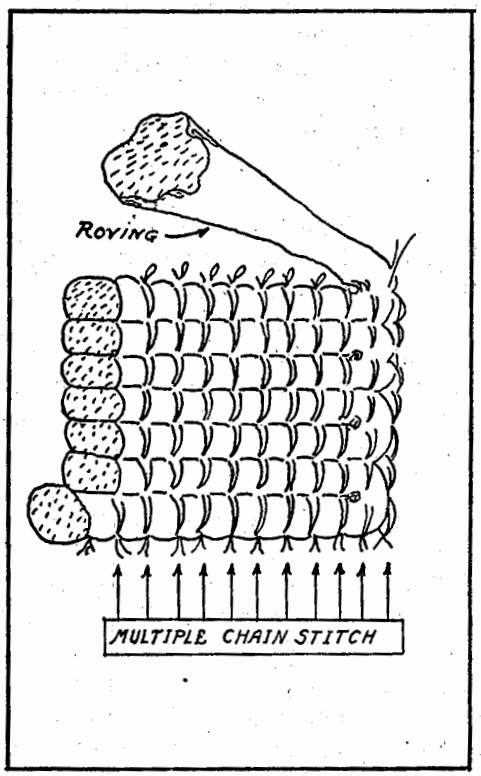


Figure 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

construction, the roving running fillingwise and the stitching running warpwise in row formation binding each strand of roving in successive order (see fig. 1). The concatenation of the thread shall be between the strands of roving. There shall be four strands of roving and four rows of stitching per inch. A tolerance of plus or minus one strand and/or one row of stitching will be permitted.

3.3 Physical requirements.—The padding shall conform to the requirements shown in table I.

TABLE I.—*Physical requirements.*

Type	Weight per square yard, minimum	Width, minimum	Length of roll
	Pounds	*Inches*	*Yards*
I	1	54 or 90	45 to 55
II	2 or 2½	74	Do.

3.4 Workmanship.—The padding shall be clean, evenly stitched, and free from defects which affect its appearance or which may impair its serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Sampling.—At least one sample not less than 2 yards long and the full width of the padding, shall be taken at random by the purchaser, for tests from each 1,000 yards or fraction thereof offered for delivery, except that when the shipment is over 10,000 yards one sample shall be taken from each one-tenth of the shipment.

4.2 Inspection.—Inspection shall be made at the point of delivery or at the factory, at the discretion of the purchasing agent.

4.3 Test procedures.—Tests shall be conducted in accordance with the applicable methods described in Federal Specification CCC–T–191.

5. PREPARATION FOR DELIVERY

5.1 Packaging. — Unless otherwise specified, commercial packages will be acceptable.

5.2 Packing.—The padding shall be prepared for shipment to permit acceptance by carrier for transportation at the lowest applicable rate, and to afford maximum protection from normal hazards of transportation.

5.3 Marking.—Unless otherwise specified, shipping containers shall be marked with the name and type of the material as defined by the contract or order under which the shipment is made, the quantity contained therein, the name of the contractor, and the number of the contract or order.

6. NOTES

6.1 Intended use.—The padding covered by this specification is intended primarily for use on flatwork ironers and pressing machines.

6.2 Ordering data. — Purchasers should specify the type, weight (for type II), and width (for type I) of padding required, the place of inspection, and should exercise any desired options offered herein. (See 1.1, 4.2, 5.1, and 5.3.)

Patent notice.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

use, or sell any patented invention that may in any way be related thereto.

7. DEPARTMENTAL REQUIREMENTS

7.1 The following departmental specifications and other publications, of the issues in effect on date of invitation for bids, and special requirements, form a part of this specification for purchases made under this specification by the respective departments.

7.2 Army, Navy, and Air Force.

7.2.1 *Applicable specifications and other publications.*—

National Military Establishment Specification:

JAN–P–125—Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible.

U. S. Army Specification:

100–1—Baling of Clothing and Equipage.

Navy Department Specification:

General Specifications for Inspection of Material.[1]

Bureau of Supplies and Accounts Publication:

Navy Shipment Marking Handbook.[1]

Air Force Specification:

94–40645—Marking; Exterior, Domestic and Export Shipment, by Contractors.[2]

(Copies of specifications required for Air Force purchases may be obtained from the Commanding General, Air Matériel Command, Wright-Patterson Air Force Base, Dayton, Ohio.

(Copies of specifications required for Army purchases may be obtained upon application to the procuring agency. Both the title and identifying symbol or number should be stipulated when requesting copies.

(Copies of Federal and National Military Establishment specifications required for Navy purchases, Navy Department specifications, and the Navy Shipment Marking Handbook may be obtained without cost upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Supply Officer in Command, Naval Supply Center, Norfolk 11, Va. Both the title and identifying symbol or number should be stipulated when requesting copies of specifications.)

7.2.2 *Packaging.* — The laundry padding shall be tightly rolled and securely fastened to prevent unrolling. Each roll shall be completely enclosed in a wrap of kraft paper having a minimum basis weight of 50 pounds per ream (24 x 36-500). For overseas shipment, each roll shall be enclosed in an additional wrap of type B–2, asphalt duplexed waterproof barrier-material made in conformance with the requirements of NME Specification JAN–P–125.

7.2.3 *Packing.*—Each roll as specified in 7.2.2 shall be inserted into a bias-sewn tubing of burlap, pre-sewn at one end and closed either by applying wire ties or sewing. The material and closure shall conform to the requirements outlined for baling of clothing and equipage in U. S. Army Specification 100–1. Compression, baling boards, and strapping need not be used.

7.2.4 *Marking.*

7.2.4.1 *Army.*—Each roll of laundry padding shall conform to the requirements outlined in paragraph E–4 of U. S. Army Specification 100–1.

7.2.4.2 *Navy.*—In addition to any special marking required by the contract or order, marking of interior packages and shipping containers shall be in accordance with the requirements of the Navy Shipment Marking Handbook.

[1] Applicable only to Navy purchases.

[2] Applicable only to Air Force purchases.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

7.2.4.3 *Air Force.*—Each roll of laundry padding shall conform to the requirements outlined in paragraph E–4 of U. S. Army Specification 100–1, and in addition, shipments for the Air Force shall be marked in accordance with U. S. Army Specification 94–40645.

NAVY: S

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.