January 8, 1963

SUPERSEDING
Int. Fed. Spec. CCC-P-0086b(Army-QMC)
March 2, 1962 and
Fed. Spec. CCC-P-86a
July 28, 1949

FEDERAL SPECIFICATION

PADDING, COTTON, STITCHED ROVING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers laundry machine padding made of stitched cotton roving.

1.2 Classification.

1.2.1 *Types.* The padding shall be of the following types as specified (see 6.2).

Type I.—1/4-inch thickness (commercial designation).
Type II.—5/8-inch thickness (commercial designation).

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276—Thread, Cotton.
UU-P-268—Paper, Kraft, Untreated, Wrapping.
UU-P-271—Paper, Wrapping, Waterproofed Kraft.
UU-T-111—Tape; Paper Gummed (Sealing and Securing).
CCC-C-429—Cloth, Cotton, Osnaburg.
CCC-C-467—Cloth, Jute (or Kenaf), Burlap.
CCC-T-191—Textile Test Methods.
PPP-P-51—Packaging, Packing, and Marking of Textile Fabrics (Woolens Worsteds, Cottons, Silks, and Synthetics).

Federal Standards:

Fed. Std. No. 102—Preservation, Packaging, and Packing Levels.
Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751—Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

FSC 8320

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

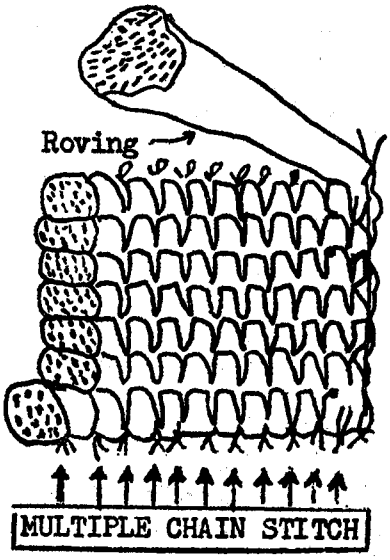


Figure 1.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following publication forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply:

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Copies may be obtained without charge from the Federal Trade Commission, Washington 25, D. C.)

3. REQUIREMENTS

3.1 Material.

3.1.1 *Roving.* The roving shall be made of clean white cotton, which has been carded and drawn.

3.1.2 *Thread.* The thread used in joining the roving shall be natural color, ticket No. 60, 2 ply, type IA1, in accordance with V-T-276.

3.2 Construction. The padding shall be constructed of cotton roving joined together by means of stitching to simulate a woven construction, the roving running fillingwise and the stitching running warpwise in row formation binding each strand of roving in successive order (fig. 1). Stitch type 101 or 401 as specified in Fed. Std. No. 751 shall be used for stitching. The concatenation of the thread shall be between the strands of roving. There shall be four strands of roving and four rows of stitching per inch. Tolerance limits will be permitted as follows:— Plus or minus

(1) One strand of roving.

(2) One row of stitching.

(3) One strand of roving and one row of stitching.

3.3 Physical requirements. The padding shall conform to the requirements specified in table I when tested as specified in 4.4.

TABLE I.—*Physical requirements*

Type	Thickness (Commercial designation)	Weight per square yard (minimum)	Width (minimum)
	Inches	*Pounds*	*Inches*
I	1/4	1.0	54 or 90
II	5/8	2.0 to 2.5	74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.4 Put-up. Unless otherwise specified, the cloth shall be in one continuous piece, 45 to 55 yards in length, and shall be put up in rolls.

3.5 Identification. Each roll of cloth shall be marked for identification in accordance with PPP-P-51.

3.6 Fiber identification. Each roll shall be labeled, ticketed, or invoiced for fiber content in accordance with the Rules and Regulations Under the Texile Fiber Products Identification Act (2.2).

3.7 Workmanship. The padding shall conform to the quality and grade of product established by this specification, and the occurrence of defects shall not exceed the applicable acceptable quality levels.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Contractor's inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Inspection for acceptance. Unless otherwise indicated, inspection shall be in accordance with MIL-STD-105. Defects found during this examination shall be classified in accordance with 4.2.2, 4.2.2.1, and 4.2.2.2.

TABLE II.—*Defects*

Examine	Defect	Classification	
		Major	Minor
Padding	Material not as specified	X	
	Thin or weak place		X
	Cotton not natural color		X
	Spotted, stained, discolored, or soiled		X
	Cut, tear, or hole	X	
Construction	Less than 3 strands of roving per inch	X	
	More than 5 strands of roving per inch		X
	Less than 3 rows of stitching per inch	X	
	More than 5 rows of stitching per inch		X
	Wrong stitch type	X	
	One row of stitching missing one foot and over in length	X	
	One row of stitching missing under one foot in length		X
	Two or more contiguous rows of stitching missing (regardless of length)	X	
	Stitching does not run lengthwise in row formation		X
	Three or more strands of roving not bound in successive order as required	X	
	Two strands of roving not bound as required		X
	Concatenation of the thread not between the strands of roving		X
	Not evenly stitched		X
	Loose tension resulting in loosely attached rows of roving		X
	Broken stitches		X
Fiber content label	Missing, illegible, or wrong legend		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.2.1 *Inspection of components.* Quality assurance provisions for components described, shall be in accordance with subsidiary specifications, except that this specification shall govern in the event of conflict.

4.2.2 *End item examination.* The defects found during the examination shall be classified in accordance with table II. The defects shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition, in which case only the more serious defect shall be counted. The sample unit for this examination shall be one linear yard. The lot size shall be expressed in units of one linear yard. The inspection level shall be I and the acceptable quality level (AQL) for this examination shall be 4.0 major defects and 10.0 total defects per 100 units. The number of sample rolls over which the sample yardage shall be distributed shall be in accordance with table III. An approximately equal number of yards shall be examined from each roll in the sample.

4.2.2.1 *Overall examination.* Each defect listed below shall be counted not more than once in each roll. The sample unit shall be one completely fabricated roll of padding. The sample size (number of rolls selected as sample) for this examination and the acceptance number (number of defects acceptable) shall be as shown in table III.

Defects

Appreciable amount of burrs, shives, or other foreign matter.

Width less than specified minimum.

Objectionable odor.

Identification tag—Missing; wrong type; not attached as specified; marking missing, incorrect, or illegible; text incomplete.

4.2.2.2 *Examination for length.*

4.2.2.2.1 *Individual rolls.* The roll shall be considered defective with regard to length requirements if its actual gross length is less than 45 yards or more than 55 yards, or more than 2 yards shorter than the gross length marked on the roll ticket, or not in one continuous piece. The sample size (number of rolls selected for sample) and acceptance number (maximum number of defects acceptable) shall be as shown in table III. The sample unit shall be one roll.

4.2.2.2.2 *Total yardage in sample.* The lot shall be unacceptable if the total of the actual gross length of rolls in the sample is less than the total of the gross lengths marked on roll tickets.

TABLE III.—*Sampling table*

Lot size in yards	Sample size in rolls	Acceptance number
Up to 1,300[1]	3	0
1,301 to 3,200	5	0
3,201 to 8,000	7	0
8,001 to 22,000	10	0
22,001 to 110,000	15	1
110,001 to 550,000	25	1
550,001 and over	50	2

[1] If lot contains fewer than three rolls, each roll in the lot shall be examined.

4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one completely packed roll, fully prepared for delivery. The lot size shall be the number of completely packed rolls in the end item inspection lot. The inspection level shall be L-4 and the AQL shall be 4.0 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Examine	*Defect*
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Packaging and Packing	Not packaged as specified. Closure of cloth covered bundles incorrect. Any component missing or damaged. Insecurely sewn bundles.

4.4 Test methods. The methods of testing specified in CCC-T-191, wherever applicable, and as listed in table IV shall be followed. The physical values specified in section 3 apply to the average of the determinations made on the sample unit for test purposes as specified in the applicable test methods. The sample unit for testing shall be one linear yard of the completely fabricated laundry padding. The sample size (number of sample units) shall be as shown in table below. The lot size shall be expressed in units of 1 linear yard. The lot shall be unacceptable if one or more sample units fail to meet any requirements specified.

Lot size (yards)	*Sample size*
800 or less	2
801 to 22,000	3
22,001 and over	5

TABLE IV.—*Tests*

Characteristic	Requirement reference	Test method
Padding		
Weight (oz/sq. yd.)	Table I	5041
Thickness	Table I	commercial designation
Width	Table I	5020

5. PREPARATION FOR DELIVERY

(Fed. Std. No. 102 shall be referred to for definitions and applications of the various levels of packaging and packing protection for civil agency procurements).

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 *Level A.* Padding shall be tightly rolled and securely tied at each end and at the center with cotton tape or twine. Each roll shall be completely inclosed in a double wrap of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with 3-inch minimum width gummed paper tape conforming to class 3 of UU-T-111.

5.1.2 *Level C.* Padding shall be packaged in accordance with the industry's practice.

5.2 Packing. Packing shall be level A, B, or C as specified (6.2).

5.2.1 *Level A.* Padding, packaged as specified in 5.1, shall be completely over-wrapped with waterproofed kraft paper conforming to class B-2 of UU-P-271. All joints, seams, and closures shall be effectively sealed so as to provide water resistance equal to that provided by the barrier material. Each roll shall be inserted in a bias-sewn tubing made from cotton osnaburg conforming to type I, class 2, finish A of CCC-C-429, or burlap cloth conforming to class 1 of CCC-C-467, and sewn in the prescribed manner. The seams shall be type SSa-1 or LSa-1 and with stitch type 401 conforming to Fed. Std. No. 751. The thread for seaming the tubing shall be cotton thread conforming to type IA1 of V-T-276. Ticket No. 12, 4-ply shall be used as the needle thread. Ticket No. 16, 4-ply shall be used as the looper thread. Stitching shall be spaced to average three to six stitches per inch. The sewing lines shall be not less than 3/8 inch nor more than 3/4 inch from the edge of the cloth. The degree of the bias sewn tubing

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

shall be not less than 40 or more than 50 degrees and the angle used within this range shall remain constant throughout the sewing operation. The tubing shall be closed at each end with two wire ties. Five inches of surplus covering shall be gathered together with the first wire tie applied as close to the base of the roll as possible. The second wire tie shall be applied approximately one inch from the first wire tie, with the twisted ends positioned opposite to the ends of the first wire tie. The wire ties shall be not less than 6 inches long, 0.072-inch thick soft iron or steel with a 1/2-inch diameter formed eye at each end. Alternatively, the cotton osnaburg or burlap tubing specified herein may be in bag form, presewn one end and the closure effected by wire-tying the open end with two wire ties as specified above.

5.2.2 *Level B.* Padding, packaged as specified in 5.1, shall be inserted in bias-sewn tubing made from cotton osnaburg conforming to type I, class 2, finish A, of CCC-C-429, or burlap cloth conforming to class 1 of CCC-C-467, and sewn in the prescribed manner. The seams shall be type SSa-1 or LSa-1 and with stitch type 401 conforming to Federal Standard No. 751. The thread for seaming the tubing shall be cotton thread conforming to type IA1 of V-T-276. Ticket No. 12, 4-ply shall be used as the needle thread. Ticket No. 16, 4-ply shall be used as the looper thread. Stitching shall be spaced to average 3 to 6 stitches per inch. The sewing lines shall be not less than 3/8 inch nor more than 3/4 inch from the edge of the cloth. The degree of the bias-sewn tubing shall be not less than 40 or more than 50 degrees and the angle used within this range shall remain constant throughout the sewing operation. The tubing shall be closed at each end with two wire ties. Five inches of surplus covering shall be gathered together with the first wire tie applied as close to the base of the roll as possible. The second wire tie shall be applied approximately one inch from the first wire tie, with the twisted ends positioned opposite to the ends of the first wire tie. The wire ties shall be not less than 6 inches long, 0.072-inch soft iron or steel with a 1/2-inch diameter formed eye at each end. Alternatively, the cotton osnaburg or burlap tubing specified herein may be in bag form, presewn one end and the closure effected by wire-tying the open end with two wire ties as specified above.

5.2.3 *Level C.* Padding packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 *Civil agencies.* In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Fed. Std. No. 123.

5.3.2 *Military requirements.* In addition to any special marking required by the contract or order, shipments shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The padding covered by this specification is intended primarily for use on flatwork ironers and pressing machines.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type required (1.2).
(*c*) Width required (3.3).
(*d*) Weight required (3.3).
(*e*) Selection of applicable levels of packaging and packing (5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

6.2.1 *For civil agencies.* Level A packaging and Level B packing shall be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouse from which partial shipments will be made to ultimate consumers.

6.3 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Padding, laundry, cotton, stitched.
Carload minimum weight—any quantity.

Motor:

Padding, cotton, not otherwise indexed, stitched.

Truckload minimum weight 20,000 pounds, subject to Rule 115, National Motor Freight Classification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—Q

Navy—S

Air Force—MAA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.