CCC-P-86d
May 25, 1967
SUPERSEDING
Fed. Spec. CCC-P-86c
January 8, 1963

FEDERAL SPECIFICATION

PADDING, COTTON, STITCHED ROVING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers laundry machine padding made of stitched roving.

1.2 Classification. The padding shall be of the following types (see 6.3):

Type I - Deleted.
Type II - 5/8-inch thickness (commercial designation).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

V-T-276 - Thread, Cotton.
UU-P-268 - Paper, Kraft, Untreated, Wrapping.
PPP-B-1055 - Barrier Material, Waterproofed, Flexible.
CCC-C-429 - Cloth, Osnaburg, Cotton.
CCC-C-467 - Cloth, Burlap, Jute (or Kenaf).
CCC-T-191 - Textile Test Methods.
PPP-P-1134 - Packaging and Packing of Cotton and Cotton-Synthetic Fiber Blend Fabrics (Excluding Duck Fabrics).
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-T-40625 - Tubing, Bias Sewn (Burlap or Osnaburg), Cloth.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Rules and Regulations Under the Textile Fiber Products Identification Act.

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D. C., 20580.)

3. REQUIREMENTS

3.1 Material.

3.1.1 Roving. The roving shall be made of clean white cotton, which has been carded and drawn.

3.1.2 Thread. The thread used in joining the roving shall be natural color, ticket No. 60, 2 ply, type IA1, in accordance with V-T-276.

3.2 Construction. The padding shall be constructed of cotton roving joined together by means of stitching to simulate a woven construction, the roving running filling wise and the stitching running warpwise in row formation binding each strand of roving in successive order (see fig. 1). There shall be four strands of roving and four rows of stitching per inch. Tolerance limits will be permitted as follows:

Plus or minus:

(1) One strand of roving.
(2) One row of stitching.

3.3 Physical requirements. The padding shall conform to the requirements specified in table I, when tested as specified in 4.4.

TABLE I. Physical requirements

Type	Thickness (nominal)	Weight per square yard (minimum)	Width (minimum)
	Inch	Pounds	Inches
II	5/8	2.0	74

3.4 Length and put-up. Unless otherwise specified (see 6.2), the cloth shall be in one continuous piece, 45 to 55 yards in length, and shall be put-up in rolls.

3.5 Identification. Each roll of cloth shall be marked for identification in accordance with PPP-P-1134.

3.6 Fiber identification. Each roll shall be labeled, ticketed, or invoiced for fiber content in accordance with the Textile Fiber Products Identification Act.

3.7 Workmanship. The padding shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQLs).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.2 Inspection. Inspection shall be in accordance with the provisions of MIL-STD-105, except where otherwise indicated.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable procurement documents.

4.2.2 Examination of the end item. Examination of the end item shall be in accordance with the provisions of 4.2.2.1 through 4.2.2.3.2.

4.2.2.1 End item examination. The defects found during the examination shall be classified in accordance with table II. The defects shall be counted regardless of their proximity to each other, except where two or more defects represent a single local condition, in which case only the more serious defect shall be counted. The sample unit for this examination shall be one linear yard. The lot size shall be expressed in units of one linear yard. The inspection level shall be one, and the AQL for this examination shall be 4.0 major defects and 10.0 total defects per 100 units. The number of sample rolls over which the sample yardage shall be distributed shall be in accordance with table III. An approximately equal number of yards shall be examined from each roll in the sample.

TABLE II. Classification of defects

Examine	Defect	Classification	
		Major	Minor
Padding	Material not as specified	X	
	Thin or weak place		X
	Cotton not natural color		X
	Spotted, stained, discolored, or soiled		X
	Cut, tear, or hole	X	
Construction	Less than 3 strands of roving per inch	X	
	More that 5 strands of roving per inch		X
	Less than 3 rows of stitching per inch	X	
	More than 5 rows of stitching per inch		X
	One row of stitching missing one foot and over in length	X	
	One row of stitching missing under one foot in length		X
	Two or more contiguous rows of stitching missing (regardless of length)	X	
	Stitching does not run lengthwise in row formation		X
	Three or more strands of roving not bound in successive order as required	X	
	Two strands of roving not bound as required		X
	Not evenly stitched		X
	Loose tension resulting in loosely attached rows of roving		X
	Broken stitches		X
Fiber content label	Missing, illegible, or wrong legend		X

4.2.2.2 Overall examination. Each defect listed below shall be counted not more than once in each roll. The sample unit shall be one completely fabricated roll of padding. The sample size (number of rolls selected as sample) for this examination and the acceptance number (number of defects acceptable) shall be as shown in table III.

Defects
Excessive amount of burrs, shives, or other foreign matter.
Width less than minimum specified.
Objectionable odor.
Identification tag - missing; wrong type; not attached as specified; marking missing, incorrect, or illegible; text incomplete.
Fiber identification not labeled in accordance with Textile Fiber Products Identification Act.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.2.2.3 Examination for length.

4.2.2.3.1 Individual rolls. The roll shall be considered defective with regard to length requirements if its actual gross length is less than 45 or more than 55 yards, or more than 2 yards shorter than the gross length marked on the roll ticket, or not in one continuous piece. The sample size (number of rolls selected for sample) and acceptance number (maximum number of defects acceptable) shall be as shown in table III. The sample unit shall be one roll.

4.2.2.3.2 Total yardage in sample. The lot shall be unacceptable if the total of the actual gross length of rolls in the sample is less than the total of the gross lengths marked on roll tickets.

TABLE III. Sampling table

Lot size in yards	Sample size in rolls	Acceptance number
Up to 1200 1/	3	0
1201 up to and including 3200	5	0
3201 up to and including 10,000	8	0
10,001 up to and including 35,000	13	0
35,001 up to and including 150,000	20	1
150,001 and over	32	2

1/ If lot contains fewer than three rolls, each roll in the lot shall be examined.

4.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping roll fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping rolls fully prepared for delivery. The lot size shall be the number of shipping rolls in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Packaging and packing	Not packaged as specified. Closure of cloth covered bundles incorrect.
	Any component missing or damaged.
	Insecurely sewn bundles.

4.4 Test methods. The methods of testing specified in CCC-T-191, wherever applicable, and as listed in table IV shall be followed. The physical values specified in section 3 apply to the average of the determinations made on the sample unit for test purposes, as specified in the applicable test methods. The sample unit for testing shall be one linear yard of the completely fabricated laundry padding. The sample size (number of sample units) shall be as shown in the table below. The lot size shall be expressed in units of 1 linear yard. The lot shall be unacceptable if one or more sample units fail to meet any requirements specified. All test reports shall contain the individual values utilized in expressing the final result.

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

TABLE IV. Test methods

Characteristic	Requirement paragraph	Test method
Padding		
Cottom identification	3.1.1	1200 1/
Weight per square yard	3.3	5041
Thickness	3.3	Commercial 1/

1/ A certificate of compliance is required and will be acceptable for the requirements specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A. Padding shall be tightly rolled and securely tied at each end and at the center with cotton tape or twine. Each roll shall be completely inclosed in a double wrap of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with 3-inch minimum width gummed paper tape conforming to type III, grade C of PPP-T-45.

5.1.2 Level C. Padding shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Padding, packaged as specified in 5.1, shall be completely overwrapped in waterproofed kraft paper conforming to class B-2 of PPP-B-1055. All seams and joints of the overwrap shall be sealed with waterproof pressure sensitive tape. The waterproofed rolls of padding shall be packed in bias sewn tubing or a bag (presewn one end) made from cotton osnaburg cloth conforming to class 2 of CCC-C-429, or jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467. The bias-sewn tubing specified shall conform to MIL-T-40625. Tubing or bag packs shall have the open ends closed with two double-looped wire ties. The wire ties shall be not less than 6 inches long, 0.072-inch thick galvanized soft iron or steel wire, with a 1/2-inch diameter formed eye at each end. At least 5 inches of surplus cloth measured from the center of the pack shall be gathered evenly together to form an ear. The first wire tie shall be applied as close to the contents as possible so there will be a minimum of slack in the tube. The second wire tie shall be applied at a distance approximately 1 inch from the first wire ties. The twisted ends of the wire ties shall alternate and face in the opposite directions.

5.2.2 Level B. Padding, packaged as specified in 5.1, shall be packed in bias sewn tubing or a bag (presewn one end) made from cotton osnaburg cloth conforming to class 2 of CCC-C-429, or jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467. The bias-sewn tubing specified shall conform to MIL-T-40625. Tubing or bag packs shall have the open ends closed with two double-looped wire ties. The wire ties shall be not less than 6 inches long, 0.072-inch thick galvanized soft iron or steel wire, with a 1/2-inch diameter formed eye at each end. At least 5 inches of surplus cloth measured from the center of the pack shall be gathered evenly together to form an ear. The first wire tie shall be applied as close to the contents as possible so there will be a minimum of slack in the tube. The second wire shall be applied at a distance approximately 1 inch from the first wire tie. The twisted ends of the wire ties shall alternate and face in opposite directions.

5.2.3 Level C. Padding, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with rules or regulations of carriers applicable to the mode of transportation.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Fed. Std. No. 123.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The padding covered by this specification is intended primarily for use on flatwork ironers and pressing machines.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Length other than that specified (see 3.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2.1 Civil agencies. Level A packaging and level B packing shall be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouses from which partial shipments will be made to ultimate consumers. When level B packaging is required for civil agency, the level A requirements in 5.1.1 shall apply.

6.3 Supersession data. The type I padding, 1/4-inch thickness (commercial designation), has been deleted.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 82

Review activities:

Army - MD
Navy - SA
Air Force - 82, 85

User activities:

Navy - MC, CG, MS

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA - FSS
HEW
VA
AMC - DP

Review and user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current Federal Supply Classification Listing of DOD Standardization Documents.

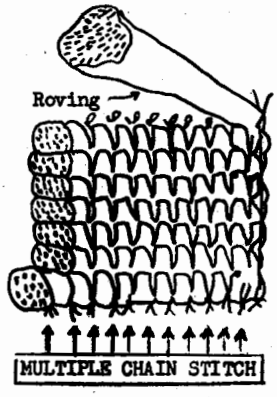


FIGURE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

"to detach this form, cut along this line"

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity.

SPECIFICATION

Padding, Cotton, Stitched Roving CCC-P-86d

ORGANIZATION	CITY AND STATE

CONTRACT NO.	QUANTITY OF ITEMS PROCURED	DOLLAR AMOUNT
		$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*	DATE

DD FORM 1 OCT 64 1426

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01762

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRE-SS
Natick, Massachusetts 01762

FOLD

"to tach this form ut along this ne"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.