CCC-P-86E
October 20, 1971
SUPERSEDING
Fed. Spec. CCC-P-86D
May 25, 1967

FEDERAL SPECIFICATION

PADDING, COTTON, STITCHED ROVING

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE

1.1 Scope. This specification covers laundry machine padding made of stitched roving.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

V-T-276	-	Thread, Cotton.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
PPP-B-1055	-	Barrier Material, Waterproofed, Flexible.
CCC-C-429	-	Cloth, Osnaburg, Cotton.
CCC-C-467	-	Cloth, Burlap, Jute (or Kenaf).
PPP-P-1134	-	Packaging and Packing of Cotton and Cotton-Synthetic Fiber Blend Fabrics (Excluding Duck Fabrics).
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 191 - Textile Test Methods.
Fed. Std. No. 751 - Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications Standards, and Handbooks, as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-T-40625 - Tubing, Bias Sewn (Burlap or Osnaburg), Cloth.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

Rules and Regulations Under the Textile Fiber Products Identification Act

(Copies may be obtained without charge from the Federal Trade Commission, Washington, D.C., 20580.)

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202, Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. Samples, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

3.2 Material.

3.2.1 Roving. The roving shall be made of cleaned, undyed cotton, (natural) which has been carded and drawn.

3.2.2 Thread. The thread used in joining the roving shall be natural color, ticket No. 60, 2 ply, type IA1, in accordance with V-T-276.

3.2.3 Construction. The padding shall be constructed of cotton roving joined together by means of stitching, using stitch type 101 of Fed. Std. No. 751 to simulate a woven construction, the roving running filling wise and the stitching running warpwise in row formation binding each strand of roving in successive order (see fig. 1). There shall be four strands of roving and four rows of stitching per inch. Tolerance limits for individual determinations will be permitted as follows:

Plus or minus:

(1) One strand of roving.
(2) One row of stitches.
(3) One stitch per inch.

3.3 Physical requirements. The padding shall conform to the requirements specified in table I, when tested as specified in 4.4.

TABLE I. Physical requirements

Thickness (nominal)	Weight per square yard (minimum)	Width (minimum)
Inch	Pounds	Inches
5/8	2.0	74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

3.4 Length and put-up. Unless otherwise specified (see 6.2), the padding shall be in one continuous piece, 45 to 55 yards in length, and shall be put-up in rolls.

3.5 Identification. Each roll of padding shall be marked for identification in accordance with PPP-P-1134.

3.6 Fiber identification. Each roll shall be labeled, ticketed, or invoiced for fiber content in accordance with the Textile Fiber Products Identification Act.

3.7 Workmanship. The padding shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents.

4.2.2 Examination of the end item. Examination of the end item shall be in accordance with the provisions of 4.2.2.1 through 4.2.2.3.2.

4.2.2.1 End item examination. The defects found during the examination shall be classified in accordance with table II. The defects shall be counted regardless of their proximity to each other, except where two or more defects

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

represent a single local condition, in which case only the more serious defect shall be counted. The sample unit for this examination shall be one linear yard. The inspection level shall be level I, and the AQL for this examination 6.5 total defects per 100 units. The number of sample rolls over which the sample yardage shall be distributed shall be in accordance with table III. An approximately equal number of yards shall be examined from each roll in the sample.

TABLE II. Classification of defects

Examine	Defect
Padding	Material not as specified Thin or weak place Cotton not natural color or not clean Any spot, stain or discoloration (that will transfer itself upon contact) Cut, tear, or hole
Construction	Strands of roving per inch not as specified One row of stitching missing one foot and over in length Stitching does not run lengthwise in parallel row formation Two strands of roving not bound as required Not evenly stitched Loose tension resulting in loosely attached rows of roving Broken stitches
Fiber content label	Missing, illegible, or wrong legend

4.2.2.2 Overall examination. Each defect listed below shall be counted not more than once in each roll. The sample unit shall be one completely fabricated roll of padding. The sample size (number of rolls selected as sample) for this examination and the acceptance number (number of defects acceptable) shall be as shown in table III.

Defects

Width less than minimum specified.
Objectionable odor.
Identification tag - missing; wrong type; not attached as specified; marking missing, incorrect, or illegible; text incomplete.
Fiber identification not labeled in accordance with Textile Fiber Products Identification Act.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.2.2.3 Examination for length.

4.2.2.3.1 Individual rolls. The roll shall be considered defective with regard to length requirements if its actual gross length is less than 45 or more than 55 yards, or more than 2 yards shorter than the gross length marked on the roll ticket, or not in one continuous piece. The sample size (number of rolls selected for sample) and acceptance number (maximum number of defects acceptable) shall be as shown in table III. The sample unit shall be one roll.

4.2.2.3.2 Total yardage in sample. The lot shall be unacceptable if the total of the actual gross length of rolls in the sample is less than the total of the gross lengths marked on roll tickets.

TABLE III. Sampling size

Lot size in yards	Sample size in rolls	Acceptance number
Up to 1200 1/	3	0
1201 up to and including 3200	5	0
3201 up to and including 10,000	8	0
10,001 up to and including 35,000	13	0
35,001 up to and including 150,000	20	1
150,001 and over	32	2

1/ If lot contains fewer than three rolls, each roll in the lot shall be examined.

4.3 Examination of preparation for delivery requirements. An examination shall be made to determine whether the packaging, packing, and marking comply with the requirements of section 5. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping roll fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping rolls fully prepared for delivery. The lot size shall be the number of shipping rolls in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence, or method of application.
Packaging and packing	Not packaged and packed as specified. Closure of cloth covered rolls incorrect. Any component missing or damaged.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

4.4 Test methods. The methods of testing specified in Fed. Std. No. 191, wherever applicable, and as listed in table IV shall be followed. The physical values specified in section 3 apply to the average of the determinations made on that sample unit for test purposes, as specified in the applicable test methods. The sample unit for testing shall be one linear yard of the completely fabricated laundry padding. The sample size (number of sample units) shall be as shown in the table below. The lot size shall be expressed in units of 1 linear yard. The lot shall be unacceptable if one or more sample units fail to meet any requirements specified. All test reports shall contain the individual values utilized in expressing the final result.

Lot size (yards)	Sample size
800 or less	2
801 up to and including 22,000	3
22,001 and over	5

TABLE IV. Test methods

Characteristic	Requirement paragraph	Test method
Padding		
Cotton identification	3.2.1	1200 1/
Weight per square yard	3.3	5041
Thickness	3.3	Commercial 1/

1/ A certificate of compliance is required and will be acceptable for the requirements specified.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C, as specified (see 6.2).

5.1.1 Level A. Padding shall be tightly rolled and securely tied at each end and at the center with cotton tape or twine. Each roll shall be completely inclosed in a double wrap of 60-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be secured with 3-inch minimum width gummed paper tape conforming to type III, grade C of PPP-T-45.

5.1.2 Level B (civil agencies). Padding shall be packaged in accordance with 5.1.1 (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. Padding shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A. Padding, packaged as specified in 5.1, shall be completely overwrapped in waterproofed kraft paper conforming to class B-2 of PPP-B-1055. All seams and joints of the overwrap shall be sealed with waterproof pressure sensitive tape. The waterproofed rolls of padding shall be packed in bias sewn tubing or a bag (presewn one end) made from cotton osnaburg cloth conforming to class 2 of CCC-C-429, or jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467. The bias-sewn tubing specified shall conform to MIL-T-40625. Tubing or bag packs shall have the open ends closed with two double-looped wire ties. The wire ties shall be not less than 6 inches long, 0.072-inch thick galvanized soft iron or steel wire, with a 1/2-inch diameter formed eye at each end. At least 5 inches of surplus cloth measured from the center of the pack shall be gathered evenly together to form an ear. The first wire tie shall be applied as close to the contents as possible so there will be a minimum of slack in the tube. The second wire tie shall be applied at a distance approximately 1 inch from the first wire tie. The twisted ends of the wire ties shall alternate and face in opposite directions.

5.2.2 Level B. Padding, packaged as specified in 5.1, shall be packed in bias sewn tubing or a bag (presewn one end) made from cotton osnaburg cloth conforming to class 2 of CCC-C-429, or jute (or kenaf) burlap cloth conforming to class 3 of CCC-C-467. The bias-sewn tubing specified shall conform to MIL-T-40625. Tubing or bag packs shall have the open ends closed with two double-looped wire ties. The wire ties shall be not less than 6 inches long, 0.072-inch thick galvanized soft iron or steel wire, with a 1/2-inch diameter formed eye at each end. At least 5 inches of surplus cloth measured from the center of the pack shall be gathered evenly together to form an ear. The first wire tie shall be applied as close to the contents as possible so there will be a minimum of slack in the tube. The second wire tie shall be applied at a distance approximately 1 inch from the first wire tie. The twisted ends of the wire ties shall alternate and face in opposite directions.

5.2.3 Level C. Padding, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

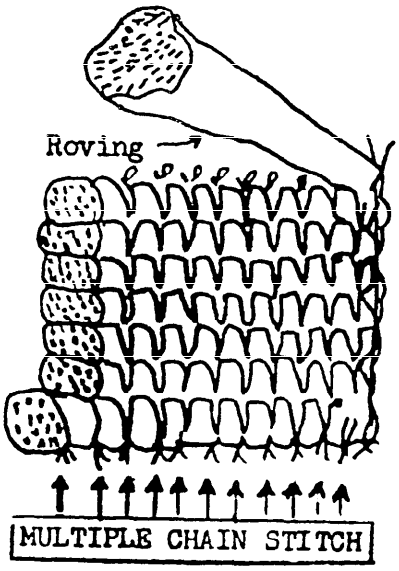


Figure 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military requirements. In addition to any special marking required by the contract or order, shipments shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The padding covered by this specification is intended primarily for use on flatwork ironers and pressing machines.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Length other than that specified (see 3.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When level B packaging is required for civil agencies (see 5.1.2).

6.2.1 Civil agencies. Level A packaging and packing shall be used by ordering agencies only when shipment is known to be made to a holding supply depot or warehouses from which partial shipments will be made to ultimate consumers.

6.3 For access to samples, address the procuring office issuing the invitation for bids.

MILITARY CUSTODIANS:

Army - GL
Navy - SA
Air Force - 82

Review activities:

Army - MD

User activities:

Navy - CG, MC, MS

Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:

GSA - FSS
HEW

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 15 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION
PADDING, COTTON, STITCHED ROVING CCC-P-86E

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

U.S.MAIL

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXNL-103
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:28Z
Check the source to verify that this is the current version before use.