
ZZ-R-765/15C
8 November 1988
SUPERSEDING
ZZ-R-765/15B
20 March 1987

FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; RUBBER SHEET SOLID

This specification is approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the sheets described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

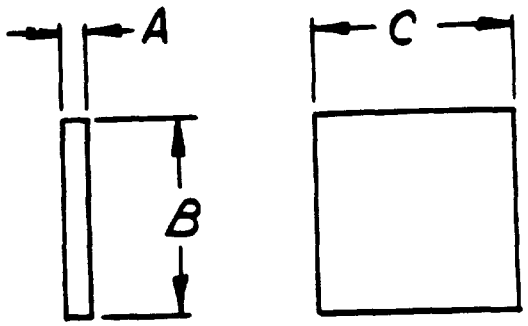

PART NO. ZZR765/15-	A THICKNESS	B WIDTH	C LENGTH	TEMPERATURE RATING °F	NHR MIN	NHR MAX	MIN TENSILE STRENGTH P.S.I.	COLOR
001D5	0.015	36.000	36.000	-80 to 425	45.0	55.0	700	NATURAL
002D6	0.016	36.000	36.000	-80 to 425	55.0	65.0	650	GRAY
003A4	0.020	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL
004F5	0.020	36.000	36.000	-94 to 400	45.0	55.0	1200	NATURAL
005D5	0.031	12.000	12.000	-80 to 425	45.0	55.0	700	NATURAL
006A7	0.031	24.000	36.000	-100 to 425	65.0	75.0	600	GRAY
007F3	0.031	24.000	60.000	-94 to 400	25.0	35.0	1000	NATURAL
008A4	0.031	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL
009B4	0.031	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL

AMSC N/A FSC 9320

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NO. ZZR765/15-	A THICK-NESS	B WIDTH	C LENGTH	TEMPER-ATURE RATING °F	NHR MIN	NHR MAX	MIN TENSILE STRENGTH P.S.I.	COLOR
010C4	0.031	36.000	36.000	-80 to 425	35.0	45.0	700	NATURAL
011C7	0.031	36.000	36.000	-80 to 425	65.0	75.0	650	NATURAL
012D2	0.031	36.000	36.000	-80 to 425	15.0	30.0	700	NATURAL
013D4	0.031	36.000	36.000	-80 to 425	35.0	45.0	700	NATURAL
014D6	0.031	36.000	36.000	-80 to 425	55.0	65.0	650	NATURAL
015D7	0.031	36.000	36.000	-80 to 425	65.0	75.0	650	NATURAL
016E3	0.031	36.000	36.000	-130 to 400	20.0	35.0	850	NATURAL
017E5	0.031	36.000	36.000	-130 to 400	45.0	55.0	1200	GRAY
018E6	0.031	36.000	36.000	-130 to 400	55.0	65.0	1100	NATURAL
019F5	0.031	36.000	36.000	-94 to 400	45.0	55.0	1200	NATURAL
020A5	0.040	36.000	36.000	-100 to 400	45.0	55.0	700	NATURAL
021D6	0.062	10.000	10.000	-80 to 425	55.0	65.0	650	NATURAL
022D5	0.062	12.000	120.000	-80 to 425	45.0	55.0	750	NATURAL
023B4	0.062	24.000	24.000	-100 to 425	35.0	45.0	700	NATURAL
024B4	0.062	24.000	24.000	-100 to 400	35.0	45.0	700	NATURAL
025C4	0.062	24.000	24.000	-80 to 425	35.0	45.0	700	NATURAL
026C5	0.062	24.000	24.000	-80 to 425	45.0	55.0	700	NATURAL
027C6	0.062	24.000	24.000	-80 to 425	55.0	65.0	650	BLACK
028D5	0.062	24.000	24.000	-80 to 425	45.0	55.0	700	NATURAL
029E5	0.062	24.000	24.000	-130 to 400	45.0	55.0	700	NATURAL
030F5	0.062	24.000	48.000	-94 to 400	45.0	55.0	1200	GRAY
031A4	0.062	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL
032C4	0.062	36.000	36.000	-80 to 400	35.0	45.0	700	NATURAL
033C5	0.062	36.000	36.000	-80 to 425	45.0	45.0	700	NATURAL
034C8	0.062	36.000	36.000	-80 to 425	75.0	85.0	650	NATURAL
035D2	0.062	36.000	36.000	-80 to 425	15.0	30.0	700	NATURAL
036D4	0.062	36.000	36.000	-80 to 425	35.0	45.0	700	OLIVE
037D5	0.062	36.000	36.000	-80 to 425	45.0	55.0	700	NATURAL
038D6	0.062	36.000	36.000	-80 to 425	55.0	65.0	650	NATURAL
039F3	0.062	36.000	36.000	-94 to 400	25.0	35.0	1000	NATURAL
040F5	0.062	36.000	36.000	-94 to 400	45.0	55.0	1200	NATURAL

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NO. ZZR765/15-	A THICK-NESS	B WIDTH	C LENGTH	TEMPER-ATURE RATING °F	NHR MIN	NHR MAX	MIN TENSILE STRENGTH P.S.I.	COLOR
041F6	0.062	36.000	36.000	-94 to 400	45.0 to 55.0		700	NATURAL
042C5	0.062	36.000	36.000	-80 to 425	45.0 to 55.0		700	GRAY
043E3	0.062	36.000	36.000	-130 to 400	20.0 to 35.0		850	NATURAL
044E5	0.062	36.000	A/A	-130 to 400	45.0 to 55.0		1200	NATURAL
045B4	0.062	40.000	72.000	-100 to 425	35.0 to 45.0		700	NATURAL
046A5	0.062	24.000	24.000	-100 to 425	45.0 to 55.0		700	NATURAL
047B4	0.080	36.000	36.000	-100 to 425	35.0 to 45.0		700	BLACK
048C5	0.093	36.000	36.000	-100 to 425	35.0 to 45.0		700	NATURAL
049B4	0.093	36.000	36.000	-100 to 425	35.0 to 45.0		700	NATURAL
050C4	0.093	36.000	36.000	-80 to 425	35.0 to 45.0		700	NATURAL
051C5	0.093	36.000	36.000	-80 to 425	45.0 to 55.0		700	BLACK
052D4	0.093	36.000	36.000	-80 to 425	35.0 to 45.0		700	NATURAL
053D5	0.093	36.000	36.000	-80 to 425	45.0 to 55.0		700	NATURAL
054F3	0.093	36.000	36.000	-94 to 400	25.0 to 35.0		1000	NATURAL
055F6	0.093	36.000	36.000	-94 to 400	55.0 to 65.0		1200	NATURAL
056F6	0.093	36.000	A/A	-130 to 425	20.0 to 35.0		850	NATURAL
057D5	0.100	36.000	36.000	-80 to 425	45.0 to 55.0		700	WHITE
058D7	0.125	12.000	12.000	-80 to 425	65.0 to 75.0		650	NATURAL
059C8	0.125	12.000	24.000	-80 to 400	75.0 to 85.0		650	BLACK
060A5	0.125	24.000	24.000	-100 to 325	45.0 to 55.0		700	NATURAL
061A4	0.125	24.000	36.000	-100 to 425	35.0 to 45.0		700	NATURAL
062A6	0.125	36.000	36.000	-100 to 425	55.0 to 65.0		750	NATURAL
063C2	0.125	36.000	36.000	-80 to 425	15.0 to 30.0		700	NATURAL
064C5	0.125	36.000	36.000	-80 to 425	45.0 to 55.0		700	NATURAL
065C6	0.125	36.000	36.000	-80 to 425	55.0 to 65.0		650	BLACK
066D5	0.125	36.000	36.000	-80 to 425	45.0 to 55.0		700	WHITE
067F3	0.125	36.000	36.000	-94 to 400	25.0 to 35.0		1000	BLACK
068F5	0.125	36.000	36.000	-94 to 400	55.0 to 65.0		1200	NATURAL
069F6	0.125	36.000	36.000	-94 to 400	55.0 to 65.0		1000	NATURAL
070F8	0.125	36.000	36.000	-94 to 400	75.0 to 85.0		800	NATURAL
071E3	0.125	36.000	A/A	-130 to 425	20.0 to 35.0		850	NATURAL
072C8	0.125	48.000	48.000	-80 to 425	75.0 to 85.0		650	WHITE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NO. ZZR765/15-	A THICKNESS	B WIDTH	C LENGTH	TEMPERATURE RATING °F	NHR MIN	NHR MAX	MIN TENSILE STRENGTH P.S.I.	COLOR
073D5	0.150	24.000	24.000	-80 to 425	45.0	55.0	700	WHITE
074D4	0.180	36.000	36.000	-80 to 425	35.0	45.0	700	WHITE
075C6	0.188	36.000	36.000	-80 to 425	55.0	65.0	650	NATURAL
076A4	0.250	A/A	A/A	-100 to 425	35.0	45.0	700	NATURAL
077C5	0.250	12.000	12.000	-80 to 425	45.0	55.0	750	NATURAL
078A6	0.250	36.000	36.000	-100 to 425	55.0	65.0	650	NATURAL
079C5	0.250	36.000	36.000	-80 to 425	45.0	55.0	700	NATURAL
080D4	0.250	36.000	36.000	-80 to 425	35.0	45.0	750	NATURAL
081D6	0.250	36.000	36.000	-80 to 425	55.0	65.0	650	OLIVE DRAB
082F5	0.250	36.000	36.000	-94 to 400	45.0	55.0	1200	NATURAL
083F8	0.250	36.000	36.000	-94 to 400	75.0	85.0	800	NATURAL
084C6	0.250	36.000	36.000	-80 to 425	55.0	65.0	650	NATURAL
085E3	0.250	486.000	48.000	-130 to 400	20.0	35.0	850	NATURAL
086E5	0.281	36.000	36.000	-130 to 400	45.0	55.0	1200	NATURAL
087C5	0.320	12.000	12.000	-80 to 425	45.0	55.0	700	NATURAL
088B5	0.393	11.790	11.790	-100 to 425	45.0	55.0	700	NATURAL
089F5	0.438	24.000	24.000	-94 to 400	45.0	55.0	1200	GRAY
090F5	0.625	24.000	24.000	-94 to 400	45.0	55.0	1200	NATURAL
091C4	0.625	36.000	36.000	-80 to 425	35.0	45.0	700	WHITE
092F5	0.750	24.000	48.000	-94 to 400	45.0	55.0	1200	GRAY
093F6	1.000	24.000	24.000	-94 to 425	55.0	65.0	1200	NATURAL
094C4	1.250	36.000	36.000	-80 to 425	35.0	45.0	700	NATURAL
095F3	0.080	36.000	A/A	-94 to 400	25.0	35.0	1000	GRAY
096B4	0.125	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL
097B4	0.250	36.000	36.000	-100 to 425	35.0	45.0	700	NATURAL
098D5	0.050	36.000	36.000	-80 to 425	45.0	55.0	700	NATURAL
*099B6	0.031	36.000	36.000	-100 to 425	55.0	65.0	700	GRAY

NOTES:
1. Unless otherwise noted, dimensions are in inches.
2. Surface Condition: Smooth.
3. Surface Condition Location: Both Sides.
4. Color Location: Both Sides.
5. NHR: Nonmetallic Hardness Rating, Shore Durometer A.
6. Minimum Tensile Strength: psi.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.


7. A/A: Any acceptable.
8. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	$(t^{o}F-32)/1.8$	=	degree Celsius (^{o}C)
psi	6.894×10^{-3}	=	mega pascal (MPa)

NOTE: Asterisks have been placed in the left hand margins of this specification to indicate where significant changes from the previous issue were made. This was done as a convenience only and the government assumes no liability whatsoever for any inaccuracies in these notations.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

ZZR765/01 -001 A 2 Example of part number: ZZR765/01-001A2

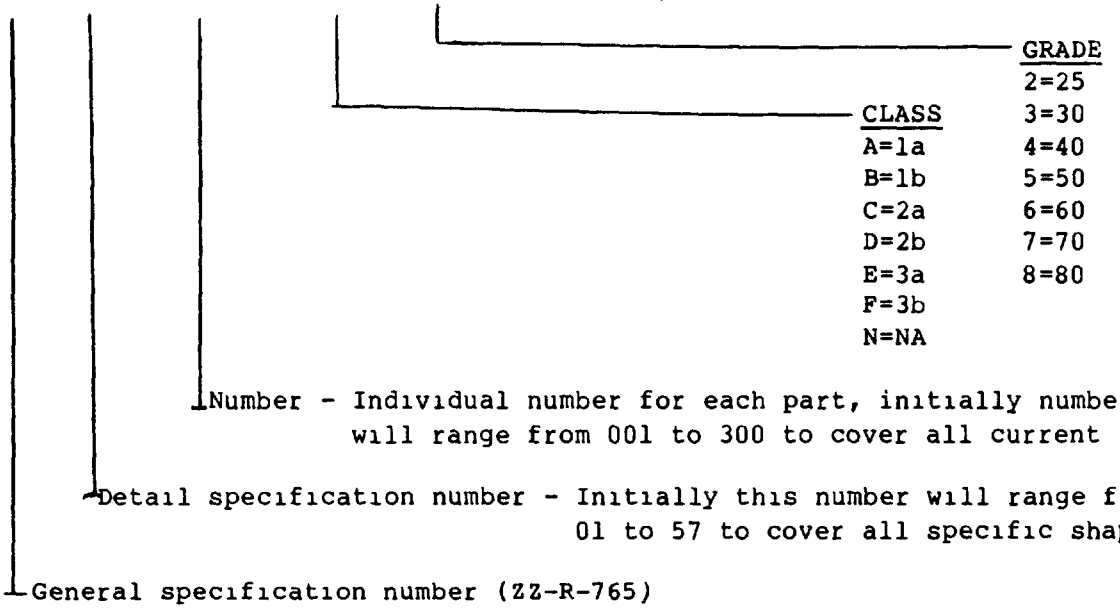

MILITARY INTERESTS:

Custodians:
Army -- MR
Navy -- AS
Air Force -- 20

Review activity:
DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:
Army -- MR

(Project 9320-1068)

(WP# ID-7059A/DISK-0555A. FOR MTL USE ONLY).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.