
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; NONMETALLIC SPECIAL SHAPED SECTION

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the sections described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.

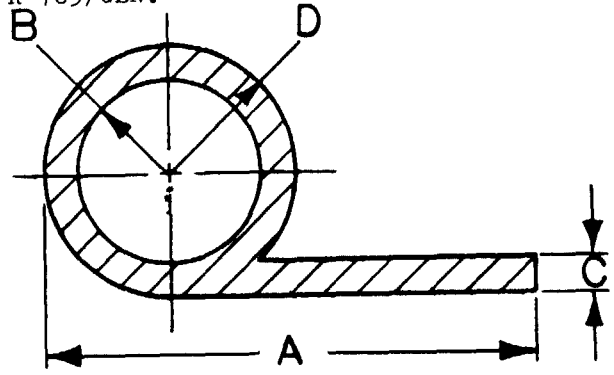

PART NO. ZZZ65/19-	A	B	C	D	LENGTH	NHR MIN.	NHR MAX.	MINIMUM TENSILE STRENGTH P.S.I.	COLOR	TEMPERATURE RATING°F	SPECIAL FEATURES
001A4	0.620	0.060	0.060	0.120	A/A	35.0	45.0	700	NATURAL	-100 to 425	NONE
002B4	0.625	0.062	0.063	0.125	91.25	35.0	45.0	700	NATURAL	-100 to 425	NONE
003C5	0.640	0.039	0.062	0.101	A/A	45.0	55.0	700	NATURAL	-80 to 425	NONE
004C5	0.688	0.093	0.063	0.125	A/A	45.0	55.0	700	NATURAL	-80 to 525	0.010 in. first fillet radius

AMSC: N/A

/FSC 9320/

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

ROUND, HOLLOW CORE (CONTINUED)

PART NO. ZZZ65/19-	A	B	C	D	LENGTH	NHR MIN.	NHR MAX.	MINIMUM TENSILE STRENGTH P.S.I.	COLOR	TEMPERATURE RATING°F	SPECIAL FEATURES
005B6	0.870	0.154	0.031	0.185	55.0	55.0 to 65.0		650	NATURAL	-100 to 425	NONE
006B6	0.870	0.154	0.031	0.185	144.0	55.0 to 65.0		650	WHITE	-100 to 425	NONE
007C5	0.875	0.078	0.046	0.125	72.0	45.0 to 55.0		700	OLIVE GREEN	-80 to 425	NONE
008C5	0.875	0.125	0.062	0.187	A/A	45.0 to 55.0		700	NATURAL	-80 to 425	NONE
009B5	0.940	0.125	0.064	0.188	A/A	45.0 to 55.0		700	NATURAL	-100 to 425	0.015 in first fillet radius
010B5	1.000	0.135	0.050	0.175	42.0	45.0 to 55.0		700	NATURAL	-80 to 425	0.060 in first fillet radius
011F6	1.000	0.135	0.060	0.185	120.0	55.0 to 65.0		1200	NATURAL	-94 to 400	NONE
012C5	1.000	0.140	0.050	0.190	26.0	45.0 to 55.0		700	NATURAL	-800 to 425	NONE
013C6	1.000	0.187	0.062	0.250	A/A	55.0 to 65.0		700	NATURAL	-80 to 425	NONE
014E5	1.000	0.187	0.063	0.250	A/A	45.0 to 55.0		1200	NATURAL	-130 to 400	NONE
015A6	1.000	0.190	0.130	0.320	A/A	55.0 to 65.0		650	NATURAL	-100 to 425	NONE
016E5	1.030	0.148	0.040	0.188	A/A	45.0 to 55.0		650	NATURAL	-130 to 400	0.060 in. first fillet radius
017E5	1.040	0.115	0.060	0.175	A/A	45.0 to 55.0		1200	WHITE	-130 to 400	NONE
018F5	1.060	0.087	0.062	0.250	A/A	45.0 to 55.0		1200	NATURAL	-80 to 425	NONE
019C5	1.060	0.220	0.080	0.280	192.0	45.0 to 55.0		700	NATURAL	-80 to 425	NONE
020F5	1.090	0.188	0.062	0.250	A/A	45.0 to 55.0		1200	NATURAL	-94 to 400	NONE
021C5	1.125	0.188	0.125	0.250	96 to 120	45.0 to 55.0		700	WHITE	-80 to 425	NONE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

ROUND, HOLLOW CORE (CONTINUED)


PART NO. ZZZ65/19-	A	B	C	D	LENGTH	NHR MIN.	NHR MAX.	MINIMUM TENSILE STRENGTH P.S.I.	COLOR	TEMPERATURE RATING°F	SPECIAL FEATURES
022F5	0.140	0.140	0.050	0.190	66.0	45.0	55.0	1200	NATURAL	-94 to 400	0.030 in. first fillet radius
023C5	1.180	0.186	0.064	0.250	A/A	45.0	55.0	700	NATURAL	-80 to 425	NONE
024E3	1.200	0.060	0.063	0.125	120.0	20.0	35.0	850	NATURAL	-130 to 400	0.062 in. first fillet radius
025F5	1.495	0.325	0.045	0.375	96.0	45.0	55.0	1200	NATURAL	-94 to 400	0.060 in. first fillet radius
026F5	1.500	0.145	0.100	0.185	A/A	45.0	55.0	1200	GRAY	-94 to 400	0.060 in. first fillet radius
027D6	5.406	0.094	0.062	0.156	A/A	55.0	65.0	650	NATURAL	-80 to 425	NONE

NOTES:
1. Dimensions are in inches.
2. A: Width.
3. B: Inside Radius.
4. C: Flange Thickness.
5. D: Outside Radius.
6. A/A: Any Acceptable.
7. NHR: Nonmetallic Hardness Rating, Shore Durometer A.
8. Minimum Tensile Strength in psi.
9. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	$(t^{\circ}F-32)/1.8$	=	degree Celsius ($^{\circ}C$)
psi	6.894×10^{-3}	=	mega pascal (MPa)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

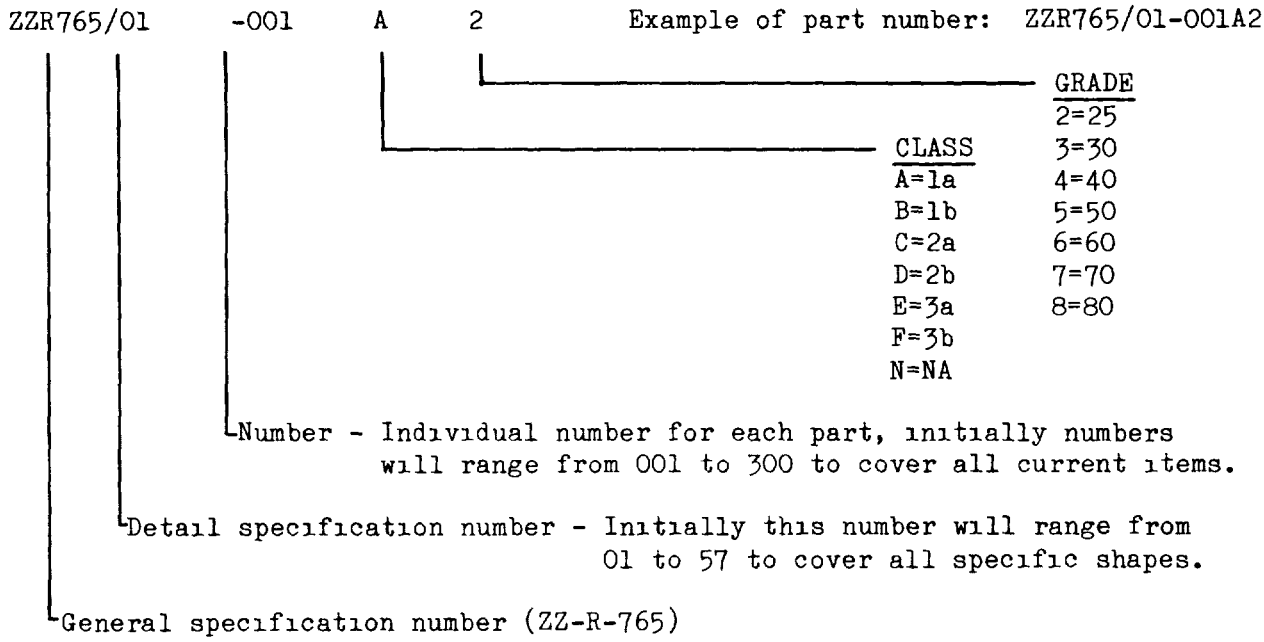

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA --GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0386

(KBWP# ID-7059A/DISK-0535A. FOR AMMRC USE ONLY).

☆U S GOVERNMENT PRINTING OFFICE 1986 — 605-036/41026

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:27Z
Check the source to verify that this is the current version before use.