
FEDERAL SPECIFICATION SHEET

RUBBER, SILICONE; TUBING, NONMETALIC, ROUND, FLEXIBLE

This specification is approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the tubing described herein shall consist of this document and the latest issue of ZZ-R-765/GEN.



PART NO. ZZR765/9-	SPECIFIED SIZE	A INSIDE DIA MAX.	A INSIDE DIA MIN.	B WALL THICK-NESS	TOLERANCES PLUS OR MINUS	TEMPERATURE RATING °F	NONMETALLIC HARDNESS RATING	MIN. TENSILE STRENGTH	COLOR	LENGTH
001	0.022(No.24)	0.027	0.020	0.012	0.002	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
010	0.027(No.22)	0.032	0.025	0.012	0.002	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
020	0.034(No.20)	0.039	0.032	0.016	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
030	0.042(No.18)	0.049	0.040	0.016	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
040	0.053(No.16)	0.061	0.051	0.016	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
050	0.066(No.14)	0.074	0.064	0.016	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
060F6	0.085(No.12)	0.091	0.081	0.016	0.003	-94 to 400	55.0 to 65.0	1200 P.S.I	NOTE 4	NOTE 5
070	0.095(No.11)	0.101	0.091	0.016	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
080F5	0.106(No.10)	0.112	0.102	0.016	0.003	-94 to 400	45.0 to 55.0	1200 P.S.I.	RED	NOTE 5

AMSC: N/A

FSC 9320

DISTRIBUTION STATEMENT A Approved for public release; distribution unlimited.

ZZ-R-765/9
21 February 1986

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

PART NO. ZZR765/9-	SPECIFIED SIZE	A INSIDE DIA MAX.	A INSIDE DIA MIN.	B WALL THICK-NESS	TOLERANCES PLUS OR MINUS	TEMPERATURE RATING °F	NONMETALLIC HARDNESS RATING	MIN. TENSILE STRENGTH	COLOR	LENGTH
090D6	0.118(No.9)	0.124	0.114	0.020	0.003	-80 to 425	55.0 to 65.0	650 P.S.I.	RED	28,000
100	0.133(No.8)	0.141	0.129	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
110F5	0.148(No.7)	0.158	0.144	0.020	0.003	-94 to 400	45.0 to 55.0	1200 P.S.I.	NOTE 4	NOTE 5
120	0.166(No.6)	0.178	0.162	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
130D5	0.186(No.5)	0.198	0.182	0.020	0.003	-80 to 425	45.0 to 55.0	700 P.S.I	NOTE 4	NOTE 5
131D5	0.186(No.5)	0.198	0.182	0.020	0.003	-80 tp 425	45.0 to 55.0	700 P.S.I	RED	NOTE 5
132D5	0.186(No.5)	0.198	0.182	0.020	0.003	-80 to 425	45.0 to 55.0	700 P.S.I	GREEN	15,000
133C6	0.186(No.5)	0.198	0.182	0.020	0.003	-80 to 425	55.0 to 65.0	650 P.S.I	GREEN	NOTE 5
140	0.208(No.4)	0.224	0.204	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
150	0.234(No.3)	0.249	0.229	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
160	0.263(No.2)	0.278	0.258	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
170	0.294(No.1)	0.311	0.289	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
180	0.330(No.0)	0.347	0.325	0.020	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
190	0.313(5/16)	0.334	0.312	0.025	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
200C5	0.375(3/8)	0.399	0.375	0.025	0.003	-80 to 425	45.0 to 55.0	700 P.S.I.	NOTE 4	NOTE 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.


PART NO. ZZR765/9-	SPECIFIED SIZE	A INSIDE DIA MAX.	A INSIDE DIA MIN.	B WALL THICK-NESS	TOLERANCES PLUS OR MINUS	TEMPERATURE RATING °F	NONMETALLIC HARDNESS RATING	MIN. TENSILE STRENGTH	COLOR	LENGTH
201C7	0.375(3/8)	0.399	0.375	0.025	0.003	-80 to 425	65.0 to 75.0	650 P.S.I.	NOTE 4	NOTE 5
292D5	0.375(3/8)	0.399	0.375	0.025	0.003	-80 to 425	45.0 to 55.0	700 P.S.I.	NOTE 4	NOTE 5
210	0.438(7/16)	0.462	0.438	0.025	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
220	0.500(1/2)	0.524	0.500	0.025	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
230	0.625(5/8)	0.655	0.625	0.030	0.003	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
240	0.725(3/4)	0.786	0.750	0.035	0.005	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
250	0.875(7/8)	0.911	0.875	0.035	0.005	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
260	1.000(1)	1.036	1.000	0.035	0.005	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
270	1.250(1 1/4)	1.290	1.250	0.040	0.005	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
280	1.500(1 1/2)	1.550	1.550	0.045	0.006	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
290	1.750(1 3/4)	1.812	1.750	0.055	0.008	NOTE 2	NOTE 3	NOTE 3	NOTE 4	NOTE 5
300	2.000(2)	2.070	2.000	0.060	0.010	NOTE 2	NOTE 3	NOTE 3	NOTE 4	Note 5

NOTES:
1. Dimensions are in inches.
2. Temperature Rating is determined by the Class of material specified per ZZ-R-765/GEN.
3. Nonmetallic Hardness Rating (Shore Durometer A) and Minimum Tensile Strength are determined by the Grade of material specified per ZZ-R-765/GEN.
4. Unless otherwise specified the color will be the natural color of the material furnished.
5. Shall be furnished in 100, 200, 500 or 1000 foot coils unless otherwise specified in the contract or purchase order.
6. When metric units are required, units for inch, degree fahrenheit and psi may be converted to the metric equivalent as follows:

English	Multiply by	Equals	Metric unit
inch	2.54	=	centimeter (cm)
degree fahrenheit	$(t^{o}F-32)/1.8$	=	degree Celsius (^{o}C)
psi	6.894×10^{-3}	=	mega pascal (MPa)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.

PART NUMBERING SYSTEM FOR FEDERAL SPECIFICATION ZZ-R-765/GEN

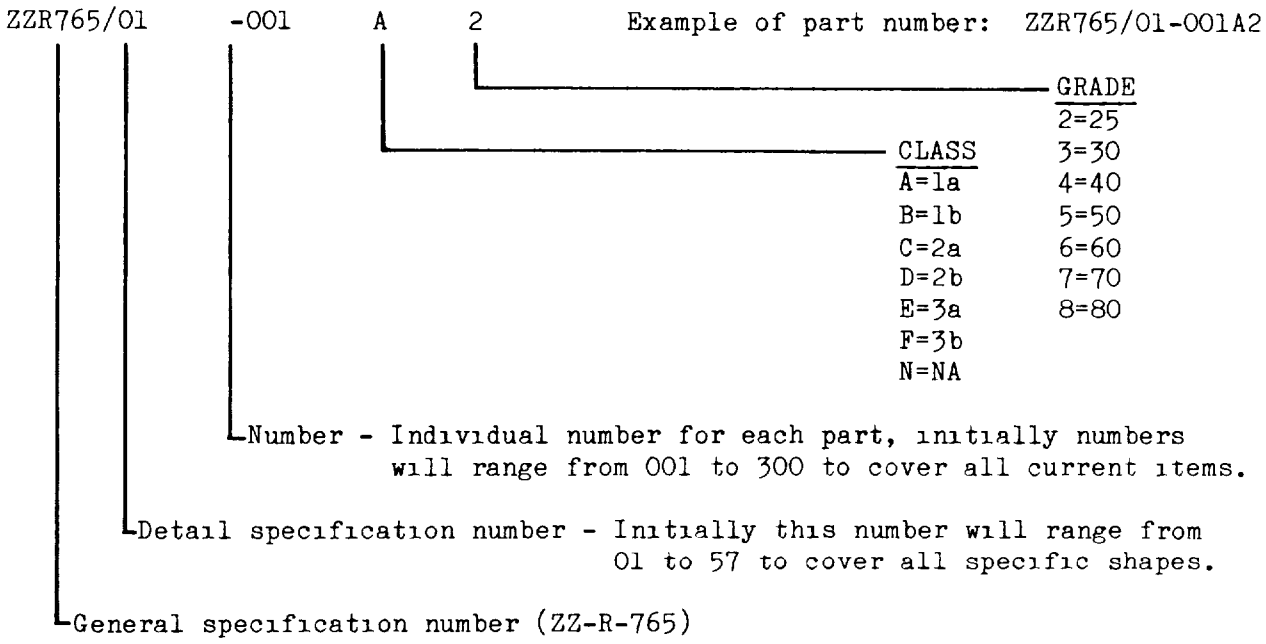

MILITARY INTERESTS:

Custodians

Army -- MR
Navy -- AS
Air Force -- 20

Review activity

DLA -- GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA -- FSS

PREPARING ACTIVITY:

Army -- MR

Project No. 9320-0362

(KBWP# ID-7059A/DISK-0555A. FOR AMMRC USE ONLY).

☆U S GOVERNMENT PRINTING OFFICE 1986 — 605 036/41019

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T12:26Z
Check the source to verify that this is the current version before use.