MILITARY SPECIFICATION

SEMICONDUCTOR DEVICE, TRANSISTOR, NPN, SILICON, SWITCHING, MEDIUM-POWER

TYPES 2N696 AND 2N697

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

## 1. SCOPE

1.1 Scope. This specification covers the detail requirements for NPN, silicon, switching, medium-power transistors.

1.2 Physical dimensions. See figure 1 (TO-5).

1.3 Maximum ratings.

| $P_T$ | | $V_{CBO}$ | $V_{EBO}$ | $V_{CER}$ | $\theta_{J-C}$ | $T_{stg}$ |
|---|---|---|---|---|---|---|
| $T_C$ = 25° C 1/ | $T_A$ = 25° C 2/ | | | $R_{BE}$ = 10 ohms | | |
| W | W | Vdc | Vdc | Vdc | °C/mW | °C |
| 2 | 0.6 | 60 | 5 | 40 | 0.075 | -65 to +200 |

1/ Derate linearly 13.3 mW/°C for $T_C > 25°C$.
2/ Derate linearly 4 mW/°C for $T_A > 25°C$.

1.4 Primary electrical characteristics.

| | $h_{FE}$ 1/ $I_C$ = 150 mAdc $V_{CE}$ = 10 Vdc | | $\lvert h_{fe} \rvert$ $V_{CE}$ = 10 Vdc $I_C$ = 50 mAdc f = 20 MHz | | Switching $t_{on}$ | Switching $t_{off}$ | $C_{obo}$ $V_{CB}$ = 10 Vdc $I_E$ = 0 100 kHz ≤ f ≤ 1 MHz | $V_{CE}$(sat) 1/ $I_C$ = 150 mAdc $I_B$ = 15 mAdc | $V_{BE}$(sat) 1/ $I_C$ = 150 mAdc $I_B$ = 15 mAdc |
|---|---|---|---|---|---|---|---|---|---|
| | 2N696 | 2N697 | 2N696 | 2N697 | nsec | nsec | pf | Vdc | Vdc |
| Min | 20 | 40 | 2.5 | 3.0 | --- | --- | 8 | 0.3 | --- |
| Max | 60 | 120 | 10 | 12 | 200 | 1,000 | 25 | 1.5 | 1.3 |

1/ Pulsed (see 4.4.1).

## 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-S-19500 - Semiconductor Devices, General Specification for.

FSC 5961

Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the currentversion before use.

STANDARDS

MILITARY

MIL-STD-202 - Test Methods for Electronic and Electrical Component Parts.
MIL-STD-750 - Test Methods for Semiconductor Devices.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General. Requirements shall be in accordance with MIL-S-19500, and as specified herein.

3.2 Abbreviations, symbols, and definitions. The abbreviations, symbols, and definitions used herein are defined in MIL-S-19500, and as follows:

$t_{off}$ - - - - - - - - - - - - - $t_s + t_f$

3.3 Design, construction, and physical dimensions. Transistors shall be of the design, construction, and physical dimensions shown on figure 1.

3.3.1 Lead material and finish. Lead material and finish shall be gold-plated Kovar. (Leads may be tin-coated if specified in the contract or order, and it shall not be construed as adversely affecting the qualified-product status of the device, or applicable JAN marking (see 6.2).

3.3.2 Terminal-lead length. Terminal-lead length(s) other than that specified in figure 1 may be furnished under contract or order (see 6.2) where the devices covered herein are required directly for particular equipment-circuit installation or for automatic-assembly-technique programs. Where other lead lengths are required and provided, it shall not be construed as adversely affecting the qualified-product status of the device, or applicable JAN marking (see 6.2).

3.4 Performance characteristics. Performance characteristics shall be as specified in tables I, II, and III.

3.5 Marking. The following marking specified in MIL-S-19500 may be omitted from the body of the transistor at the option of the manufacturer:

(a) Country of origin.
(b) Manufacturer's identification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection. Sampling and inspection shall be in accordance with MIL-S-19500, and as specified herein.

4.2 Qualification inspection. Qualification inspection shall consist of the examinations and tests specified in tables I, II, and III.


4.3 Quality conformance inspection. Quality conformance inspection shall consist of groups A, B, and C inspections.

4.3.1 Group A inspection. Group A inspection shall consist of the examinations and tests specified in table I.

4.3.2 Group B inspection. Group B inspection shall consist of the examinations and tests specified in table II.



Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the currentversion before use.

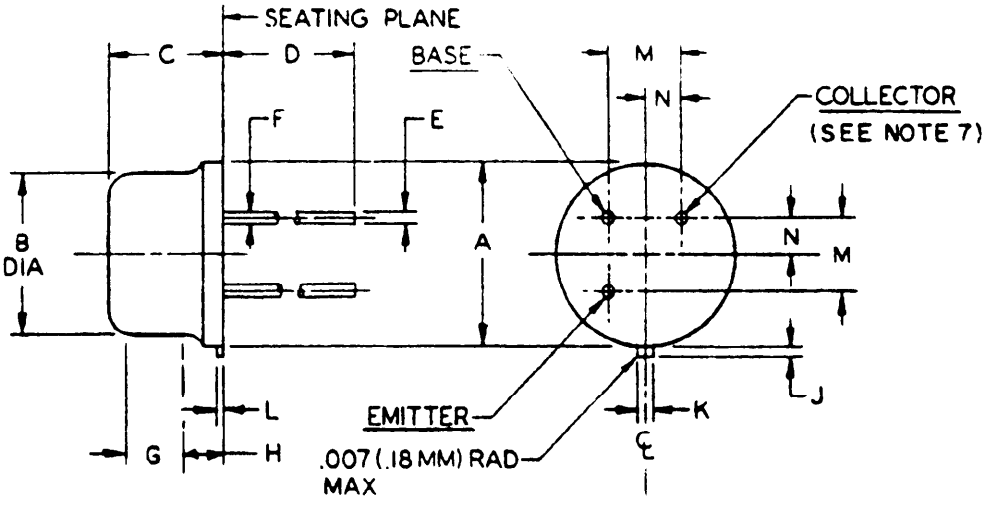



| DIMENSIONS | | | | | NOTES |
|---|---|---|---|---|---|
| LTR | INCHES | | MILLIMETERS | | |
| | MIN | MAX | MIN | MAX | |
| A | .335 | .370 | 8.51 | 9.40 | |
| B | .305 | .335 | 7.75 | 8.51 | |
| C | .240 | .260 | 6.10 | 6.60 | |
| D | 1.500 | .750 | 38.10 | 44.45 | 9 |
| E | .016 | .021 | .41 | .53 | 2,9 |
| F | .016 | .019 | .41 | .48 | 3,9 |
| G | .100 | | 2.54 | | 4 |
| H | | | | | 5 |
| J | .029 | .045 | .74 | 1.14 | 8 |
| K | .028 | .034 | .71 | .86 | |
| L | .009 | .125 | .23 | 3.18 | |
| M | .1414 Nom | | 3.59 Nom | | 6 |
| N | .0707 Nom | | 1.80 Nom | | 6 |

NOTES:
1. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
2. Measured in the zone beyond .250 (6.35 mm) from the seating plane.
3. Measured in the zone .050 (1.27 mm) and .250 (6.35 mm) from the seating plane.
4. Variations on Dimension B in this zone shall not exceed .010 (.25 mm).
5. Outline in this zone is not controlled.
6. When measured in a gaging plane .054+.001, -.000 (1.37+.03, -.00 mm) below the seating plane of the transistor maximum diameter leads shall be within .007 (.18 mm) of their true location relative to a maximum width tab. Smaller diameter leads shall fall within the outline of the maximum diameter lead tolerance. Figure 2 preferred measured method.
7. The collector shall be internally connected to the case.
8. Measured from the maximum diameter of the actual device.
9. All 3 leads (See 3.3.1 and 3.3.2).

FIGURE 1. Physical dimensions of transistor types 2N696 and 2N697 (TO-5).



Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the currentversion before use.

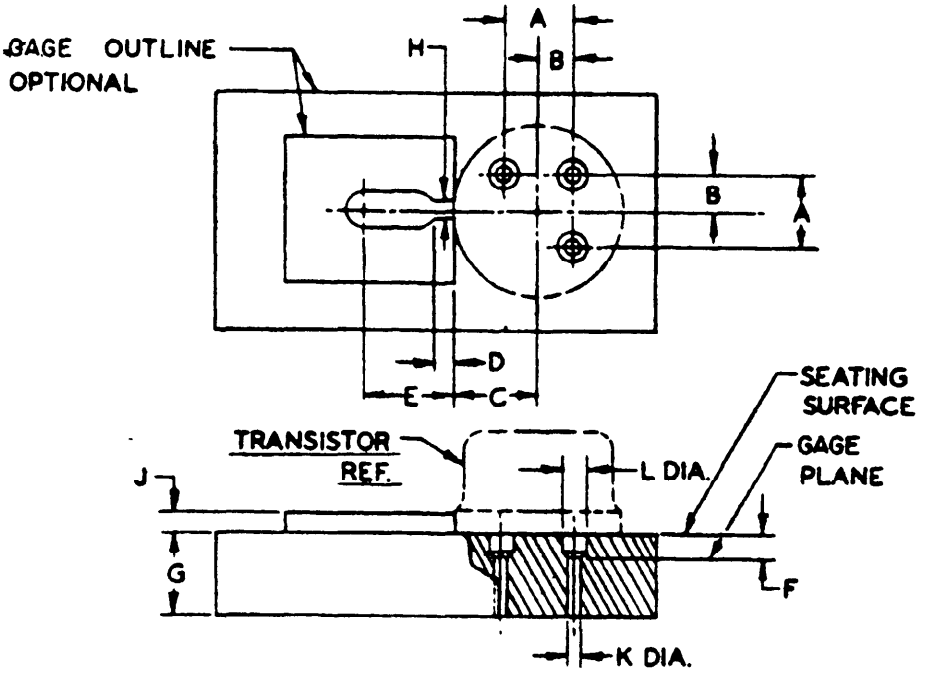


| DIMENSIONS | | | | | NOTES |
|---|---|---|---|---|---|
| LTR | INCHES | | MILLIMETERS | | |
| | MIN | MAX | MIN | MAX | |
| A | .1409 | .1419 | 3.58 | 3.60 | |
| B | .0702 | .0712 | 1.78 | 1.81 | |
| C | .182 | .199 | 4.62 | 5.05 | |
| D | .009 | .011 | .23 | .28 | |
| E | .125 Nom | | 3.18 Nom | | |
| F | .054 | .055 | 1.37 | 1.40 | |
| G | .372 | .378 | 9.45 | 9.60 | |
| H | .0350 | .0355 | .89 | .90 | |
| J | .150 Nom | | 3.81 Nom | | |
| K | .0325 | .0335 | .83 | .85 | |
| L | .0595 | .0605 | 1.51 | 1.54 | |

NOTES:

1. The following gaging procedure shall be used: The use of a pin straightener prior to insertion in the gage is permissible. The device being measured shall be inserted until its seating plane is .125±.010 (3.18 mm ±.25 mm) from the seating surface of the gage. A spacer may be used to obtain the .125 (3.18 mm) distance from the gage seat prior to force application. A force of 8 oz ±.5 oz shall then be applied parallel and symmetrical to the device's cylindrical axis. When examined visually after the force application ( the force need not be removed ) the seating plane of the device shall be seated against the gage.
2. The location of the tab locator, within the limits of dim C, will be determined by the tab and flange dimension of the device being checked.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FIGURE 2. Gage for lead and tab location for transistor types 2N696 and 2N697.



Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the currentversion before use.

4.3.3 Group C inspection. Group C inspection shall consist of the examinations and tests specified in table III. This inspection shall be conducted on the initial lot and thereafter every 6 months during production.

4.3.4 Group B and group C life-test samples. Samples that have been subjected to group B, 340-hours life-test, may be continued on test to 1,000 hours in order to satisfy group C life-test requirements. These samples shall be predesignated, and shall remain subjected to the group C 1,000 hour acceptance evaluation after they have passed the group B, 340-hour acceptance criteria. The cumulative total of failures found during 340-hour test and during the subsequent interval up to 1,000 hours shall be computed for 1,000-hour acceptance criteria (see 4.3.3).

4.4 Methods of examination and test. Methods of examination and test shall be as specified in tables I, II, and III, and as follows:

4.4.1 Pulse measurements. Conditions for pulse measurement shall be as specified in section 4 of MIL-STD-750.

4.4.2 Interval for end-point test measurements. End-point tests shall be completed within the following time limitations after completion of the last test in the subgroup:

(a) Qualification inspection - Within 24 hours.
(b) Quality conformance inspection - Within 96 hours.

TABLE I. Group A inspection.

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 1 | | | 10 | | | | |
| Visual and mechanical examination | 2071 | | | --- | --- | --- | --- |
| Subgroup 2 | | | 5 | | | | |
| Breakdown voltage, collector to base | 3001 | Bias cond. D; $I_C$ = 100 μAdc | | $BV_{CBO}$ | 60 | --- | Vdc |
| Breakdown voltage, emitter to base | 3026 | Bias cond. D; $I_E$ = 100 μAdc | | $BV_{EBO}$ | 5.0 | --- | Vdc |
| Breakdown voltage, collector to emitter | 3011 | Bias cond. B; $I_C$ = 100 mAdc; $R_{BE}$ = 10 ohms; pulsed (see 4.4.1) | | $BV_{CER}$ | 40 | --- | Vdc |
| Collector to base cutoff current | 3036 | Bias cond. D; $V_{CB}$ = 30 Vdc | | $I_{CBO}$ | --- | 0.1 | μAdc |
| Subgroup 3 | | | 5 | | | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 10 Vdc; $I_C$ = 10 mAdc; pulsed (see 4.4.1) | | $h_{FE}$ | | | |
| 2N696 | | | | | 20 | --- | --- |
| 2N697 | | | | | 40 | --- | --- |




Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.

TABLE I. Group A inspection - Continued

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 3 - Continued | | | | | | | |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 10 Vdc; $I_C$ = 150 mAdc; pulsed (see 4.4.1) | | $h_{FE}$ | | | |
| 2N696 | | | | | 20 | 60 | --- |
| 2N697 | | | | | 40 | 120 | --- |
| Forward-current transfer ratio | 3076 | $V_{CE}$ = 10 Vdc; $I_C$ = 500 mAdc; pulsed (see 4.4.1) | | $h_{FE}$ | | | |
| 2N696 | | | | | 12.5 | --- | --- |
| 2N697 | | | | | 20.0 | --- | --- |
| Subgroup 4 | | | 5 | | | | |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = 150 mAdc; $I_B$ = 15 mAdc; pulsed (see 4.4.1) | | $V_{CE}(sat)$ | 0.3 | 1.5 | Vdc |
| Base emitter voltage (saturated) | 3066 | Test cond. A; $I_C$ = 150 mAdc; $I_B$ = 15 mAdc; pulsed (see 4.4.1) | | $V_{BE}(sat)$ | --- | 1.3 | Vdc |
| Magnitude of common-emitter small-signal short-circuit forward-current transfer ratio | 3306 | $I_C$ = 50 mAdc; $V_{CE}$ = 10 Vdc; f = 20 MHz | | $\lvert h_{fe} \rvert$ | | | |
| 2N696 | | | | | 2.5 | 10 | --- |
| 2N697 | | | | | 3.0 | 12 | --- |
| Open circuit output capacitance | 3236 | $V_{CB}$ = 10 Vdc; $I_E$ = 0; 100 kHz $\leq$ f $\leq$ 1 MHz | | $C_{obo}$ | 8 | 25 | pf |
| Subgroup 5 | | | 10 | | | | |
| Low-temperature operation: Forward-current transfer ratio | 3076 | $T_A$ = -55° C; $I_C$ = 10 mAdc; $V_{CE}$ = 10 Vdc pulsed (see 4.4.1) | | $h_{FE}$ | | | |
| 2N696 | | | | | 10 | --- | --- |
| 2N697 | | | | | 20 | --- | --- |
| High-temperature operation: Collector to base cutoff current | 3036 | $T_A$ = 150° C; Bias cond. D; $V_{CB}$ = 30 Vdc | | $I_{CBO}$ | --- | 10 | µAdc |
| Subgroup 6 | | | 10 | | | | |
| Switching time: | | | | | | | |
| Turn-on time | --- | (see figure 3) | | $t_{on}$ | --- | 200 | nsec |
| Turn-off time | --- | (see figure 4) | | $t_{off}$ | --- | 1000 | nsec |




Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.

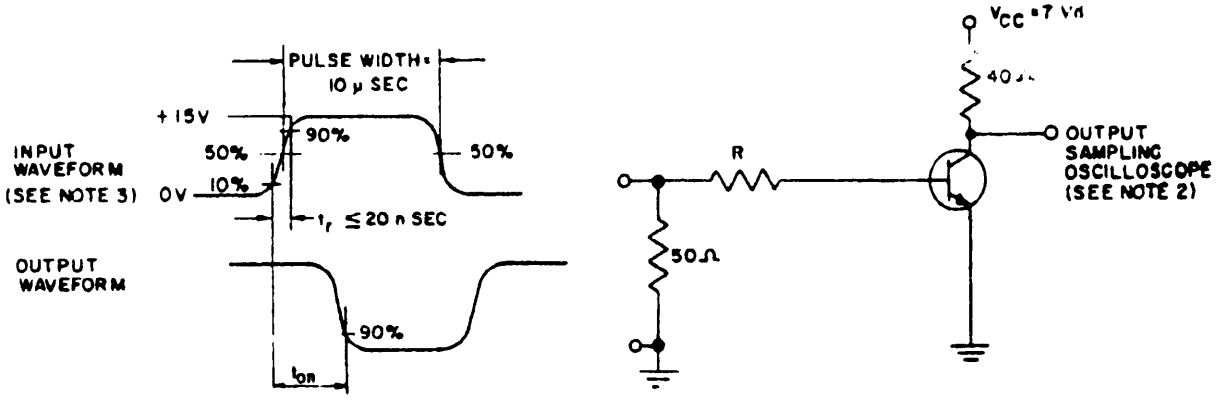


NOTES:
1. Equivalent circuits may be used.
2. Sampling oscilloscope: $Z_{in} \geq 100$ K ohms, $C_{in} \leq 12$ pf, $t_r \leq 15$ nsec.
3. Duty cycle = 1%.

FIGURE 3. Switching-time ($t_d + t_r$) test circuit.

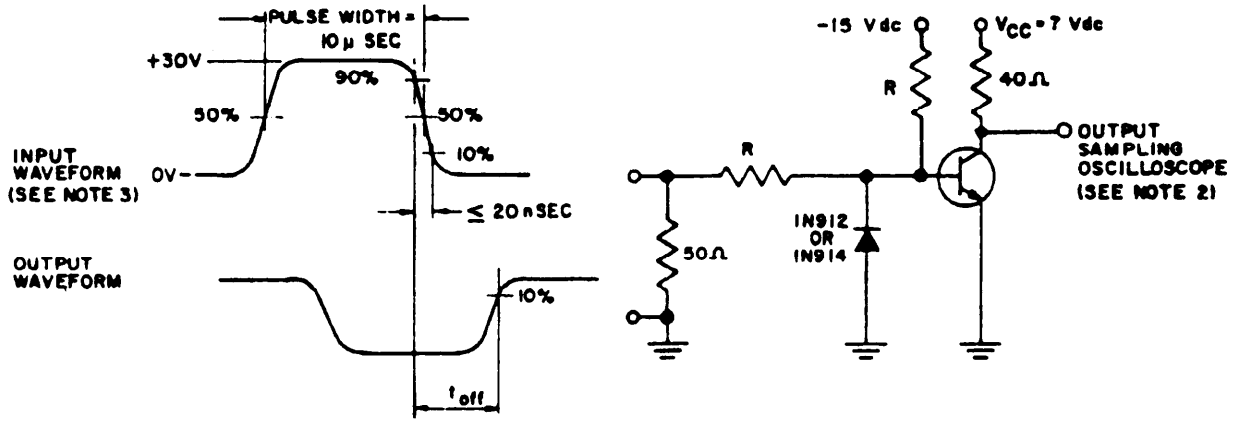


NOTES:
1. Equivalent circuits may be used.
2. Sampling oscilloscope: $Z_{in} \geq 100$ K ohms, $C_{in} \leq 12$ pf, $t_r \leq 15$ nsec.
3. Duty cycle = 1%.

FIGURE 4. Switching time ($t_s + t_f$) test circuits.



Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the current version before use.

TABLE II. Group B inspection

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 1 | | | 20 | | | | |
| Physical dimensions | 2066 | | | --- | --- | --- | --- |
| Subgroup 2 | | | 10 | | | | |
| Solderability | 2026 | Omit aging | | --- | --- | --- | --- |
| Thermal shock (temperature cycling) | 1051 | Test cond. C | | --- | --- | --- | --- |
| Thermal shock (glass strain) | 1056 | Test cond. A | | --- | --- | --- | --- |
| Seal (leak-rate) | --- | MIL-STD-202, method 112, test cond. C, procedure III; test cond. A for gross leaks | | --- | $5x10^{-7}$ | | atm cc/sec |
| Moisture resistance | 1021 | | | --- | --- | --- | --- |
| End points: (See 4.4.2.) | | | | | | | |
| Collector to base cutoff current | 3036 | Bias cond. D; $V_{CB}$ = 30 Vdc | | $I_{CBO}$ | --- | 0.1 | μAdc |
| Collector to emitter voltage (saturated) | 3071 | $I_C$ = 150 mAdc; $I_B$ = 15 mAdc; pulsed (see 4.4.1) | | $V_{CE(sat)}$ | 0.3 | 1.5 | Vdc |
| Base emitter voltage (saturated) | 3066 | Test cond. A; $I_C$ = 150 mAdc; $I_B$ = 15 mAdc; pulsed (see 4.4.1) | | $V_{BE(sat)}$ | --- | 1.3 | Vdc |
| Subgroup 3 | | | 10 | | | | |
| Shock | 2016 | Nonoperating; 1500 G; 0.5 msec; 5 blows in each orientation: $X_1$, $Y_1$, $Y_2$ and $Z_1$ | | --- | --- | --- | --- |
| Vibration fatigue | 2046 | Nonoperating | | --- | --- | --- | --- |
| Vibration, variable frequency | 2056 | | | --- | --- | --- | --- |
| Constant acceleration | 2006 | 20,000 G; in each orientation: $X_1$, $Y_1$, $Y_2$, and $Z_1$ | | --- | --- | --- | --- |
| End points: (Same as subgroup 2) | | | | | | | |
| Subgroup 4 | | | 20 | | | | |
| Terminal strength (lead fatigue) | 2036 | Test cond. E | | --- | --- | --- | --- |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.

TABLE II. Group B inspection - Continued

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 5 | | | 20 | | | | |
| Salt atmosphere (corrosion) | 1041 | | | --- | --- | --- | --- |
| End points: (Same as subgroup 2) | | | | | | | |
| Subgroup 6 | | | 5 | | | | |
| High-temperature life (nonoperating) | 1031 | $T_{stg}$ = +200° C; t = 340 hrs (see 4.3.4) | | --- | --- | --- | --- |
| End points: (See 4.4.2.) | | | | | | | |
| Collector to base cutoff current | 3036 | Bias cond. D; $V_{CB}$ = 30 Vdc | | $I_{CBO}$ | --- | 0.2 | µAdc |
| Forward-current transfer ratio | 3076 | $I_C$ = 150 mAdc; $V_{CE}$ = 10 Vdc; pulsed (see 4.4.1) | | $h_{FE}$ | | | |
| 2N696 | | | | | 15 | 75 | --- |
| 2N697 | | | | | 30 | 150 | --- |
| Subgroup 7 | | | 7 | | | | |
| Steady-state operation life | 1026 | $T_A$ = 25° C; $V_{CE}$ = 30 Vdc; $P_T$ = 600 mW; t = 340 hrs (see 4.3.4) | | --- | --- | --- | --- |
| End points: (Same as subgroup 6) | | | | | | | |

TABLE III. Group C inspection

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 1 | | | 20 | | | | |
| Barometric pressure, reduced (altitude operation) | 1001 | Normal mounting; pressure = 8 mm Hg for 60 sec min | | --- | --- | --- | --- |
| Measurement during test: | | | | | | | |
| Collector to base cutoff current | 3036 | Bias cond. D; $V_{CB}$ = 60 Vdc | | $I_{CBO}$ | --- | 100 | µAdc |
| Thermal resistance, junction to case | 3151 | | | $\theta_{J-C}$ | --- | 0.075 | °C/mW |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.

TABLE III. Group C inspection - Continued

| Examination or test | MIL-STD-750 | | LTPD | Symbol | Limits | | |
|---|---|---|---|---|---|---|---|
| | Method | Details | | | Min | Max | Unit |
| Subgroup 2 | | | λ = 7 | | | | |
| High-temperature life (nonoperating) | 1031 | $T_{stg}$ = +200° C (see 4.3.4) | | --- | --- | --- | --- |
| End points: (Same as subgroup 6 of group B) | | | | | | | |
| Subgroup 3 | | | λ = 10 | | | | |
| Steady-state operation life | 1026 | $V_{CE}$ = 30 Vdc; $P_T$ = 600 mW; $T_A$ = 25° C (see 4.3.4) | | --- | --- | --- | --- |
| End points: (Same as subgroup 6 of group B) | | | | | | | |

5. PREPARATION FOR DELIVERY

5.1 See MIL-S-19500, section 5.

6. NOTES

6.1 Notes. The notes specified in MIL-S-19500 are applicable to this specification.

6.2 Ordering data.

(a) Lead finish, if other than gold-plated Kovar. (See 3.3.1.)
(b) Terminal-lead length, if other than specified in figure 1. (See 3.3.2.)

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

6.4 Substitution criteria. The devices covered herein are interchangeable with the corresponding devices covered by the superseded MIL-S-19500/99D.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL, MU, MI
Navy - SH
Air Force - 11, 17, 85

User activities:
Army - EL, SM
Navy - CG, MC, AS, OS
Air Force - 14, 19

Preparing activity:
Army - EL

(Project 5961-0009-19)

Code "C"



Source: https://assist.dla.mil -- Downloaded: 202610-18T13:11Z
Check the source to verify that this is the current version before use.

**INSTRUCTIONS:** In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required [illegible] too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would [illegible] problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If Block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

*NOTE:* This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

*(Fold along this line)*

*(Fold along this line)*

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

**OFFICIAL BUSINESS**
**PENALTY FOR PRIVATE USE $300**

**BUSINESS REPLY MAIL**
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications - Electronics Command
ATTN: DRSEL-ED-TO
Fort Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

*(See Instructions – Reverse Side)*

| 1. DOCUMENT NUMBER | 2. DOCUMENT TITLE |
|---|---|
| | |

| 3a. NAME OF SUBMITTING ORGANIZATION | 4. TYPE OF ORGANIZATION *(Mark one)* |
|---|---|
| | ☐ VENDOR |
| b. ADDRESS *(Street, City, State, ZIP Code)* | ☐ USER |
| | ☐ MANUFACTURER |
| | ☐ OTHER *(Specify)*: _____ |

**5. PROBLEM AREAS**

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

**6. REMARKS**

| 7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional | b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional |
|---|---|
| c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional | 8. DATE SUBMISSION *(YYMMDD)* |
| | |

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:11Z
Check the source to verify that this is the current version before use.