MILITARY SPECIFICATION

TRANSISTOR, PNP, GERMANIUM, POWER

TYPES 2N1412 AND 2N1412A

This amendment forms a part of Military Specification MIL-S-19500/76C(NAVY), dated 20 September 1967.

Page 6

Table II, Group B inspection, Subgroup 2, Moisture resistance, under Details column: add "Omit initial conditioning".

Page 7

Table II, Group B inspection, Subgroup 7, Steady state operation life, Details column: Delete "V_{CE} = 40 Vdc".

Page 8

Table III, Group C inspection, Subgroup 3, Steady state operation life, Details column: Delete "V_{CE} = 40 Vdc".

Page 10

Delete figure 1 and substitute the attached figure 1.

Page 12

Delete figure 3 and substitute the attached figure 3.

1/ Changes from previous issue. The outside margins of this document have been marked "#" to indicate where changes (deletions, additions, and so forth) from the previous issue have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

User activities:
Navy - AS, OS, MC, CG, SH


Preparing activity:
Navy - EC

Agent: DSA - ES

(Project 5961-N398)

FSC 5961


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:08Z
Check the source to verify that this is the current version before use.

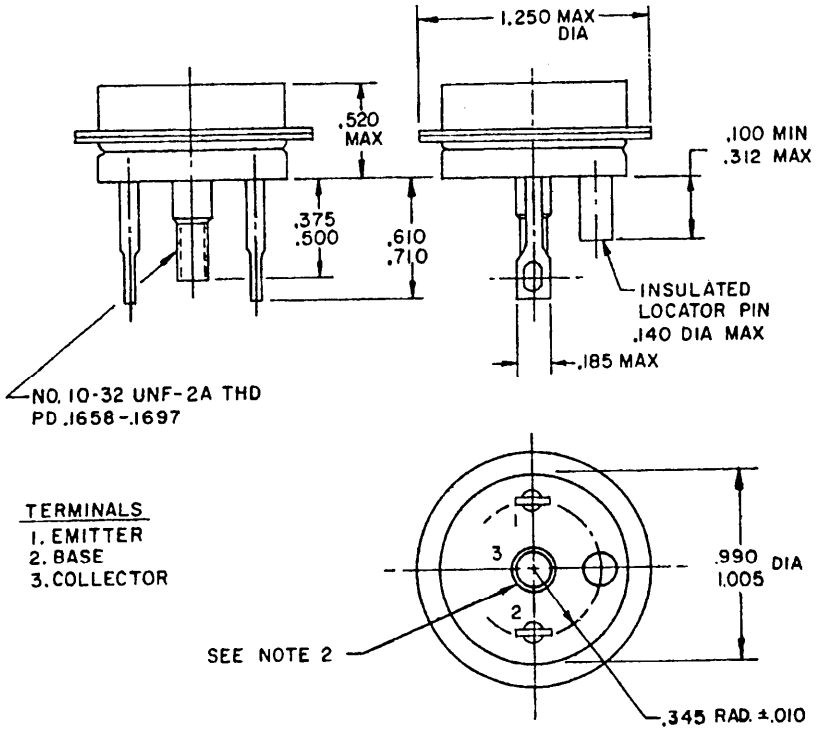

NOTES:
1. Dimensions are in inches.
2. The collector shall be internally connected to the mounting base.
3. The gage shown on figure 2 is acceptable for use in checking base and terminals on a go, no-go basis.

FIGURE 1. Physical dimensions of transistor, types 2N1412 and 2N1412A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:08Z
Check the source to verify that this is the current version before use.

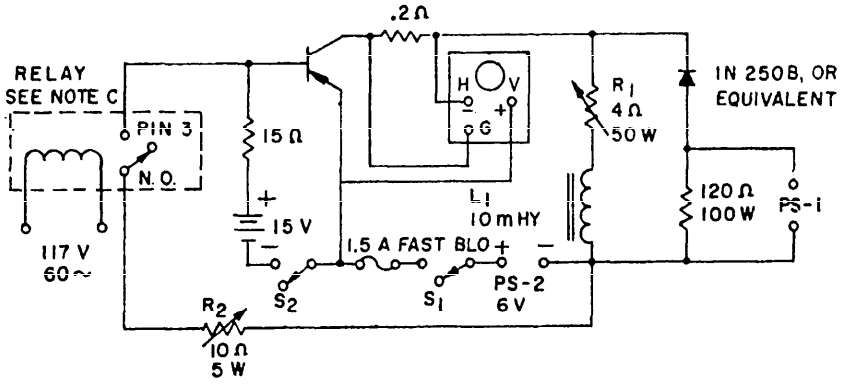

NOTES:
a. The inductance of L_1 is 10 millihenries. L_1 consists of 201 turns of #16 heavy Formvar wound on a powdered iron core. The core is Arnold Engineering part number C 54228-2, or equivalent.
b. Switch S_1 is used to eliminate arcs caused by removing the transistor from the test fixture.
c. Mercury wetted relay - Clare HGP-2036, or equivalent, with 12K series resistor. Duty cycle = 50 ± 5 percent.

Procedure shall be as follows:
1. With all power supplies at zero insert the test transistor.
2. Zero the spot intensification of the oscilloscope in the lower left corner of the grid.
3. Engage the 117 volts to the relay.
4. Turn of PS-2 and the 15 volt reverse bias supplies. (S-1 and S-2)
5. Adjust R_2 to mid range (approximately 5 ohms) and then adjust R_1 to obtain I_C = 2 amperes (observed on scope). Minor adjustment of R_2 may be necessary to assure a flat trace (saturation) at 2 amperes I_C.

FIGURE 3. V_{CEX}(sus) test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T13:08Z
Check the source to verify that this is the current version before use.