INCH-POUND
MIL-PRF-3098/50D
9 December 2004
SUPERSEDING
MIL-C-3098/50C
7 November 1984

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR72/U

Reactivated after 9 December 2004 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 17Hz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

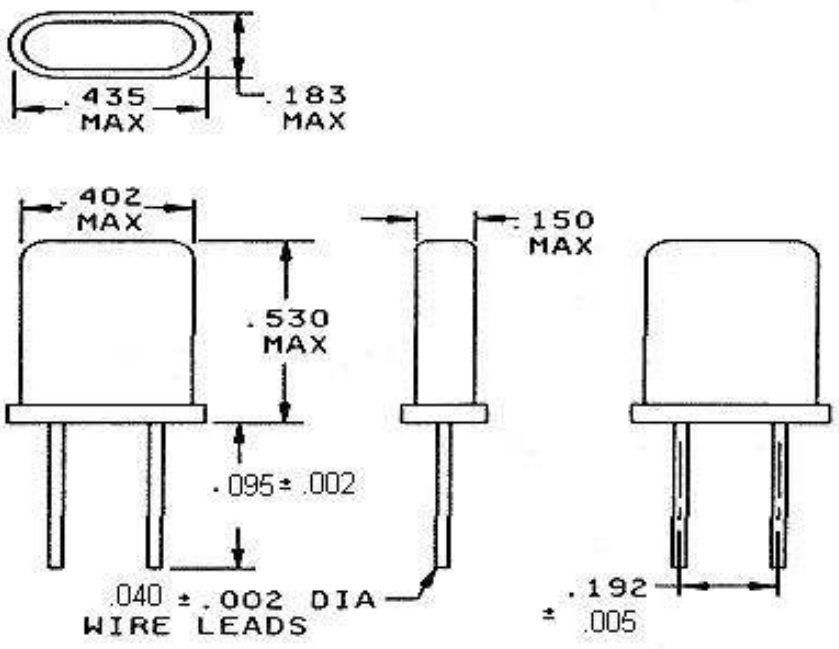

Inches	mm	Inches	mm
.002	0.05	.183	4.65
.005	0.13	.192	4.88
.040	1.02	.402	10.21
.095	2.41	.435	11.05
.150	3.81	.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR72/U.

AMSC N/A FSC 5955

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:31Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 17Hz to 61 MHz, inclusive.

Capacitance, shunt: 7.0 pF maximum.

Frequency tolerance (operating temperature range): ±50 parts per million (ppm).

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third mechanical overtone.

Calibration values:

Resistance: 40 ohms, maximum.

Resistor voltage drop: 0.28 volt.

Rated drive level: 2.0 ±0.4 mW.

Resonance: Series.

Operating temperature range: -55°C to +105°C, inclusive.

Shock (specified pulse):

Frequency change permitted: ±5ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration high frequency: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Aging:

Frequency change permitted: ±5 ppm.

* Reference documents. In addition to MIL-PRF-3098, this document references the following:

MIL-STD-202

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:31Z
Check the source to verify that this is the current version before use.

* The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - AR, MI
Navy - AS, CG, MC, OS, SH, TD
Air Force – 19, 99

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0779)

* NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:31Z
Check the source to verify that this is the current version before use.