
-MILITARY SPECIFICATION SHEET

CRYSTAL UNITS, QUARTZ, CR-74/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

Pertinent characteristics: 45 MHz to 125 MHz; fifth overtone; controlled; series.

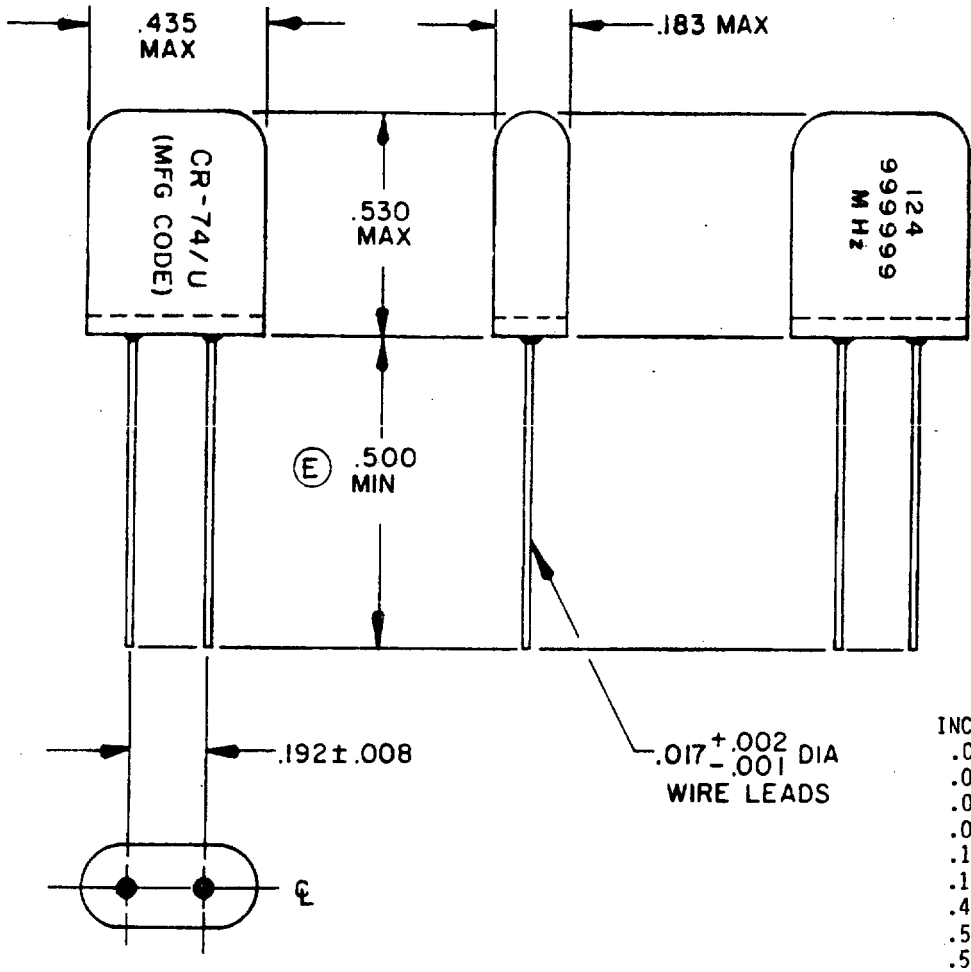

INCHES	MM
.001	0.03
.002	0.05
.008	0.20
.017	0.43
.183	4.65
.192	4.88
.435	11.05
.500	12.70
.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The type-designation, frequency, and code-designating characters shall not be less than .038 (0.97 mm) in height and not less than .027 (0.69 mm) in width.

FIGURE 1. Dimensions and configuration.

Ⓔ denotes changes

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:32Z
Check the source to verify that this is the current version before use.

FSC 5955

TABLE I. Requirements.

Requirements	Specified value or condition
(E) Holder	HC-26/U (MIL-H-10056/13) or HC-43/U (MIL-H-10056/9)
Dimensions, marking, and configuration	See figure
Frequency range	45 MHz to 125 MHz, inclusive
Capacitance, shunt	4.5 pF ±0.5
Frequency tolerance:	
Operating temperature range	±10 PPM
Frequency stability	±2.5 PPM
Equivalent resistance	20 ohms, minimum 50 ohms, maximum
Mode of oscillation	Fifth mechanical overtone
Temperature ranges:	
Operating	80°C to 90°C, inclusive
Operable	-55°C to +80°C, inclusive
Reference temperature	85°C ±1°C
Government reference standard test set	TS-683/TSM or AN/TSM-15 (above 100 MHz)
Calibration values:	
Resistance	40 ohms
Resistor voltage drop	0.20 volt
Drive level, rated	1.0 mW ±0.2
Unwanted mode	Twice main mode
Shock:	
Frequency change permitted	±3 PPM
Equivalent resistance change permitted	±15 percent
Vibration high frequency: 1/	
Frequency change permitted	±3 PPM
Equivalent resistance change permitted	±15 percent
Thermal shock:	
Frequency change permitted	±3 PPM
Equivalent resistance change permitted	±15 percent
Aging:	
Frequency change permitted	±3 PPM

1/ Method 204 of MIL-STD-202, test condition A.

NOTE: NATO guidance type NXT50.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI, SM
Navy - SH
Air Force - 11, 99
DLA - ES

User activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0630-02)

Source: https://assist.dla.mil -- Downloaded: 202610-16T16:32Z
Check the source to verify that this is the current version before use.