
MILITARY SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR-76A/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the crystal unit described herein shall consist of this specification and the latest issue of MIL-C-3098.

Pertinent characteristics: 16 to 61 MHz; third overtone; noncontrolled; series.

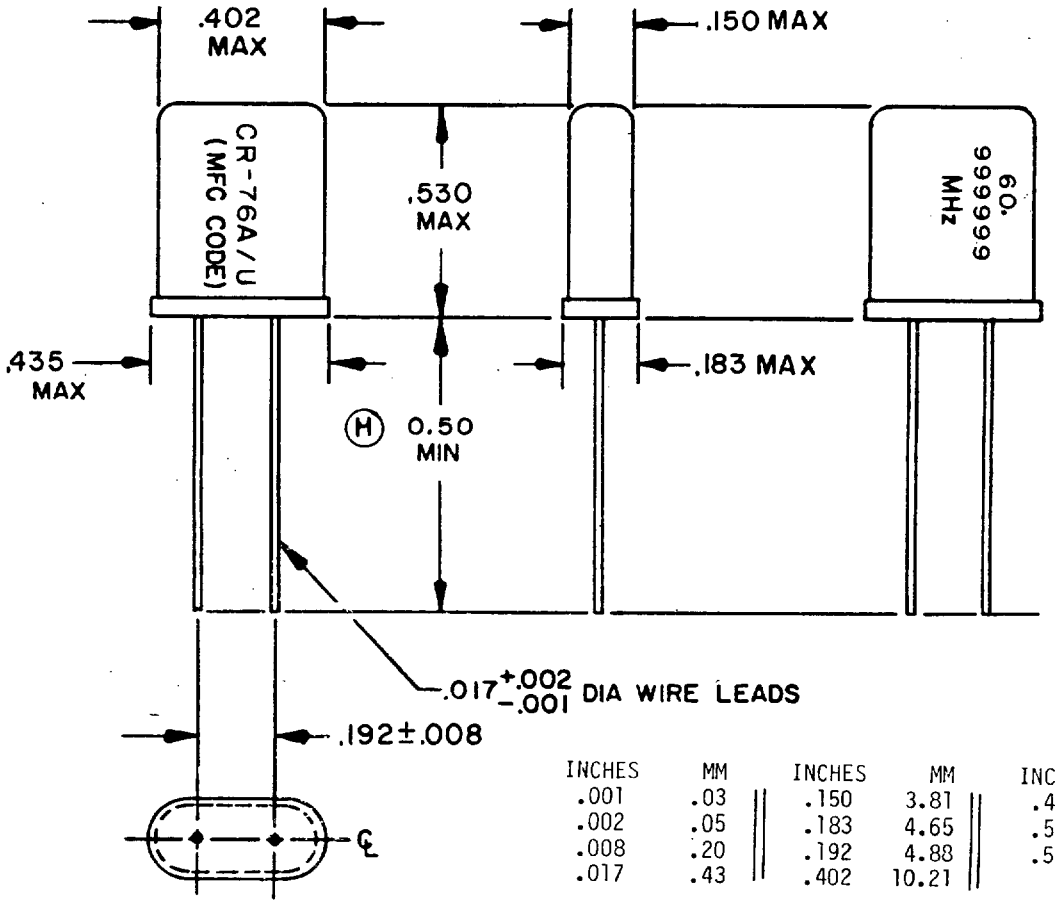

INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.150	3.81	.435	11.05
.002	.05	.183	4.65	.50	12.7
.008	.20	.192	4.88	.530	13.46
.017	.43	.402	10.21		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The type-designation, frequency, and code-designating characters shall be not less than .038 (.97 mm) in height and not less than .027 (.69 mm) in width.

FIGURE 1. Dimensions and configuration.

Ⓗ denotes changes

FSC 5955

Source: https://assist.dla.mil -- Downloaded: 202640-16T16:33Z
Check the source to verify that this is the current version before use.

TABLE I. Requirements.

	Requirements	Specified value or condition
H	Holder	HC-18/U or HC43/U (MIL-H-10056/9)
	Dimensions, marking, and configuration	See figure
	Frequency range	16 to 61 MHz, inclusive
	Capacitance, shunt	3.5 pF, maximum
	Frequency tolerances:	
	Primary (operating temperature range)	±20 PPM
	Secondary (operating temperature range)	±30 PPM
	Equivalent resistance	40 ohms, maximum
	Mode of oscillation	Third mechanical overtone
	Temperature ranges:	
	Primary	-40°C to +90°C, inclusive
	Secondary	-55°C to -40°C and +90°C to +105°C, inclusive
	Government reference standard test set	TS-683/TSM
	Calibration values:	
	Resistance	40 ohms
	Resistor voltage drop	0.28 volt
	Drive level, rated	2.0 ±0.4 mW
	Unwanted modes	Twice main mode
	Shock:	
	Frequency change permitted	±5 PPM
	Equivalent resistance change permitted	±10 percent
	Vibration high frequency: 1/	
	Frequency change permitted	±5 PPM
	Equivalent resistance change permitted	±10 percent
	Thermal shock:	
	Frequency change permitted	±5 PPM
	Equivalent resistance change permitted	±10 percent
	Aging:	
	Frequency change permitted	±5 PPM

1/ Method 204 of MIL-STD-202, test condition A.

NOTE: NATO preferred type NXT51.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR, SM
Navy - SH
Air Force - 11, 99
DLA - ES

Users activities:
Navy - AS, CG, MC, OS
Air Force - 17, 19

Agent:
DLA - ES

Preparing activity:
Army - ER

(Project 5955-0623-8)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:33Z
Check the source to verify that this is the current version before use.