INCH POUND
MIL-PRF-3098/53K
27 August 1997
SUPERSEDING
MIL-C-3098/53J
10 April 1995

PERFORMANCE SPECIFICATION SHEET

CRYSTAL UNIT, QUARTZ, CR76/U

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-PRF-3098.

Pertinent characteristics: 16 MHz to 61 MHz; third mechanical overtone; noncontrolled; series resonance.

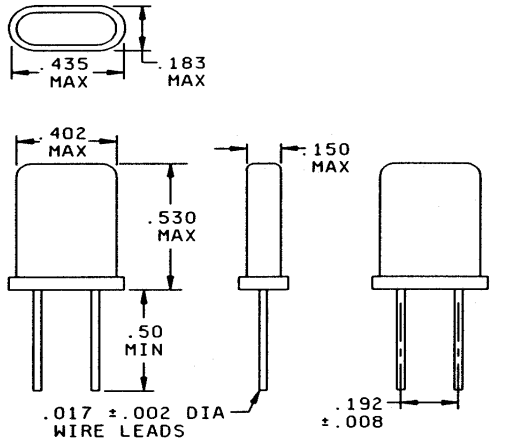

Inches	mm
.002	.05
.008	.20
.017	.43
.150	3.81
.183	4.65
.192	4.88
.402	10.21
.435	11.05
.500	12.70
.530	13.46

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking to be in accordance with MIL-PRF-3098.

FIGURE 1. Crystal unit - CR76/U.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:33Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions, marking, and configuration: See figure 1.

Frequency range: 16 MHz to 61 MHz, inclusive.

Capacitance, shunt: 3.5 pF, maximum.

Frequency tolerances:

Primary (operating temperature range): ±20 parts per million (ppm).

Secondary (operating temperature range): ±30 ppm.

Equivalent resistance: 40 ohms, maximum.

Mode of oscillation: Third mechanical overtone.

Temperature ranges:

Primary: -40°C to +90°C, inclusive.

Secondary: -55°C to -40°C and +90°C to +105°C, inclusive.

Rated drive level: 1.0 mW, maximum.

Resonance: Series.

Unwanted modes: Twice main mode.

Shock (specified pulse):

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Vibration high frequency: Method 204 of MIL-STD-202, test condition A.

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Thermal shock:

Frequency change permitted: ±5 ppm.

Equivalent resistance change permitted: ±10 percent.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:33Z
Check the source to verify that this is the current version before use.

Aging:

Frequency change permitted: ±5 ppm.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - EC
Air force - 85

Review activities:
Army - AR, MI, SM
Navy - AS, CG, MC, OS, SH
Air Force - 17, 19, 99
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

(Project 5955-0680-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T16:33Z
Check the source to verify that this is the current version before use.